

2.5" SATA SSD

3TS5-P

Customer: _____

Customer _____

Part _____

Number: _____

Innodisk _____

Part _____

Number: _____

Innodisk _____

Model Name: _____

Date: _____

Innodisk Approver	Customer Approver

Total Solution For
Industrial Flash Storage

Table of contents

LIST OF FIGURES	6
1. PRODUCT OVERVIEW	7
1.1 INTRODUCTION OF INNODISK 2.5" SATA SSD 3TS5-P.....	7
1.2 PRODUCT VIEW AND MODELS	7
1.3 SATA INTERFACE	8
1.4 2.5-INCH FORM FACTOR	8
2. PRODUCT SPECIFICATIONS.....	9
2.1 CAPACITY AND DEVICE PARAMETERS.....	9
2.2 PERFORMANCE	9
2.3.1 Power Requirement.....	11
2.3.2 Power Consumption.....	11
2.4 ENVIRONMENTAL SPECIFICATIONS	11
2.4.1 Temperature Ranges	11
2.4.2 Humidity.....	11
2.4.3 Shock and Vibration.....	11
2.4.4 Mean Time between Failures (MTBF).....	11
2.5 CE AND FCC COMPATIBILITY	12
2.6 RoHS COMPLIANCE	12
2.7 RELIABILITY.....	12
2.8 TRANSFER MODE	12
2.9 PIN ASSIGNMENT	13
2.10 MECHANICAL DIMENSIONS	14
2.11 ASSEMBLY WEIGHT	15
2.12 SEEK TIME	15
2.13 HOT PLUG	15
2.14 NAND FLASH MEMORY	15
3. THEORY OF OPERATION	16
3.1 OVERVIEW	16
3.2 SATA III CONTROLLER	16
3.3 RAID PROTECTION.....	16
3.4 ERROR DETECTION AND CORRECTION.....	17
3.5 WEAR-LEVELING	17
3.6 BAD BLOCKS MANAGEMENT.....	17
3.7 iDATAGUARD.....	17
3.8 GARBAGE COLLECTION/TRIM.....	17
3.9 iCELL TECHNOLOGY (OPTIONAL)	18
3.10 THERMAL SENSOR	18

3.11 TRIM	18
4. INSTALLATION REQUIREMENTS	19
4.1 2.5" SATA SSD 3TS5-P PIN DIRECTIONS	19
4.2 ELECTRICAL CONNECTIONS FOR 2.5" SATA SSD 3TS5-P	19
4.3 FORM FACTOR	19
4.4 DEVICE DRIVE	20
5. SMART FEATURE SET	21
5.1 SMART ATTRIBUTES.....	21
6. PART NUMBER RULE	23

REVISION HISTORY

Revision	Description	Date
Preliminary	First Released	May., 2019

List of Tables

TABLE 1: DEVICE PARAMETERS	9
TABLE 2: SEQUENTIAL READ AND WRITE PERFORMANCE	9
TABLE 3: RANDOM READ AND WRITE PERFORMANCE	9
TABLE 4: LATENCY(QD1)	10
TABLE 5: QUALITY OF SERVICE (QoS)	10
TABLE 6: INNODISK 2.5" SATA SSD 3TS5-P POWER REQUIREMENT	11
TABLE 7: POWER CONSUMPTION	11
TABLE 8: TEMPERATURE RANGE FOR 2.5" SATA SSD 3TS5-P	11
TABLE 9: SHOCK/VIBRATION TESTING FOR 2.5" SATA SSD 3TS5-P.....	11
TABLE 10: 2.5" SATA SSD 3TS5-P MTBF	12
TABLE 11: INNODISK 2.5" SATA SSD 3TS5-P PIN ASSIGNMENT	13

List of Figures

FIGURE 1: INNODISK 2.5" SATA SSD 3TS5-P	7
FIGURE 2: INNODISK FiD 2.5" SATA SSD 3TS5-P BLOCK DIAGRAM	16
FIGURE 3: SIGNAL SEGMENT AND POWER SEGMENT	19

1. Product Overview

1.1 Introduction of Innodisk 2.5" SATA SSD 3TS5-P

3TS5-P is innodisk's first product series supported 3D NAND flash. Innodisk 2.5" SATA SSD 3TS5-P is characterized by L³ architecture and RAID engine with the latest SATA III (6.0GHz) ID204 controller. Innodisk's exclusive L³ architecture is L² architecture multiplied LDPC (Low Density Parity Check). L² (Long Life) architecture is a 4K mapping algorithm that reduces WAF and features a real-time wear leveling algorithm to provide high performance and prolong lifespan. Innodisk 2.5" SATA SSD 3TS5-P is equipped RAID engine to offer additional level of data protection for exceptional reliability. It is designed for industrial field, and supports several standard features, including TRIM, NCQ, and S.M.A.R.T. In addition, Innodisk's exclusive industrial-oriented firmware provides a flexible customization service, making it perfect for a variety of industrial applications.

CAUTION *TRIM must be enabled.*

TRIM enables SSD's controller to skip invalid data instead of moving. It can free up significant amount of resources, extends the lifespan of SSD by reducing erase, and write cycles on the SSD. Innodisk's handling of garbage collection along with TRIM command improves write performance on SSDs.

1.2 Product View and Models

Innodisk 2.5" SATA SSD 3TS5-P is available in follow capacities:

2.5" SATA SSD 3TS5-P 256GB

2.5" SATA SSD 3TS5-P 512GB

2.5" SATA SSD 3TS5-P 1TB



Figure 1: Innodisk 2.5" SATA SSD 3TS5-P

1.3 SATA Interface

Innodisk 2.5" SATA SSD 3TS5-P supports SATA III interface, and compliant with SATA I and SATA II. SATA III interface can work with Serial Attached SCSI (SAS) host system, which is used in server computer. Innodisk 2.5" SATA SSD 3TS5-P is compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps /3.0Gbps/6.0Gbps data rate). SATA connector uses a 7-pin signal segment and a 15-pin power segment.

1.4 2.5-inch Form Factor

The Industry-standard 2.5-inch form factor design with metal material case is easy for installation, which has a compact design 69.85mm (W) x 100.00mm (L) x 6.90mm (H).

2. Product Specifications

2.1 Capacity and Device Parameters

2.5" SATA SSD 3TS5-P device parameters are shown in Table 1.

Table 1: Device parameters

Capacity	LBA	Cylinders	Heads	Sectors	User Capacity(MB)
256GB	418759312	16383	16	63	204472
512GB	837518624	16383	16	63	408945
1TB	1675037248	16383	16	63	817889

2.2 Performance

Burst Transfer Rate: 6.0Gbps

Table 2: Sequential Read and Write Performance

Item	Unit	256GB	512GB	1TB
Sequential* Read (max.)	MB/s	560	560	560
Sequential Write (max.)	MB/s	480	480	490
Steady Seq. Read	MB/s	530	530	530
Steady Seq. Write	MB/s	210	410	490

Note: * Sequential performance based on CrystalDiskMark 5.1.2 with file size 1000MB

Table 3: Random Read and Write Performance

Item	Unit	256GB	512GB	1TB
4KB Random* Read (QD32)	IOPS	48000	50000	51000
4KB Random Write (QD32)	IOPS	52000	81000	81000
8KB Random Read (QD32)	IOPS	40000	55000	57000
8KB Random Write (QD32)	IOPS	26000	48000	50000

Random 4KB 70/30 Read/Write(up to)	IOPS	42000	68000	76000
Random 8KB 70/30 Read/Write(up to)	IOPS	23000	38000	43000

Note: * Random performance based on CrystalDiskMark 5.1.2 with file size 1000MB

Table 4: Latency(QD1)

Item	Unit	256GB	512GB	1TB
Sequential Read*	us	28	28	28
Random Read	us	127	127	127
Sequential Write	us	30	30	30
Random Write	us	32	32	32

Note: * Latency measured using 4KB(4,096 Bytes) transfer size with Queue Depth equal to 1 on a sequential and random workload

Table 5: Quality of Service (QoS)

Item	Unit	256GB	512GB	1TB
Quality of Service ^{1,2} (99.9%)				
Reads Queue Depth 1	ms	0.20	0.20	0.20
Reads Queue Depth 32	ms	1.80	1.70	1.70
Write Queue Depth 1	ms	0.25	0.30	0.5
Write Queue Depth 32	ms	17.30	3.00	3.60

Note:

1. Measured using FIO version 3.1 on Linux CentOS 7.3.1611, Kernel 4.8.6. Quality of Service measured using 4KB (4,096 bytes) transfer size on a random workload on a full Logical Block Address (LBA) span of the drive once the workload has reached steady state but including all background activities required for normal operation and data reliability.
2. Based on Random 4KB QD=1, 32 workloads, measured as the time taken for 99.9 percentile of commands to finish the round-trip from host to drive and back to host.

2.3 Electrical Specifications

2.3.1 Power Requirement

Table 6: Innodisk 2.5" SATA SSD 3TS5-P Power Requirement

Item	Symbol	Rating	Unit
Input voltage	V _{IN}	+5 DC +- 5%	V

2.3.2 Power Consumption

Table 7: Power Consumption

Mode	256GB (mA)	512GB (mA)	1TB (mA)
Read(RMS)	401	399	399
Read(Peak)	746	783	807
Write(RMS)	440	450	470
Write(Peak)	890	893	1230
Idle	201	207	202
Boot-Up	1030	1030	1030

2.4 Environmental Specifications

2.4.1 Temperature Ranges

Table 8: Temperature range for 2.5" SATA SSD 3TS5-P

Temperature	Range
Operating	Standard Grade: 0°C to +70°C
Storage	-55°C to +95°C

2.4.2 Humidity

Relative Humidity: 10-95%, non-condensing

2.4.3 Shock and Vibration

Table 9: Shock/Vibration Testing for 2.5" SATA SSD 3TS5-P

Reliability	Test Conditions	Reference Standards
Vibration	7 Hz to 2K Hz, 20G, 3 axes	IEC 68-2-6
Mechanical Shock	Duration: 0.5ms, 1500 G, 3 axes	IEC 68-2-27

2.4.4 Mean Time between Failures (MTBF)

Table 7 summarizes the MTBF prediction results for various 2.5" SATA SSD 3TS5-P configurations. The analysis was performed using a RAM Commander™ failure rate prediction.

- **Failure Rate:** The total number of failures within an item population, divided by the total number of life units expended by that population, during a particular measurement interval under stated condition.

- **Mean Time between Failures (MTBF):** A basic measure of reliability for repairable items: The mean number of life units during which all parts of the item perform within their specified limits, during a particular measurement interval under stated conditions.

Table 10: 2.5" SATA SSD 3TS5-P MTBF

Product	Condition	MTBF (Hours)
Innodisk 2.5" SATA SSD 3TS5-P	Telcordia SR-332 GB, 25°C	TBD

2.5 CE and FCC Compatibility

2.5" SATA SSD 3TS5-P conforms to CE and FCC requirements.

2.6 RoHS Compliance

2.5" SATA SSD 3TS5-P is fully compliant with RoHS directive.

2.7 Reliability

Parameter	Value	
Read Cycles	Unlimited Read Cycles	
Flash endurance	10,000 P/E cycles	
Wear-Leveling Algorithm	Support	
Bad Blocks Management	Support	
Error Correct Code	Support	
TBW* (Total Bytes Written) Unit:TB		
Capacity	Sequential workload	Enterprise workload
256GB	TBD	555.5
512GB	TBD	1111
1TB	TBD	2222
*Note:		
1. Sequential: Mainly sequential write, tested by Vdbench.		
2. Enterprise: Follow JESD218 Test method and JESD219A Workload, tested by ULINK.		
3. Based on out-of-box performance.		

2.8 Transfer Mode

2.5" SATA SSD 3TS5-P support following transfer mode:

Serial ATA III 6.0Gbps

Serial ATA II 3.0Gbps

Serial ATA I 1.5Gbps


2.9 Pin Assignment

Innodisk 2.5" SATA SSD 3TS5-P uses a standard SATA pin-out. See Table 8 for 2.5" SATA SSD 3TS5-P pin assignment.

Table 11: Innodisk 2.5" SATA SSD 3TS5-P Pin Assignment


Name	Type	Description
S1	GND	NA
S2	A+	Differential Signal Pair A
S3	A-	
S4	GND	NA
S5	B-	Differential Signal Pair B
S6	B+	
S7	GND	NA
Key and Spacing separate signal and power segments		
P1	NC	NA
P2	NC	NA
P3	NC	NA
P4	GND	NA
P5	GND	NA
P6	GND	NA
P7	V5	5V Power, Pre-Charge
P8	V5	5V Power
P9	V5	5V Power
P10	GND	NA
P11	DAS/DSS	Device Activity Signal / Disable Staggered
P12	GND	NA
P13	NC	NA
P14	NC	NA
P15	NC	NA

2.10 Mechanical Dimensions

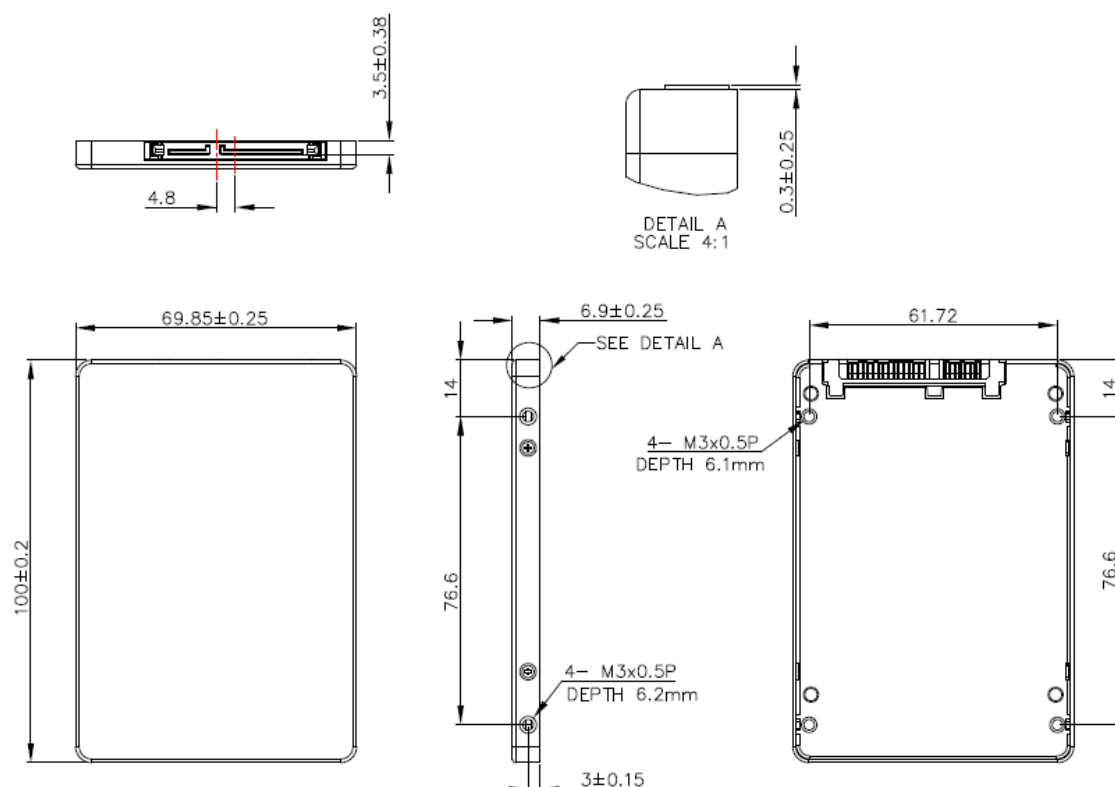

*SSD fixed with SATA Connector

The SATA connector of 2.5" SATA SSD 3TS5-P is designed with latch in order to fix the SSD and SATA cable or SATA socket in system to enhance shock and vibration resistance.

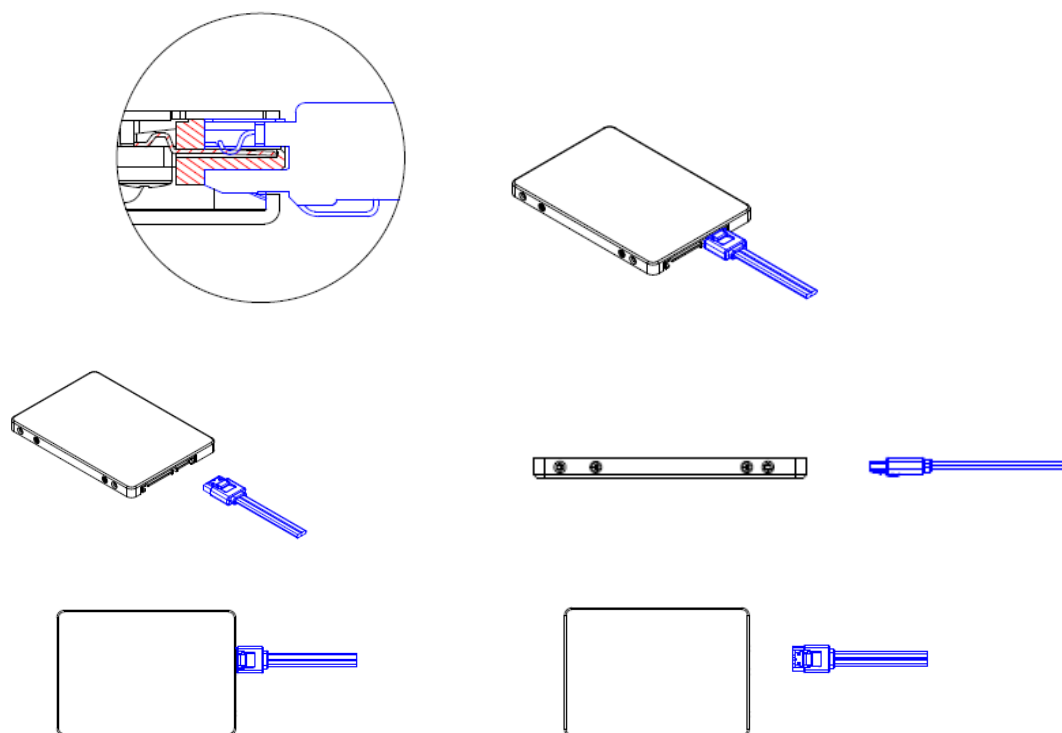

2.11 Assembly Weight

An Innodisk 2.5" SATA SSD 3TS5-P within 3D TLC flash ICs, 512B's weight is 70 grams approx.

2.12 Seek Time

Innodisk 2.5" SATA SSD 3TS5-P is not a magnetic rotating design. There is no seek or rotational latency required.

2.13 Hot Plug

The SSD support hot plug function and can be removed or plugged-in during operation. User has to avoid hot plugging the SSD which is configured as boot device and installed operation system.

Surprise hot plug: The insertion of a SATA device into a backplane (combine signal and power) that has power present. The device powers up and initiates an OOB sequence.

Surprise hot removal: The removal of a SATA device from a powered backplane, without first being placed in a quiescent state.

2.14 NAND Flash Memory

Innodisk 2.5" SATA SSD 3TS5-P uses 3D Triple Level Cell (TLC) NAND flash memory, which is non-volatility, high reliability and high speed memory storage.

3. Theory of Operation

3.1 Overview

Figure 2 shows the operation of Innodisk 2.5" SATA SSD 3TS5-P from the system level, including the major hardware blocks.

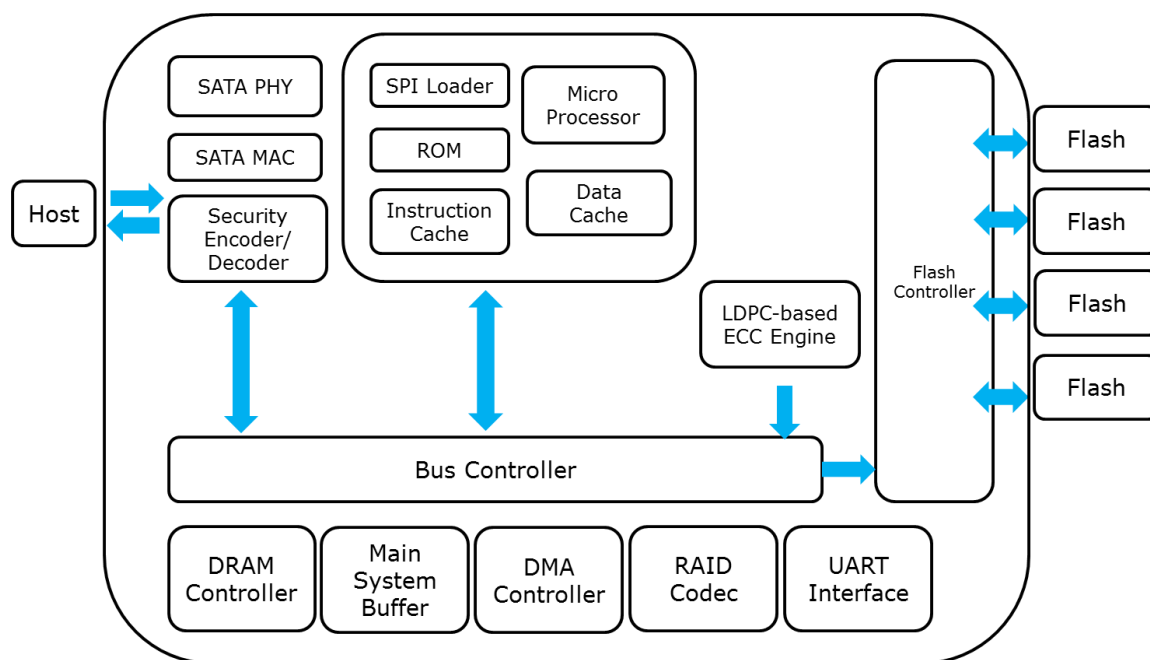


Figure 2: Innodisk 2.5" SATA SSD 3TS5-P Block Diagram

Innodisk 2.5" SATA SSD 3TS5-P integrates a SATA III controller and NAND flash memories. Communication with the host occurs through the host interface, using the standard ATA protocol. Communication with the flash device(s) occurs through the flash interface.

* iCell is optional feature with different part number.

3.2 SATA III Controller

Innodisk 2.5" SATA SSD 3TS5-P is designed with ID 210, a SATA III 6.0Gbps (Gen. 3) controller, which supports external DDR3 DRAM. The Serial ATA physical, link and transport layers are compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps/3.0Gbps/6.0Gbps data rate). The controller has 4 channels for flash interface.

3.3 RAID Protection

In case of uncorrectable errors occurring within a superblock, the RAID engine recovers the

uncorrectable error chunk by using a certain storage space of parity bits. Incorporated with LDPC, the RAID ensures a comprehensive level data integrity while providing a broad range of RAID overhead protection.

3.4 Error Detection and Correction

Innodisk 2.5" SATA SSD 3TS5-P is designed with hardware LDPC ECC engine with hard-decision and soft-decision decoding. Low-density parity-check (LDPC) codes have excellent error correcting performance close to the Shannon limit when decoded with the belief-propagation (BP) algorithm using soft-decision information.

3.5 Wear-Leveling

Flash memory can be erased within a limited number of times. This number is called the **erase cycle limit** or **write endurance limit** and is defined by the flash array vendor. The erase cycle limit applies to each individual erase block in the flash device.

Innodisk 2.5" SATA SSD 3TS5-P uses a static wear-leveling algorithm to ensure that consecutive writes of a specific sector are not written physically to the same page/block in the flash. This spreads flash media usage evenly across all pages, thereby extending flash lifetime.

3.6 Bad Blocks Management

Bad Blocks are blocks that contain one or more invalid bits whose reliability are not guaranteed. The Bad Blocks may be presented while the SSD is shipped, or may develop during the life time of the SSD. When the Bad Blocks is detected, it will be flagged, and not be used anymore. The SSD implement Bad Blocks management, Bad Blocks replacement, Error Correct Code to avoid data error occurred. The functions will be enabled automatically to transfer data from Bad Blocks to spare blocks, and correct error bit.

3.7 iDataGuard

Innodisk's iDataGuard is a comprehensive data protection mechanism that functions before and after a sudden power outage to SSD. Low-power detection terminates data writing before an abnormal power-off, while table-remapping after power-on deletes corrupt data and maintains data integrity. Innodisk's iDataGuard provides effective power cycling management, preventing data stored in flash from degrading with use.

3.8 Garbage Collection/TRIM

Garbage collection and TRIM technology is used to maintain data consistency and perform continual data cleansing on SSDs. It runs as a background process, freeing up valuable controller

resources while sorting good data into available blocks, and deleting bad blocks. It also significantly reduces write operations to the drive, thereby increasing the SSD's speed and lifespan.

3.9 iCell Technology (Optional)

iCell circuit is designed with several capacitors to be able to provide power after host power off. The SSD controller can write all DRAM buffer data to flash, so that is why 2.5" SATA SSD 3TS5-P can ensure all data can be written to disk without any data loss.

3.10 Thermal Sensor


When the surveillance system threatens to overheat, an immediate warning is issued. The SSD will automatically adjusting the transmission frequency to ensure continued performance and reliability.

3.11 TRIM

The TRIM command is designed to enable the operating system to notify the SSD which pages no longer contain valid data due to erases either by the user or operating system itself. During a delete operation, the OS will mark the sectors as free for new data and send a TRIM command to the SSD to mark them as not containing valid data. After that the SSD knows not to preserve the contents of the block when writing a page, resulting in less write amplification with fewer writes to the flash, higher write speed, and increased drive life.

4. Installation Requirements

4.1 2.5" SATA SSD 3TS5-P Pin Directions

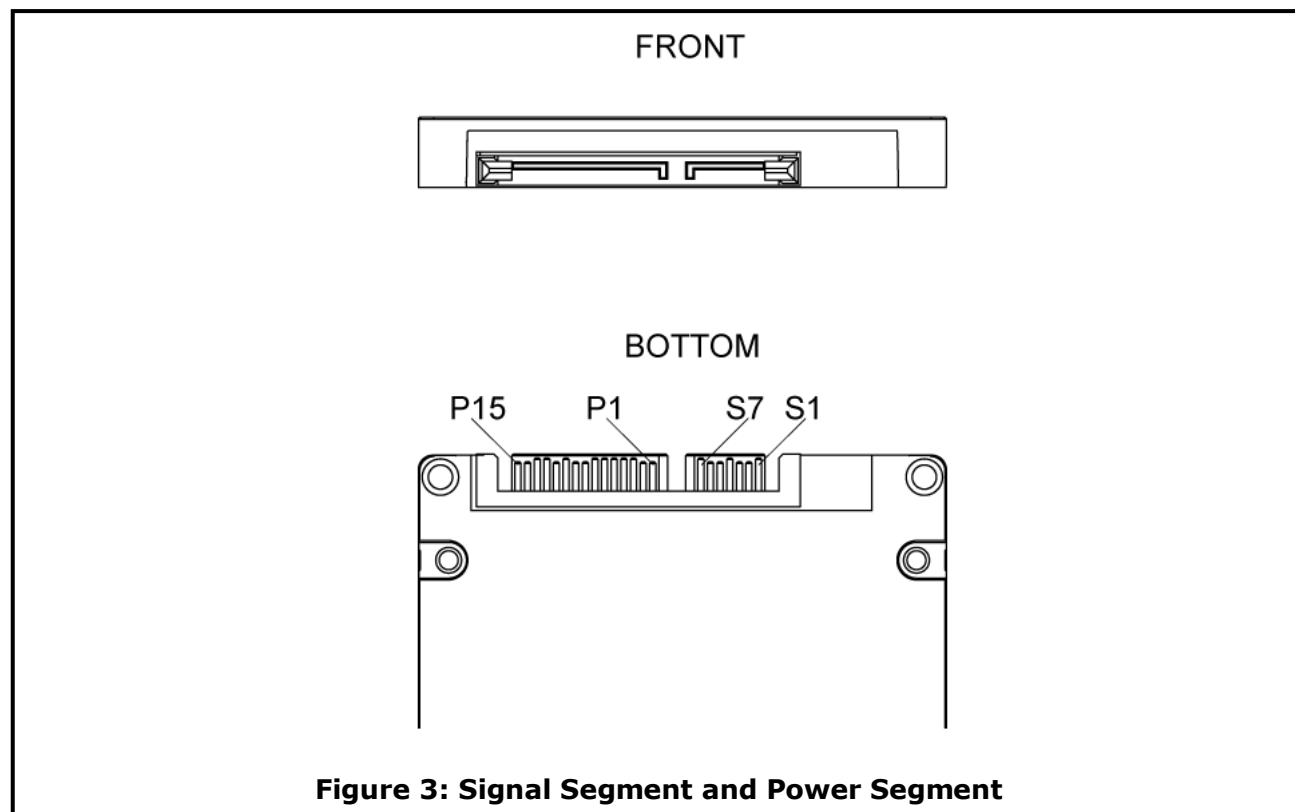

4.2 Electrical Connections for 2.5" SATA SSD 3TS5-P

A Serial ATA device may be either directly connected to a host or connected to a host through a cable. For connection via cable, the cable should be no longer than 1 meter. The SATA interface has a separate connector for the power supply. Please refer to the pin description for further details.

4.3 Form Factor

Please prepare following things:

- Screw driver.
- Four M3 screws. (Suggested torque value 3.0 Kgf.cm)
- SATA single cable (7-pin, Maximum length 1 meter).
- SATA power cable (15-pin).

Please turn off your computer, and open your computer's case. Find one of available 2.5-inch slot, and plug the SSD in. To use the screws fix the SSD. Plug in the SATA single cable, and power cable. Please boot the installation Operation System from CD-ROM, and install Operation System into SSD.

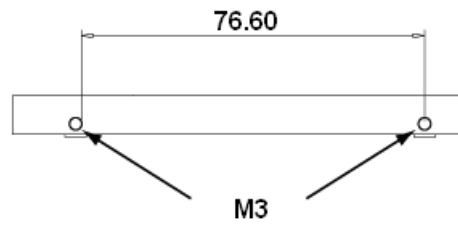


Figure 4: 2.5" SATA SSD 3TS5-P Mechanical Screw Hole

4.4 Device Drive

No additional device drives are required. Innodisk 2.5" SATA SSD 3TS5-P can be configured as a boot device.

5. SMART Feature Set

Innodisk 3TS5-P series support the SMART command set and defines some vendor-specific data to report SMART attributes of SSD.

Value	Command
D0h	Read Data
D1h	Read Attribute Threshold
D2h	Enable/Disable Autosave
D3h	Save Attribute Values
D4h	Execute OFF-LINE Immediate
D5h	Read Log
D6h	Return Status
D8h	Enable SMART Operations
D9h	Disable SMART Operations
DAh	Return Status

5.1 SMART Attributes

Innodisk 3TS5-P series SMART data attributes are listed in following table.

Attribute ID (hex)	Raw Attribute Value							Attribute Name
1 (01h)	MSB	00	00	00	00	00	00	Raw Read Error Rate
5 (05h)	LSB	MSB	00	00	00	00	00	Reallocated Sector Count
9 (09h)	LSB			MSB	00	00	00	Power-on Hours
12 (0Ch)	LSB			MSB	00	00	00	Power Cycle Count
160 (A0h)	LSB			MSB	00	00	00	Uncorrectable sector count when read/write
161 (A1h)	LSB	MSB	00	00	00	00	00	Number of valid spare block
163 (A3h)	LSB	MSB	00	00	00	00	00	Number of initial invalid block
164 (A4h)	LSB	MSB	00	00	00	00	00	Total erase count
165 (A5h)	LSB			MSB	00	00	00	Maximum erase count
166 (A6h)	LSB			MSB	00	00	00	Minimum erase count
167 (A7h)	LSB			MSB	00	00	00	Average erase count
168 (A8h)	LSB			MSB	00	00	00	Max erase count of spec
169 (A9h)	LSB			MSB	00	00	00	Remain Life (percentage)
175 (AFh)	LSB			MSB	00	00	00	Program fail count in worst die
176 (B0h)	LSB			MSB	00	00	00	Erase fail count in worst die

177 (B1h)	LSB			MSB	00	00	00	Total wear level count
178 (B2h)	LSB	MSB	00	00	00	00	00	Runtime invalid block count
181 (B5h)	LSB			MSB	00	00	00	Total program fail count
182 (B6h)	LSB	MSB	00	00	00	00	00	Total erase fail count
187 (BBh)	LSB			MSB	00	00	00	Uncorrectable error count
192 (C0h)	LSB	MSB	00	00	00	00	00	Power-Off Retract Count
194 (C2h)	MSB	00	00	00	00	00	00	Controlled temperature
195 (C3h)	LSB			MSB	00	00	00	Hardware ECC recovered
196 (C4h)	LSB			MSB	00	00	00	Reallocation event count
198 (C6h)	LSB			MSB	00	00	00	Uncorrectable error count off-line
199 (C7h)	LSB	MSB	00	00	00	00	00	UltraDMA CRC error count
225 (E1h)	LSB						MSB	Total LBAs written (each write unit = 32MB)
232 (E8h)	LSB	MSB	00	00	00	00	00	Available reserved space
241 (F1h)	LSB						MSB	Total LBAs written (each write unit = 32MB)
242 (F2h)	LSB						MSB	Total LBAs read (each write unit = 32MB)

6. Part Number Rule

CODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
	D	S	S	2	5	-	B	5	6	D	2	1	E	C	A	Q	H	(P)	-	X	X
Description	Disk	2.5" SATA SSD 3TS5-P					Capacity			Category			Flash mode	Operation Temp.	Internal Control	CH.	Flash	icell		Customized Code	
Definition																					
Code 1 st (Disk)													Code 13 th (Flash mode)								
D : Disk													E: 64 layers 3D TLC								
Code 2 nd ~ 5 th (Form Factor)													Code 14 th (Operation Temperature)								
SS25: 2.5" SATA SSD													C: Standard Grade (0℃ ~ +70℃)								
Code 7 th ~9 th (Capacity)																					
B56: 256GB													Code 15 th (Internal control)								
C12: 512GB													PCB version								
01T: 1TB																					
													Code 16 th (Channel of data transfer)								
													Q: Quad Channels								
Code 10 th ~12 th (Series)																					
D21: 2.5" SATA SSD 3TS5-P													Code 17 th (Flash Type)								
													H: Micron 3D TLC								
													Code 18 th (iCell)								
													P: iCell, reserved for optional function								
													Code 20 th ~21 th (Customized code)								

Appendix

宜鼎國際股份有限公司 Innodisk Corporation

Tel:(02)7703-3000 Fax:(02) 7703-3555 Internet: <http://www.innodisk.com/>

RoHS 自我宣告書 (RoHS Declaration of Conformity)

Manufacturer Product: All Innodisk EM Flash and Dram products

- 一、 宜鼎國際股份有限公司（以下稱本公司）特此保證售予貴公司之所有產品，皆符合歐盟 2011/65/EU 及 (EU) 2015/863 關於 RoHS 之規範要求。
Innodisk Corporation declares that all products sold to the company, are complied with European Union RoHS Directive (2011/65/EU) and (EU) 2015/863 requirement.
- 二、 本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。
Innodisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.
- 三、 本公司聲明我們的產品符合 RoHS 指令的附件中 (7a)、(7c-1) 允許豁免。
We declare, our products permitted by the following exemptions specified in the Annex of the RoHS directive.
- ※ (7a) Lead in high melting temperature type solders (i.e. lead-based alloys containing 85% by weight or more lead).
- ※ (7C-1) Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectric devices, or in a glass or ceramic matrix compound.

Name of hazardous substance	Limited of RoHS ppm (mg/kg)
鉛 (Pb)	< 1000 ppm
汞 (Hg)	< 1000 ppm
鎘 (Cd)	< 100 ppm
六價鉻 (Cr 6+)	< 1000 ppm
多溴聯苯 (PBBs)	< 1000 ppm
多溴二苯醚 (PBDEs)	< 1000 ppm
鄰苯二甲酸二(2-乙基己基)酯 (DEHP)	< 1000 ppm
鄰苯二甲酸丁酯 (BBP)	< 1000 ppm
鄰苯二甲酸二丁酯 (DBP)	< 1000 ppm
鄰苯二甲酸二異丁酯 (DIBP)	< 1000 ppm

立 保 證 書 人 (Guarantor)

Company name 公司名稱: Innodisk Corporation 宜鼎國際股份有限公司Company Representative 公司代表人: Randy Chien 顏川勝

innodisk

宜鼎國際股份有限公司
Innodisk Corporation

Page 2/2

Company Representative Title 公司代表人職稱: Chairman 董事長

Date 日期: 2018 / 07 / 01



innodisk

宜鼎國際股份有限公司
Innodisk Corporation
REACH Declaration

Tel: (02) 7703-3000 Fax: (02) 7703-3555 Internet: <http://www.innodisk.com/>

We hereby confirm that the product(s) delivered to

Innodisk P/N	Description
All Innodisk EM FLASH Products	

- ☐ contain(s) no hazardous substances or constituents exceeding the defined threshold 0.1 % by weight in homogenous material if not otherwise specified, as described in the candidate list table currently including 197 substances and shown on the ECHA website (<http://echa.europa.eu/de/candidate-list-table>).
- ☒ contain(s) one or more hazardous substances or constituents exceeding 0.1 % by weight in homogenous material if not otherwise specified in candidate list table. Where the threshold value is exceeded, the substances in question are to be declared in accompanying Appendix A.
- ☒ Comply with REACH Annex XVII.

Guarantor

Company name 公司名稱: Innodisk Corporation 宜鼎國際股份有限公司Company Representative 公司代表人: Randy Chien 簡川勝Company Representative Title 公司代表人職稱: Chairman 董事長Date 日期: 2019 / 01 / 31



VERIFICATION OF COMPLIANCE

This Verification of Compliance is hereby issued to the below named company. The test results of this report relate only to the tested sample identified in this report.

**Technical Standard: EMC DIRECTIVE 2014/30/EU
(EN55032 / EN55024)**

General Information

Applicant: Innodisk Corporation
5F., No. 237, Sec. 1, Datong Rd., Xizhi Dist.,
New Taipei City 22161, Taiwan (R.O.C)

Product Description

EUT Description: 2.5" SATA SSD
Brand Name: Innodisk
Model Number: 2.5" SATA SSD 3S*W-&
S:Flash type: (S:SLC, L:SLC, M:MLC, T:3D TLC, A-Z:Others)
*:Product line: (E:Embedded, G:EverGreen, R:InnoRobust, S:Server, V:InnoREC, A-Z:Others)
#:Product Generation: (empty, 0~9)
&:Product line: (empty, P:Plus)

Measurement Standard

EN 55032: 2012 / AC: 2013
CISPR 32: 2012
EN 61000-3-2: 2014
EN 61000-3-3: 2013
EN 55024: 2010 + A1: 2013
(IEC 61000-4-2: 2008; IEC 61000-4-3: 2006 + A1: 2007 + A2: 2010; IEC 61000-4-4: 2012;
IEC 61000-4-5: 2014; IEC 61000-4-6: 2013; IEC 61000-4-8: 2009; IEC 61000-4-11: 2004)

Measurement Facilities

Xindian Lab.: Compliance Certification Services Inc.
No.163-1, Jhongsheng Rd., Xindian Dist., New Taipei City, 23151 Taiwan.
Tel: +886-2-22170894 / Fax: +886-2-22171029

This device has been shown to be in compliance with and was tested in accordance with the measurement procedures specified in the Standards & Specifications listed above and as indicated in the measurement report number: T170504D02-E

Sam Hu / Assistant Manager

Date: May 4, 2017

隆盛科技股份有限公司
Compliance Certification Services Inc.



VERIFICATION OF COMPLIANCE

This Verification of Compliance is hereby issued to the below named company. The test results of this report relate only to the tested sample identified in this report.

**Technical Standard: FCC Part 15 Class B
IC ICES-003**

General Information

Applicant: Innodisk Corporation
5F., No. 237, Sec. 1, Datong Rd., Xizhi Dist.,
New Taipei City 22161, Taiwan (R.O.C)

Product Description

EUT Description: 2.5" SATA SSD
Brand Name: Innodisk
Model Number: 2.5" SATA SSD 3S*4-&
S:Flash type: (S:SLC, I:iSLC, M:MLC, T:3D TLC, A-Z:Others)
*:Product line: (E:Embedded, G:EverGreen, R:InnoRobust, S:Server, V:InnoREC, A-Z:Others)
#:Product Generation: (empty, 0-9)
&:Product line: (empty, P:Plus)

Measurement Facilities

Xindian Lab.: Compliance Certification Services Inc.
No.163-1, Zhongsheng Rd., Xindian Dist., New Taipei City, 23151 Taiwan.
Tel: +886-2-22170894 / Fax: +886-2-22171029

This device has been shown to be in compliance with and was tested in accordance with the measurement procedures specified in the Standards & Specifications listed above and as indicated in the measurement report number: T170504D02-D

Sam Hu / Assistant Manager

Date: May 4, 2017

CCSRF
程誠科技股份有限公司
Compliance Certification Services Inc.