



# ADP- 11x6 Display Monitor User Manual

**Release Date**

**Revision**

Apr 2010

V1.0

©2010 Aplex Technology, Inc.

All Rights Reserved.

Published in Taiwan

Aplex Technology, Inc.

15, No. 186, Jian Yi Road, Chung Ho City, Taipei County, Taiwan

Tel: 886-2-82262881 Fax: 886-2-82262883 E-mail: [aplex@aplex.com.tw](mailto:aplex@aplex.com.tw) URL: [www.aplex.com.tw](http://www.aplex.com.tw)

# Warning!

---

This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions manual. It may cause interference to radio communications. It has been tested and found to comply with the limits for a Class A computing device pursuant to FCC Rules, which are designed to provide reasonable protection against such interference when operated in a commercial environment. Operation of this equipment in a residential area is likely to cause interference in which case the user at his own expense will be required to take whatever measures may be required to correct the interference.

Electric Shock Hazard – Do not operate the machine with its back cover removed. There are dangerous high voltages inside.

## Disclaimer

**This information in this document is subject to change without notice. In no event shall Apex Technology Inc. be liable for damages of any kind, whether incidental or consequential, arising from either the use or misuse of information in this document or in any related materials.**

# Table of Contents

---

Warning!.....	2
Disclaimer.....	2

## Chapter 1

## Getting Started

---

1.1 Features.....	4
1.2 Specifications.....	4
1.3 Dimensions.....	6
1.4 Brief Description.....	10
1.5 Display Mode.....	11

## Chapter 2

## OSD

---

2.1 Front Panel Controls.....	12
2.2 OSD Controls.....	12
2.3 Main Menu.....	13
2.4 AD Board OSD Functions.....	15

## Figures

---

Figure 1.1: Dimensions of ADP-1126.....	6
Figure 1.2: Dimensions of ADP-1156.....	7
Figure 1.3: Dimensions of ADP-1176.....	8
Figure 1.4: Dimensions of ADP-1196.....	9
Figure 1.5: Front View.....	10
Figure 1.6: Rear View.....	10
Figure 1.7: VESA mounting of the ADP11x6.....	16

# Chapter 1

## 1.1 Features

- Stainless Steel Display
- Five edges panel NEMA 4/IP 65 rated
- Resistive touch screen (optional)
- VESA mount
- VGA Input, with optional DVI, Video or S-Video input
- Supports wide-ranging resolutions from 640x480 to up to 1600x1200 with auto phase and auto position

## 1.2 Specifications

### Display

Model No.	ADP-1126	ADP-1156	ADP-1176	ADP-1196
Display	12.1"	15"	17"	19"
Luminance	350 cd/m <sup>2</sup>	400 cd/m <sup>2</sup>	380 cd/m <sup>2</sup>	450 cd/m <sup>2</sup>
Viewing Angle	140(H)x110(V)	140(H)x125(V)	170(H)x160(V)	170(H)x160(V)
Resolution	800x600, RGB Vertical Stripe	1024x768, 16.2M colors	1280x1024, 16.7M colors	1280x1024, 16.7M colors
Backlight Lifetime	LED backlight 40,000hrs	CCFL tube x 4 50,000hrs	CCFL tube x 4 50,000hrs	CCFL tube x 4 50,000hrs
Touch Screen	Resistive antiglare	Resistive antiglare	Resistive antiglare	Resistive antiglare
OSD Controls/Indicators	Automatic screen, setup (OSD), brightness, contrast, horizontal/vertical position, image lock, color balance, video information, power on and sync detected			
OS Compatibility	Win 95/98, XP, 2000, NT 4.0, QNX, Linux			
Power Input	DC 12V, Optional 11~32V/DC			

### Environment

Operating Temperature: 0~50°C (32°~122°F)
Storage Temperature: -20~60°C (-4°~140°F)
Relative Humidity: 10~90% @40°C non-condensing, without touch screen
Vibration: 1g peak, 5~500Hz (at random)
Shock: 15G peak acceleration (11msec. duration)/operation
Ratings: Five edges panel NEMA 4/IP 65 rated
Certifications: Meet CE/FCC Class A

Model No.	ADP-1126	ADP-1156	ADP-1176	ADP-1196
Construction	Stainless Steel chassis			

Dimensions	330x50x260 (Wx Dx H / mm)	398x53x316mm (Wx Dx H / mm)	432x57.4x358 (Wx Dx H / mm)	470x60x388.6 (Wx Dx H / mm)
Mounting	VESA Mount 75x75			VESA Mount 100x100

# 1.3 Dimensions

ADP-1126



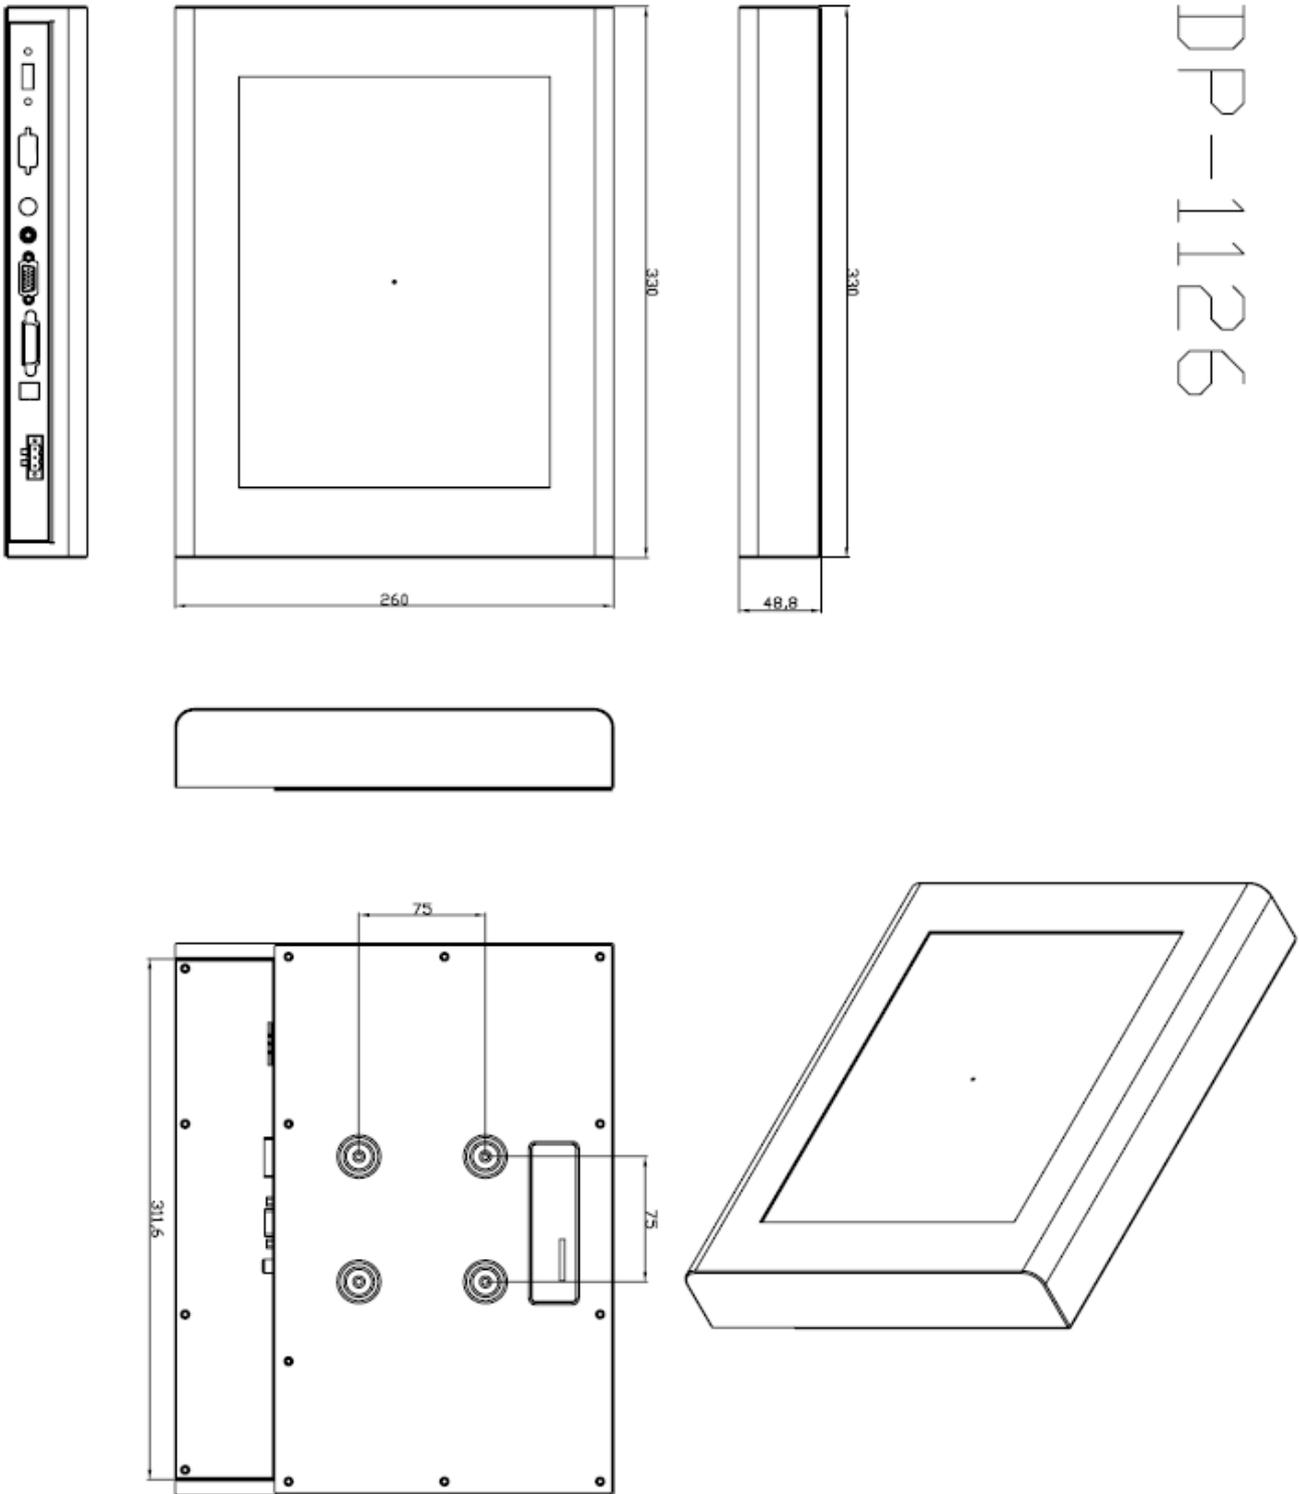


Figure 1.1: Dimensions of the ADP-1126

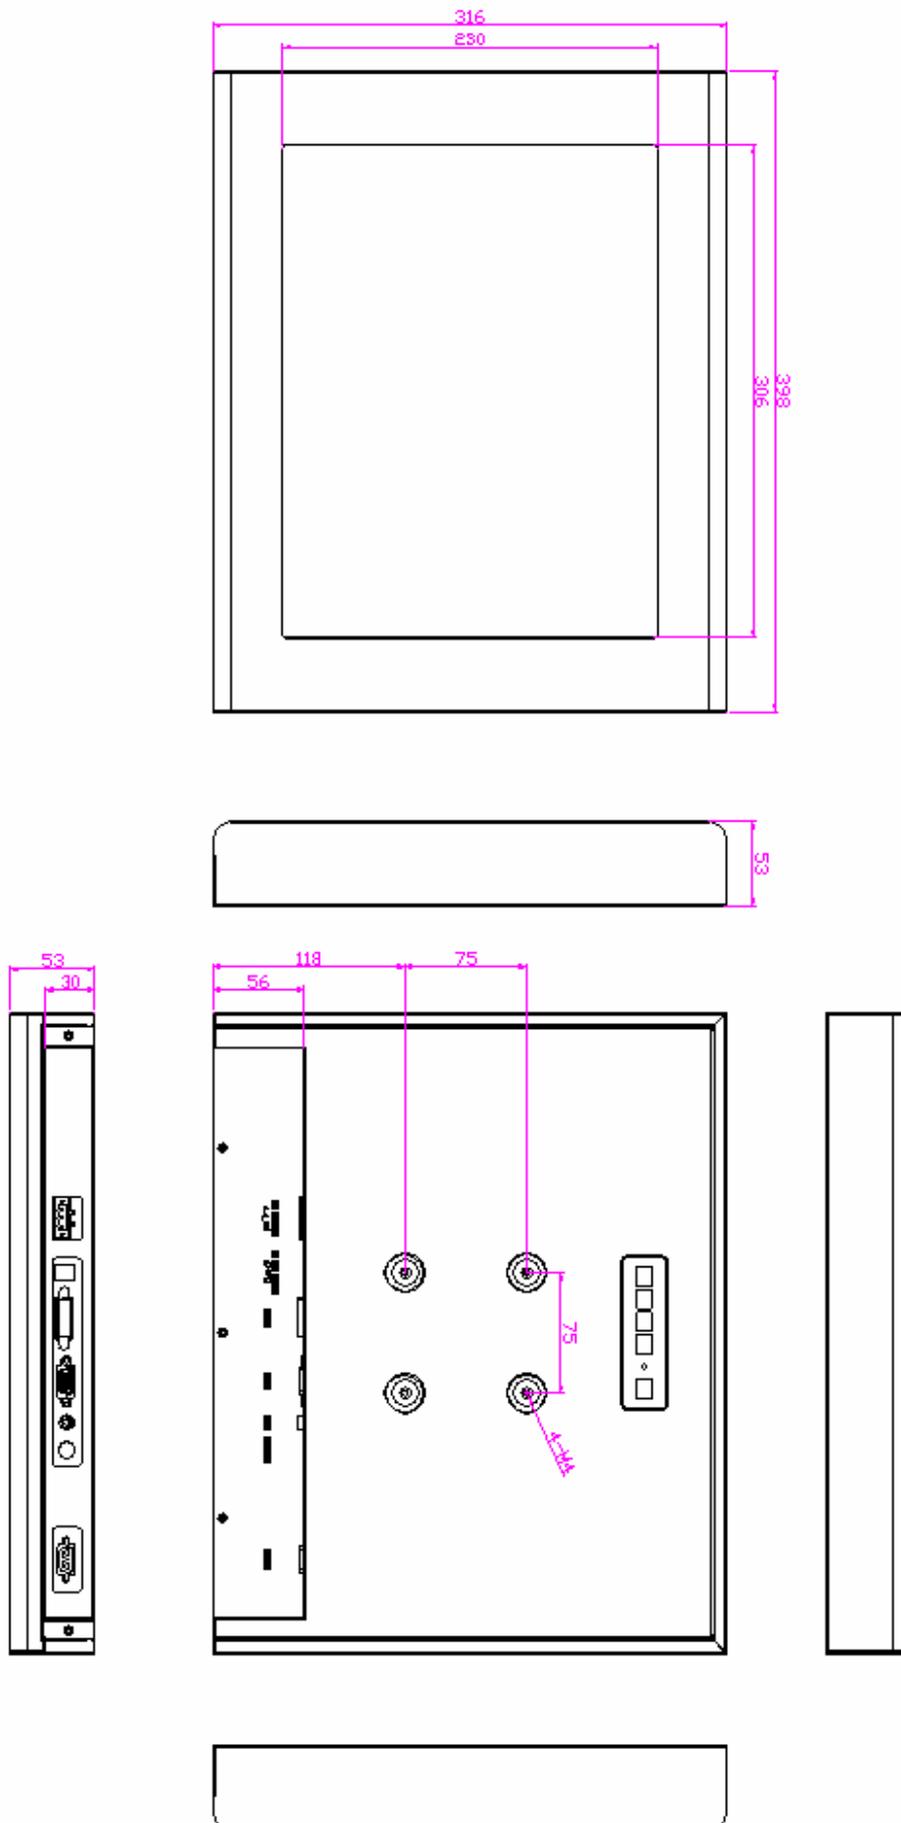


**Figure 1.2 Dimensions of the ADP-1156**

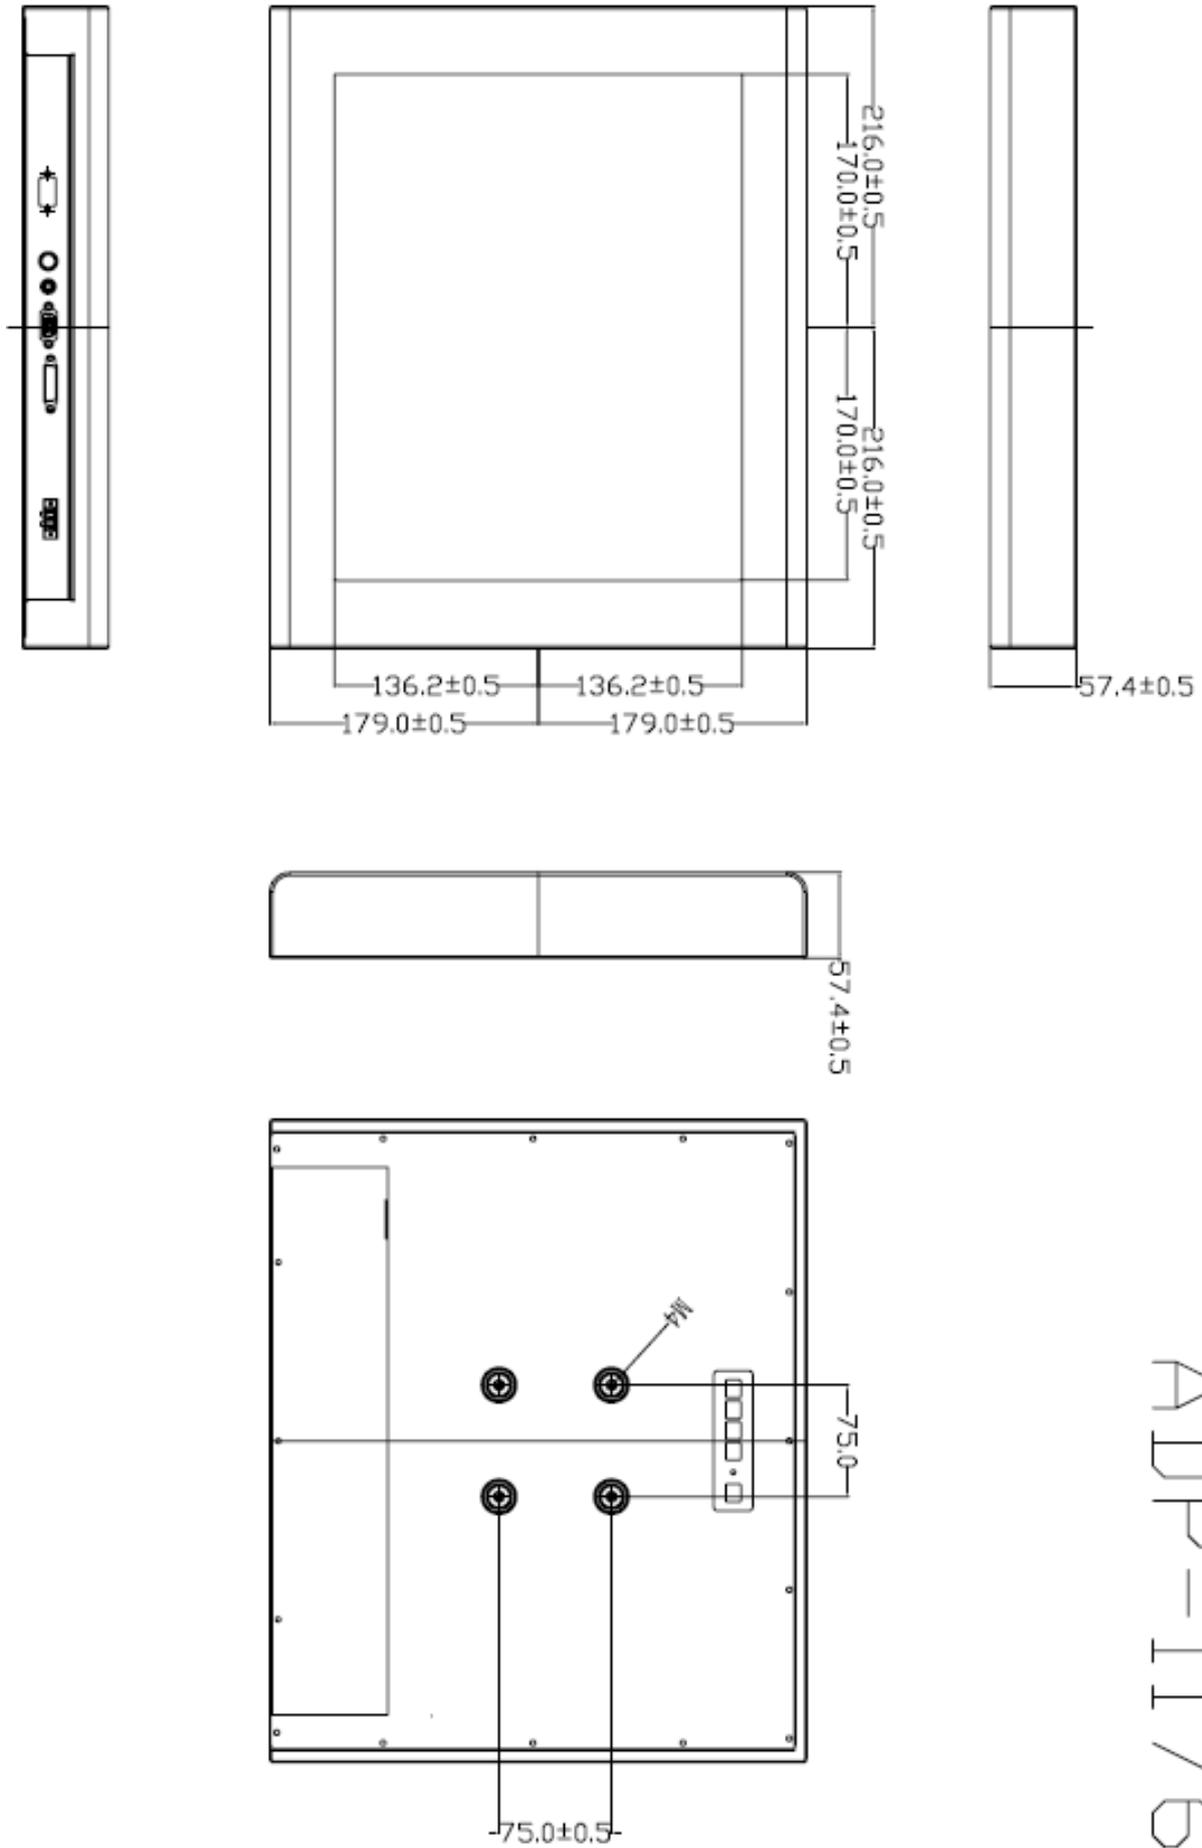

**Figure 1.3: Dimensions of the ADP-1176**

ADP-1176

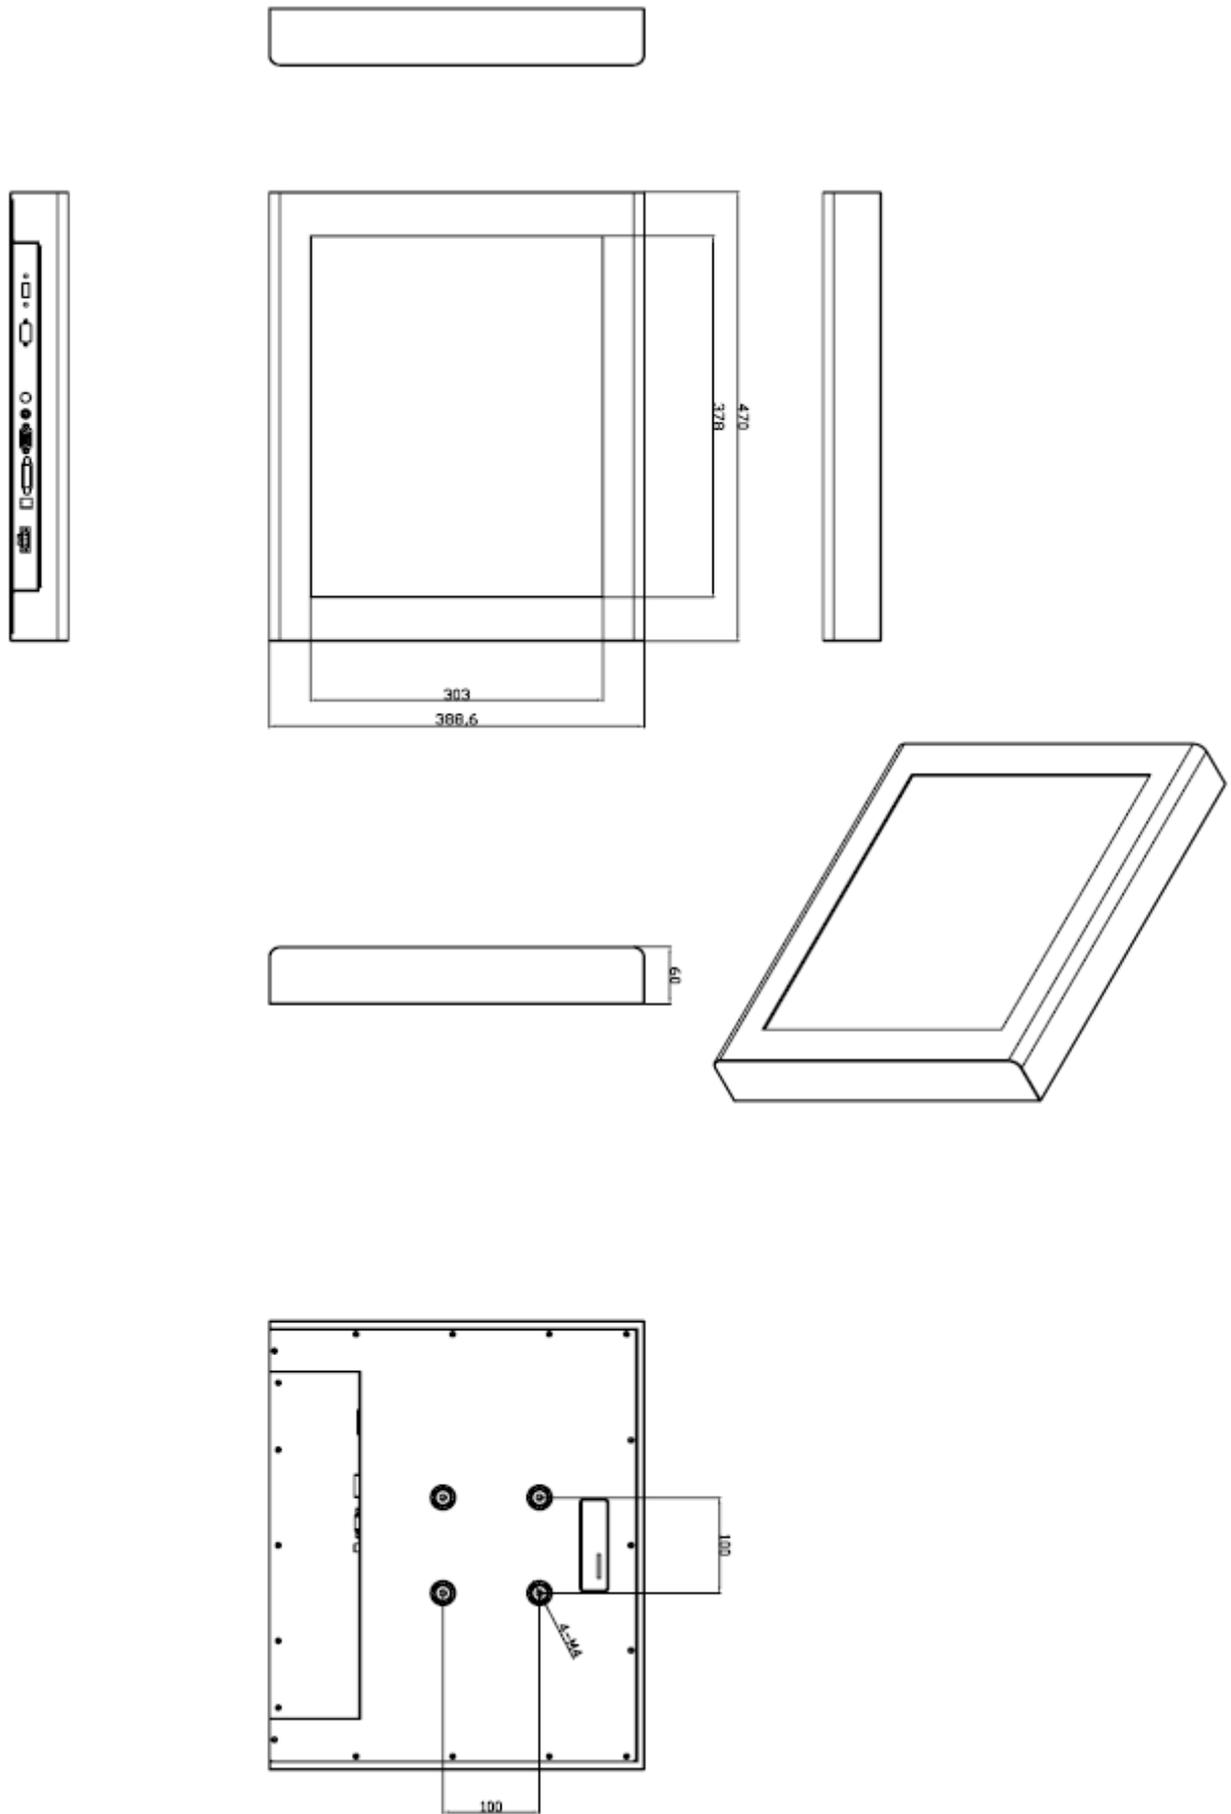

**Figure 1.4: Dimensions of the ADP-1196**

## 1.4 Brief Description

The ADP-11x6 features an excellent viewing ability for monitoring and control applications. It is available with resistive touch screen that is easy to use and maintain.

The front panel of the display monitor is sealed with gasket for NEMA 4/IP 65 rating when it is panel-mounted in a NEMA rated cabinet or enclosure.



**Figure 1.5: Front View of the ADP-11x6**



**Figure 1.6: Rear View of the ADP-11x6**

## 1.5 Display Mode

Display Mode		Hori. Sync (KHz)	Vert. Sync. (Hz)
VGA 640 x 480		31	60
		38	72
		38	75
SVGA 800 x 600		35	56
		38	60
		48	72
		47	75
XGA 1024 x 768		48	60
		56	70
		60	75
SXGA	1152 x 864	68	75
	1280 x 1024	64	60
		80	75

# Chapter 2

---

## 2.1 On Screen Display Controls



Power switch: To turn ON or OFF the power

➤ Shift the icon to the right side or shift it up

➤ Shift the icon to the left side or shift it down



Menu: To enter OSD menu for related icon and item.



Auto Button: One-touch auto adjustment

## 2.2 OSD Controls

To make any adjustment, select the following:

1. Press  (Menu) to show the OSD menu or disable the OSD menu.
2. Select the icon that you wish to adjust with the (  /  or +/-) key in the menu.
3. Press  (Menu) and then choose the item with the (  /  or +/-) key.
4. Press  (Menu) and then adjust the quality with the (  /  or +/-) key.

## 2.3 Main Menu



In the **Main** menu, there are the following items:

- Color
- Image Setting
- Position
- OSD Menu
- Language
- Misc
- Exit



For **Color**, check out the following:

- Contrast
- Brightness
- Color Adjust
- Color Temp
- Back




For **Image setting**, check out the following:

- Clock
- Phase
- Gamma
- Sharpness
- Back



In the **Position**, there are the following:

- H. Position
- V. Position
- Back

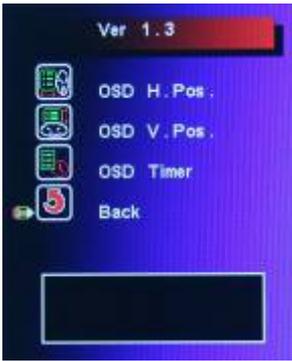


In the **OSD** menu, there are:

- OSD H. Pos.
- OSD V. Pos.
- OSD Timer
- Back



In the **Language** menu, there are:

- English
- Frances
- Germany
- Spanish
- Traditional Chinese
- Simplified Chinese
- Japanese

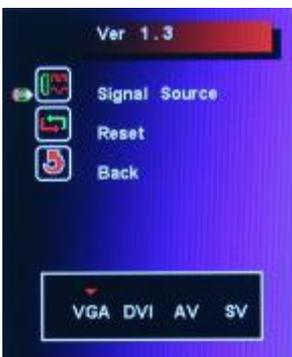

In the **Misc** menu, there are:

- Signal Source
  - Select VGA: Analogue VGA Input
  - Select DVI: Digital DVI-D Input
  - Select AV: Composite Video Input
  - Select SV: S-Video Video Input
- Reset
- Back

## 2.4 AD Board OSD Functions

### 1.) Getting into Burn-in Mode


Before setting into a burn-in mode, first disconnect the AC power cord. Then press (don't let them go) the   buttons until the AC power cord is connected and the "RGB" appears on the top left corner of your screen. Now it can be put into the burn-in mode for changing colors.

### 2.) Getting Out of Burn-in Mode

Before getting out of the burn-in mode, please first disconnect the AC power cord. Then press the  button (If not workable, press the  button and don't let them go) until the AC power cord is connected. Please don't let your fingers go until the AC power cord is connected again and the wording of "RGB" appears on the top left corner of your screen, and wait for 3 second. Under the non-signal entry situation, if **Cable Not Connected** is seen, exit is thus successfully made.

### When the Burn-in Mode is Unable to Eradicate...

- 1.) If the "RGB" is still on the top left corner of the screen, press  to enter "Miscellaneous" and choose "Reset", and then **Yes**, and press . When the screen goes black, disconnect power and repeat the above steps.
- 2.) If the "RGB" is not found, disconnect the AC power cord first. Then press the   buttons (don't let them go) until the AC power cord is connected, and wait for 2 to 3 seconds. When "RGB" appears, repeat the above steps.
- 3.) Functions of OSD Keys

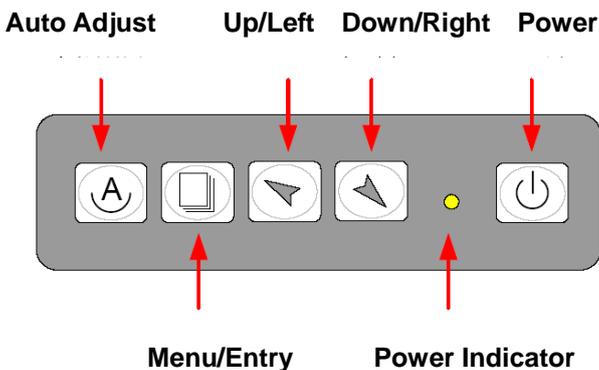


# Appendix

---

## VESA Mounting

The ADP-11x6 display monitor can be VESA-mounted as an option. Just carefully mount the arm onto the rear of the unit by fastening the given four screws as shown in Figure A.

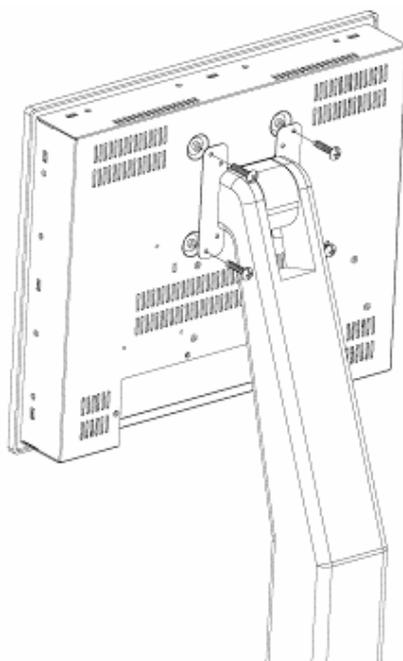

**Figure 1.7: VESA mounting of the ADP11x6**