

1.8" SATA SSD

3ME Series

Customer: _____
Customer
Part
Number: _____
Innodisk
Part
Number: _____
Innodisk
Model Name: _____
Date: _____

Innodisk Approver	Customer Approver

Total Solution For
Industrial Flash Storage

Table of contents

LIST OF FIGURES	6
1. PRODUCT OVERVIEW	7
1.1 INTRODUCTION OF INNODISK 1.8" SATA SSD 3ME	7
1.2 PRODUCT VIEW AND MODELS	7
1.3 SATA INTERFACE	7
1.4 1.8-INCH FORM FACTOR	8
2. PRODUCT SPECIFICATIONS.....	9
2.1 CAPACITY AND DEVICE PARAMETERS.....	9
2.2 PERFORMANCE	9
2.3 ELECTRICAL SPECIFICATIONS	9
2.3.1 Power Requirement	9
2.3.2 Power Consumption.....	9
2.4 ENVIRONMENTAL SPECIFICATIONS	10
2.4.1 Temperature Ranges	10
2.4.2 Humidity	10
2.4.3 Shock and Vibration.....	10
2.4.4 Mean Time between Failures (MTBF)	10
2.5 CE AND FCC COMPATIBILITY	11
2.6 RoHS COMPLIANCE	11
2.7 RELIABILITY.....	11
2.8 TRANSFER MODE	11
2.9 PIN ASSIGNMENT	11
2.10 MECHANICAL DIMENSIONS	12
2.11 ASSEMBLY WEIGHT	13
2.12 SEEK TIME	13
2.13 HOT PLUG	13
2.14 NAND FLASH MEMORY	13
3. THEORY OF OPERATION	14
3.1 OVERVIEW	14
3.2 SATA III CONTROLLER	14
3.3 ERROR DETECTION AND CORRECTION.....	14
3.4 WEAR-LEVELING	15
3.5 BAD BLOCKS MANAGEMENT.....	15
3.6 POWER CYCLING	15
3.7 GARBAGE COLLECTION.....	15
4. INSTALLATION REQUIREMENTS	16

4.1 1.8" SATA SSD 3ME PIN DIRECTIONS..... 16

4.2 ELECTRICAL CONNECTIONS FOR 1.8" SATA SSD 3ME..... 16

4.3 DEVICE DRIVE 16

5. PART NUMBER RULE 17

6.APPENDIX 18

REVISION HISTORY

Revision	Description	Date
Preliminary	First Released	JAN. 2014
Rev. 1.0	Update 512GB LBA, performance, and TBW	MAY. 2014
Rev. 1.1	Update Part Number Rule	AUG., 2014

List of Tables

TABLE 1: DEVICE PARAMETERS	9
TABLE 2: PERFORMANCE	9
TABLE 3: INNODISK 1.8" SATA SSD 3ME POWER REQUIREMENT	9
TABLE 4: POWER CONSUMPTION	9
TABLE 5: TEMPERATURE RANGE FOR 1.8" SATA SSD 3ME	10
TABLE 6: SHOCK/VIBRATION TESTING FOR 1.8" SATA SSD 3ME	10
TABLE 7: 1.8" SATA SSD 3ME MTBF	10
TABLE 8: INNODISK 1.8" SATA SSD 3ME PIN ASSIGNMENT	11

List of Figures

FIGURE 1: INNODISK 1.8" SATA SSD 3ME7

FIGURE 2: INNODISK FiD 1.8" SATA SSD 3ME BLOCK DIAGRAM14

FIGURE 3: SIGNAL SEGMENT AND POWER SEGMENT16

1. Product Overview

1.1 Introduction of Innodisk 1.8" SATA SSD 3ME

Innodisk 1.8" SATA SSD 3ME products provide high capacity flash memory Solid State Drive (SSD) that electrically complies with Serial ATA (SATA) standard. It supports SATA III standard (6.0GHz) with high performance. Innodisk 1.8" SATA SSD 3ME is designed for industrial field, and supports several standard features, including NCQ, and S.M.A.R.T. The SSD have good performance, no latency time and small seek time. It effectively reduces the booting time of operation system and the power consumption is less than hard disk drive (HDD).

1.2 Product View and Models

Innodisk 1.8" SATA SSD 3ME is available in follow capacities:

1.8" SATA SSD 3ME 8GB	1.8" SATA SSD 3ME 64GB
1.8" SATA SSD 3ME 16GB	1.8" SATA SSD 3ME 128GB
1.8" SATA SSD 3ME 32GB	1.8" SATA SSD 3ME 256GB
1.8" SATA SSD 3ME 512GB	



Figure 1: Innodisk 1.8" SATA SSD 3ME

1.3 SATA Interface

Innodisk 1.8" SATA SSD 3ME supports SATA III interface, and compliant with SATA I and SATA II. SATA III interface can work with Serial Attached SCSI (SAS) host system, which is used in server computer. Innodisk 1.8" SATA SSD 3ME is compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps /3.0Gbps/6.0Gbps data rate). SATA connector uses a 7-pin signal segment and a 9-pin power segment.

1.4 1.8-inch Form Factor

The industry standard 1.8-inch form factor design with metal material case is easy for installation because 1.8-inch is a popular form factor in industrial field. 1.8-inch is most laptop's hard disk's form factor. Innodisk 1.8" SATA SSD 3ME can easy install in laptop. Innodisk 1.8" SATA SSD 3ME has a compact design 54.0mm (W) x78.5mm (L) x 5.0mm (H).

2. Product Specifications

2.1 Capacity and Device Parameters

1.8" SATA SSD 3ME device parameters are shown in Table 1.

Table 1: Device parameters

Capacity	LBA	Cylinders	Heads	Sectors	User Capacity(MB)
8GB	15649200	13587	16	63	7641
16GB	31277232	16383	16	63	15272
32GB	62533296	16383	16	63	30533
64GB	125045424	16383	16	63	61057
128GB	250069680	16383	16	63	122104
256GB	500118192	16383	16	63	244193
512GB	1000215216	16383	16	63	488386

2.2 Performance

Burst Transfer Rate: 6.0Gbps

Table 2: Performance

Capacity	8GB	16GB	32GB	64GB	128GB	256GB	512GB
Sequential Read (max.)	120 MB/sec	240 MB/sec	460 MB/sec	460 MB/sec	460 MB/sec	460 MB/sec	300 MB/sec
Sequential Write (max.)	20 MB/sec	35 MB/sec	80 MB/sec	160 MB/sec	160 MB/sec	240 MB/sec	290 MB/sec

Note: Base on CrystalDiskMark 3.01 with file size 1000MB

2.3 Electrical Specifications

2.3.1 Power Requirement

Table 3: Innodisk 1.8" SATA SSD 3ME Power Requirement

Item	Symbol	Rating	Unit
Input voltage	V _{IN}	+5 DC +- 5%	V

2.3.2 Power Consumption

Table 4: Power Consumption

Mode	Power Consumption (mA)
Read	350 (max.)
Write	550 (max.)

Idle	150 (max.)
------	------------

* Target: 1.8" SATA SSD 3ME 512GB

2.4 Environmental Specifications

2.4.1 Temperature Ranges

Table 5: Temperature range for 1.8" SATA SSD 3ME

Temperature	Range
Operating	Standard Grade: 0°C to +70°C
	Industrial Grade: -40°C to +85°C
Storage	-55°C to +95°C

2.4.2 Humidity

Relative Humidity: 10-95%, non-condensing

2.4.3 Shock and Vibration

Table 6: Shock/Vibration Testing for 1.8" SATA SSD 3ME

Reliability	Test Conditions	Reference Standards
Vibration	7 Hz to 2K Hz, 20G, 3 axes	IEC 68-2-6
Mechanical Shock	Duration: 0.5ms, 1500 G, 3 axes	IEC 68-2-27

2.4.4 Mean Time between Failures (MTBF)

Table 7 summarizes the MTBF prediction results for various 1.8" SATA SSD 3ME configurations. The analysis was performed using a RAM Commander™ failure rate prediction.

- **Failure Rate:** The total number of failures within an item population, divided by the total number of life units expended by that population, during a particular measurement interval under stated condition.
- **Mean Time between Failures (MTBF):** A basic measure of reliability for repairable items: The mean number of life units during which all parts of the item perform within their specified limits, during a particular measurement interval under stated conditions.

Table 7: 1.8" SATA SSD 3ME MTBF

Product	Condition	MTBF (Hours)
Innodisk 1.8" SATA SSD 3ME	Telcordia SR-332 GB, 25°C	>3,000,000

2.5 CE and FCC Compatibility

1.8" SATA SSD 3ME conforms to CE and FCC requirements.

2.6 RoHS Compliance

1.8" SATA SSD 3ME is fully compliant with RoHS directive.

2.7 Reliability

Parameter	Value
Read Cycles	Unlimited Read Cycles
Wear-Leveling Algorithm	Support
Bad Blocks Management	Support
Error Correct Code	Support
Flash endurance	3,000 P/E cycles
TBW(Sequential Write)	
8GB	21.6
16GB	43.2
32GB	86.4
64GB	172.8
128GB	345.6
256GB	691.2
512GB	1382.4

2.8 Transfer Mode

1.8" SATA SSD 3ME support following transfer mode:

Serial ATA III 6.0Gbps

Serial ATA II 3.0Gbps

Serial ATA I 1.5Gbps

2.9 Pin Assignment


Innodisk 1.8" SATA SSD 3ME uses a standard SATA pin-out. See Table 8 for 1.8" SATA SSD 3ME pin assignment.

Table 8: Innodisk 1.8" SATA SSD 3ME Pin Assignment

Name	Type	Description
S1	GND	NA
S2	A+	Differential Signal Pair A
S3	A-	
S4	GND	NA
S5	B-	Differential Signal Pair B
S6	B+	
S7	GND	NA

Key and Spacing separate signal and power segments		
P1	V33	3.3V Power
P2	V33	3.3V Power, Pre-charge
P3	GND	
P4	GND	
P5	V5	5V Power, Pre-charge
P6	V5	5V Power
P7	R	Reserved
Key	Key	Key
P8	Optional	Vendor Specific
P9	Optional	Vendor Specific

2.10 Mechanical Dimensions

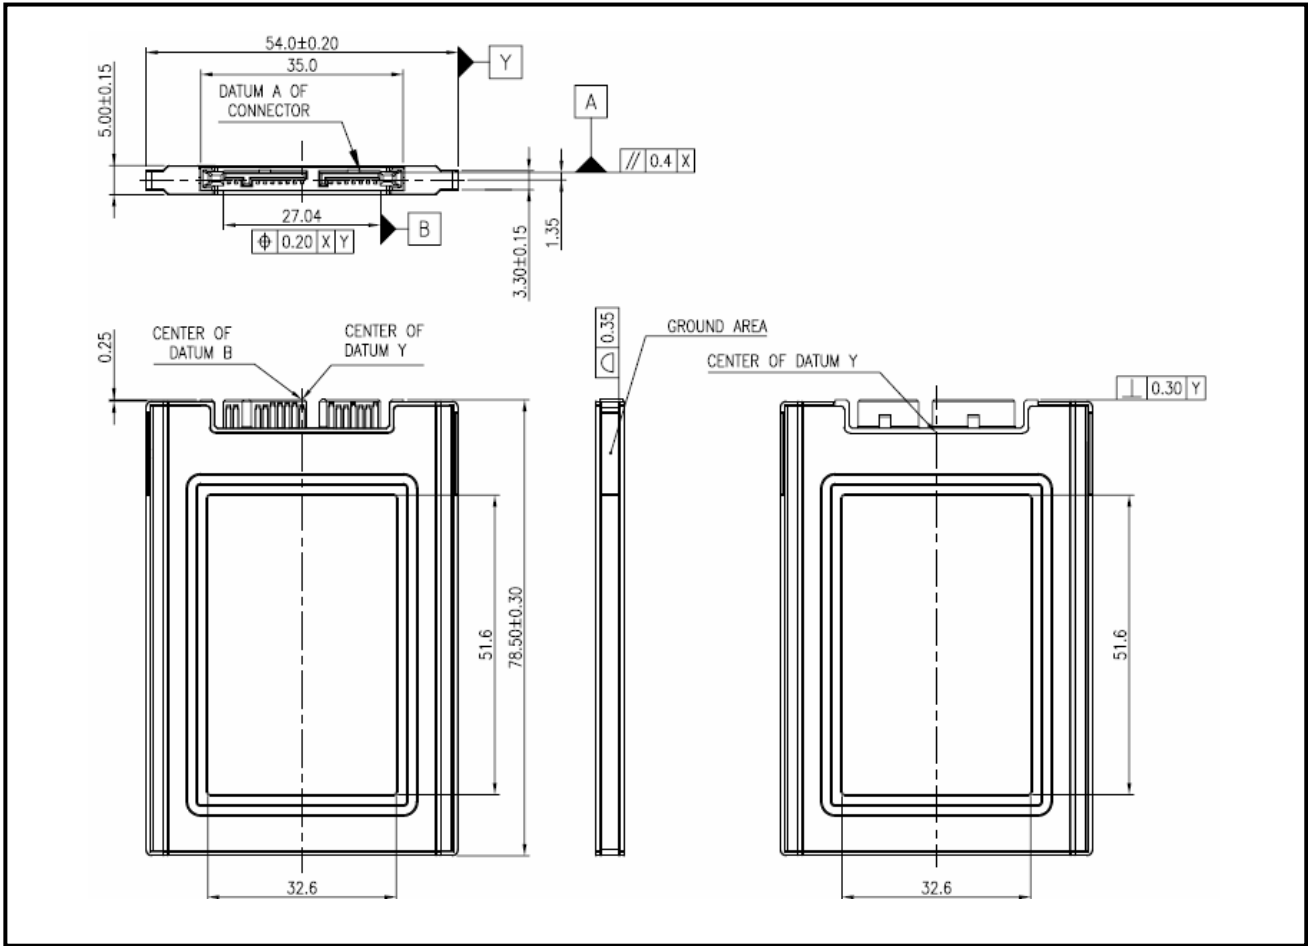

2.11 Assembly Weight

An Innodisk 1.8" SATA SSD 3ME within MLC flash ICs, 8GB's weight is 55 grams approx. The total weight of SSD will be less than 60 grams.

2.12 Seek Time

Innodisk 1.8" SATA SSD 3ME is not a magnetic rotating design. There is no seek or rotational latency required.

2.13 Hot Plug

The SSD support hot plug function and can be removed or plugged-in during operation. User has to avoid hot plugging the SSD which is configured as boot device and installed operation system.

Surprise hot plug : The insertion of a SATA device into a backplane (combine signal and power) that has power present. The device powers up and initiates an OOB sequence.

Surprise hot removal: The removal of a SATA device from a powered backplane, without first being placed in a quiescent state.

2.14 NAND Flash Memory

Innodisk 1.8" SATA SSD 3ME uses Multi Level Cell (MLC) NAND flash memory, which is non-volatility, high reliability and high speed memory storage.

3. Theory of Operation

3.1 Overview

Figure 2 shows the operation of Innodisk 1.8" SATA SSD 3ME from the system level, including the major hardware blocks.

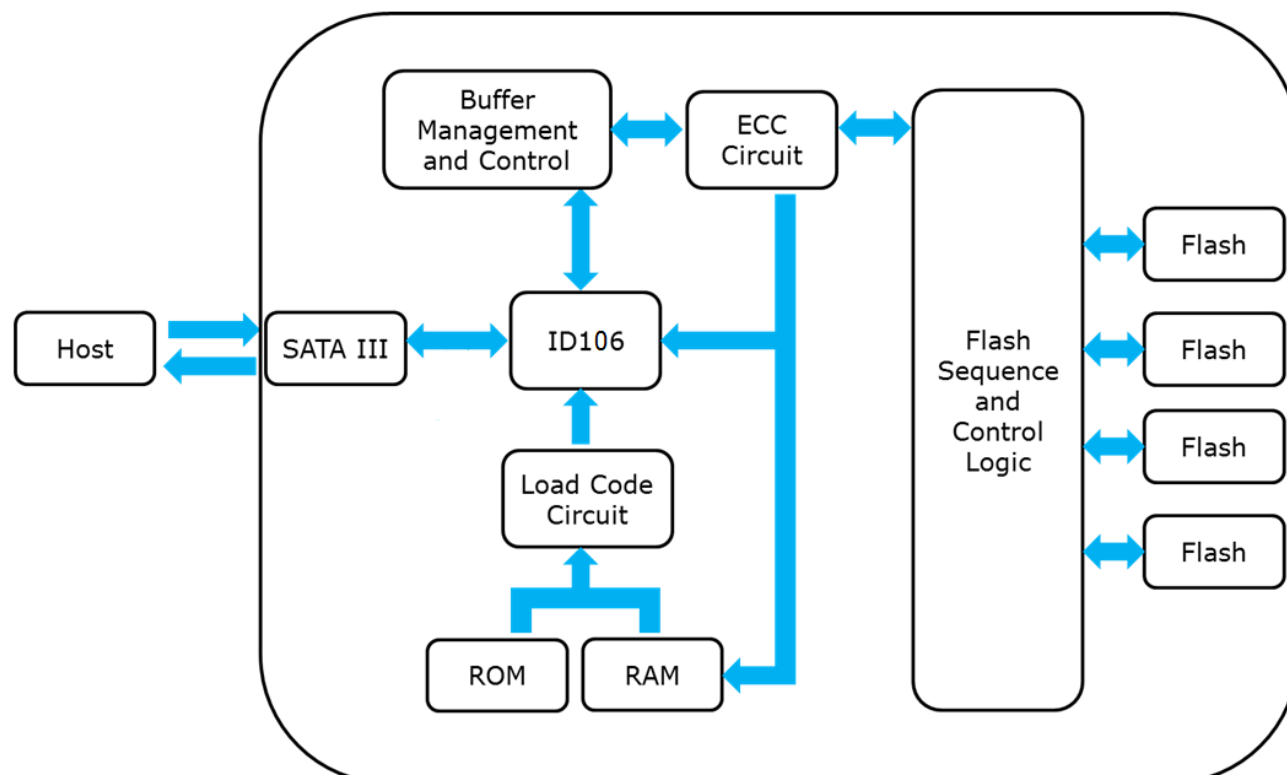


Figure 2: Innodisk FiD 1.8" SATA SSD 3ME Block Diagram

Innodisk 1.8" SATA SSD 3ME integrates a SATA III controller and NAND flash memories. Communication with the host occurs through the host interface, using the standard ATA protocol. Communication with the flash device(s) occurs through the flash interface.

3.2 SATA III Controller

Innodisk 1.8" SATA SSD 3ME is designed with ID 106, a SATA III 6.0Gbps (Gen. 3) controller, which supports external DDR3 DRAM. The Serial ATA physical, link and transport layers are compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps/3.0Gbps/6.0Gbps data rate). The controller has 4 channels for flash interface.

3.3 Error Detection and Correction

Highly sophisticated Error Correction Code algorithms are implemented. The ECC unit consists of

the Parity Unit (parity-byte generation) and the Syndrome Unit (syndrome-byte computation). This unit implements an algorithm that can correct 40 bits per 1024 bytes in an ECC block. Code-byte generation during write operations, as well as error detection during read operation, is implemented on the fly without any speed penalties.

3.4 Wear-Leveling

Flash memory can be erased within a limited number of times. This number is called the **erase cycle limit** or **write endurance limit** and is defined by the flash array vendor. The erase cycle limit applies to each individual erase block in the flash device.

Innodisk 1.8" SATA SSD 3ME uses a static wear-leveling algorithm to ensure that consecutive writes of a specific sector are not written physically to the same page/block in the flash. This spreads flash media usage evenly across all pages, thereby extending flash lifetime.

3.5 Bad Blocks Management

Bad Blocks are blocks that contain one or more invalid bits whose reliability are not guaranteed. The Bad Blocks may be presented while the SSD is shipped, or may develop during the life time of the SSD. When the Bad Blocks is detected, it will be flagged, and not be used anymore. The SSD implement Bad Blocks management, Bad Blocks replacement, Error Correct Code to avoid data error occurred. The functions will be enabled automatically to transfer data from Bad Blocks to spare blocks, and correct error bit.

3.6 Power Cycling

Innodisk's power cycling management is a comprehensive data protection mechanism that functions before and after a sudden power outage to SSD. Low-power detection terminates data writing before an abnormal power-off, while table-remapping after power-on deletes corrupt data and maintains data integrity. Innodisk's power cycling provides effective power cycling management, preventing data stored in flash from degrading with use.

3.7 Garbage Collection

Garbage collection technology is used to maintain data consistency and perform continual data cleansing on SSDs. It runs as a background process, freeing up valuable controller resources while sorting good data into available blocks, and deleting bad blocks. It also significantly reduces write operations to the drive, thereby increasing the SSD's speed and lifespan.

4. Installation Requirements

4.1 1.8" SATA SSD 3ME Pin Directions

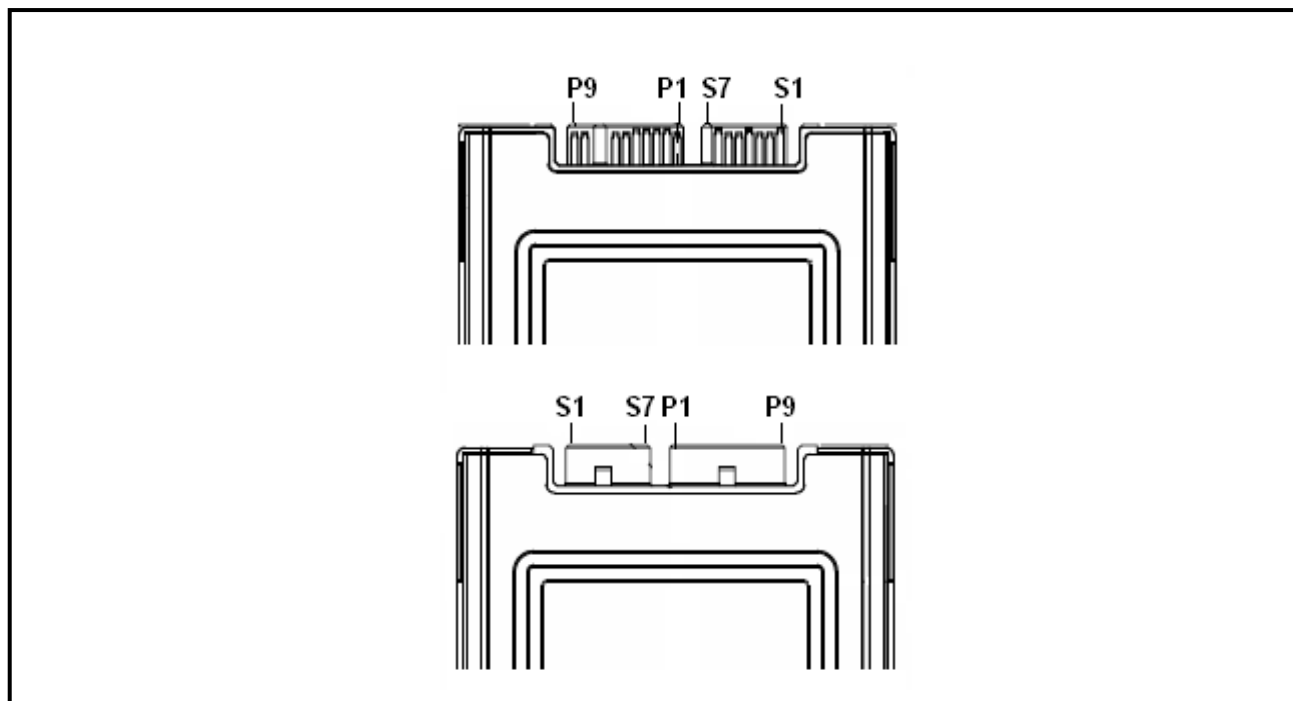


Figure 3: Signal Segment and Power Segment

4.2 Electrical Connections for 1.8" SATA SSD 3ME

A Serial ATA device may be either directly connected to a host or connected to a host through a cable. For connection via cable, the cable should be no longer than 1meter. The SATA interface has a separate connector for the power supply. Please refer to the pin description for further details.

4.3 Device Drive

No additional device drives are required. Innodisk 1.8" SATA SSD 3ME can be configured as a boot device.

5. Part Number Rule

CODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	D	E	S	1	8	-	C	1	2	D	0	6	R	C	1	Q	C	-	X	X
Description	Disk	1.8" SATA SSD 3ME				Capacity			Category			Flash Mode	Operation Temp.	Internal Control	CH.	Flash	-	Customized Code		
Definition																				
Code 1 st (Disk)												Code 13 th (Flash Mode)								
D : Disk												R: Toshiba A19 Synchronous Flash for 3ME/3MG-P/3MR-P Series								
Code 2 nd (Series)												Code 14 th (Operation Temperature)								
E: Embedded												C: Standard Grade (0℃ ~ +70℃)								
Code 3 rd ~ 5 th (Form Factor)																				
S18:1.8" SSD												Code 15 th (Internal Control)								
												Code 16 th (Channel of Data Transfer)								
Code 7 th ~9 th (Capacity)												S: Single Channel								
08G: 8GB												D: Dual Channels								
16G: 16GB												Q: Quad Channels								
32G: 32GB																				
64G: 64GB												Code 17 th (Flash Type)								
A28: 128GB												C: Toshiba MLC								
B56: 256GB																				
C12: 512GB												Code 19 th ~20 th (Customized Code)								
Code 10 th ~12 th (Series)																				
D06: 1.8" SATA SSD 3ME																				

6. Appendix

innodisk

宜鼎國際股份有限公司

Page 1/1

Tel:(02)2696-3000 Fax:(02)2696-2000 Internet: <http://www.innodisk.com/>

RoHS 自我宣告書(RoHS Declaration of Conformity)

Manufacturer Product: All Innodisk EM Flash and Dram products

宜鼎國際股份有限公司（以下稱本公司）特此保證售予貴公司之所有產品，皆符合歐盟 2011/65/EU 關於 RoHS 之規範要求。

InnoDisk Corporation declares that all products sold to the company, are complied with European Union RoHS Directive (2011/65/EU) requirement

一、本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。

InnoDisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

Name of hazardous substance	Limited of RoHS ppm (mg/kg)
Cd	< 100 ppm
Pb	< 1000 ppm
Hg	< 1000 ppm
Chromium VI (Cr+6)	< 1000 ppm
Polybromodiphenyl ether (PBDE)	< 1000 ppm
Polybrominated Biphenyls (PBB)	< 1000 ppm

立保證書人

Company name 公司名稱：InnoDisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人：Richard Lee 李鐘亮

Company Representative Title 公司代表人職稱：CEO 執行長

Date 日期：2013 / 09 / 25



Certificate

Issue Date: November 12, 2013
 Ref. Report No. ISL-13LE406CE

Product Name : 1.8" SATA SSD 3SR-P/3MR-P/3ME/3SE/3SE-P
 Model(s) : DRS18-XXXD67*#%*&; DES18-XXXD06*#%*&;
 DES18-XXXD67*#%*&
 Brand : Innodisk
 Responsible Party : Innodisk Corporation
 Address : 9F, No. 100, Sec. 1 Xintai 5th Rd., Xizhi City, Taipei 221, Taiwan

We, International Standards Laboratory, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in European Council Directive- EMC Directive 2004/108/EC. The device was passed the test performed according to :



Standards:

EN 55022: 2010 and CISPR 22: 2008 (modified)
 EN 61000-3-2: 2006+A1:2009 +A2:2009 and IEC 61000-3-2: 2005+A1:2008 +A2:2009
 EN 61000-3-3: 2008 and IEC 61000-3-3: 2008
 EN 55024: 2010 and CISPR 24: 2010
 EN 61000-4-2: 2009 and IEC 61000-4-2: 2008
 EN 61000-4-3: 2006+A1: 2008 +A2: 2010 and
 IEC 61000-4-3:2006+A1: 2007+A2: 2010
 EN 61000-4-4: 2004 +A1:2010 and IEC 61000-4-4: 2004 +A1:2010
 EN 61000-4-5: 2006 and IEC 61000-4-5: 2005
 EN 61000-4-6: 2009 and IEC 61000-4-6: 2008
 EN 61000-4-8: 2010 and IEC 61000-4-8: 2009
 EN 61000-4-11: 2004 and IEC 61000-4-11: 2004

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

International Standards Laboratory

Jim Chu
 Jim Chu / Director

☒ Lung-Tan LAB:
 No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.
 Lung-Tan Hsiang, Tao Yuan County 325, Taiwan
 Tel: 886-3-407-1718; Fax: 886-3407-1738



Certificate

Issue Date: November 12, 2013
 Ref. Report No. ISL-13LE406FB

Product Name : 1.8" SATA SSD 3SR-P/3MR-P /3ME /3SE/3SE-P
 Model(s) : DRS18-XXXD67*#%&; DES18-XXXD06*#%&;
 DES18-XXXD67*#%&
 Brand : Innodisk
 Applicant : Innodisk Corporation
 Address : 9F, No. 100, Sec. 1 Xintai 5th Rd., Xizhi City, Taipei 221, Taiwan

We, International Standards Laboratory, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified. (refer to Test Report if any modifications were made for compliance).



Standards:

FCC CFR Title 47 Part 15 Subpart B: 2010- Section 15.107 and 15.109
 ANSI C63.4-2009
 Industry Canada Interference-Causing Equipment Standard ICES-003 Issue 5: 2012

Class B

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

International Standards Laboratory

Jim Chu
 Jim Chu / Director

☒ Lung-Tan LAB:
 No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.
 Lung-Tan Hsiang, Tao Yuan County 325, Taiwan
 Tel: 886-3-407-1718; Fax: 886-3407-1738

