



Introduction

ORing's Transporter™ series un-managed Ethernet switches are designed for industrial applications, such as rolling stock, vehicle, and railway applications. The **TGXPS-1080-M12-MV** is an un-managed PoE Ethernet switch with 8x10/100/500/1000Base-T(X) P.S.E. which is specifically designed for the toughest and fully compliant with EN50155 requirement. **TGXPS-1080-M12-MV** also supports Power over Ethernet, a system to transmit electrical power, along with data, to remote devices over standard twisted-pair cable in an Ethernet network. Each **TGXPS-1080-M12-MV** switch has 8X10/100/500/1000Base-T(X) IEEE 802.3af/at P.S.E. (Power Sourcing Equipment) ports, but the PoE total power budget is 60Watts Max. P.S.E. is a device (switch or hub for instance) that will provide power in a PoE setup. **TGXPS-1080-M12-MV** EN50155 Ethernet switch use M12 connectors to ensure tight, robust connections, and guarantee reliable operation against environmental disturbances, such as vibration and shock. In addition, the wide operating temperature range from -40 °C to 75°C can satisfy most of operating environment. Therefore, the switch is one of the most reliable choices for rolling stock and highly-managed PoE Ethernet application. While installing in the train, **TGXPS-1080-M12-MV** is mainly used for in-train monitoring and Entertainment service due to its high-speed Gigabit Ethernet connection and PoE capability. Devices connected will be IP camera or CCTV for the use of train surveillance. As an unmanaged Ethernet Switch, **TGXPS-1080-M12-MV** is not able and will not be used for any control related application. Its main function is simply forwarding the Ethernet packet from one Ethernet based device to another Ethernet device which are all connected to the Switch.

Package Contents





The device is shipped with the following items. If any of these items is missing or damaged, please contact your customer service representative for assistance.

Contents	Pictures	Number
TGXPS-1080-M12-MV or TGXPS-1080-M12-BP2-MV		1
QIG		1


Preparation

Before you begin installing the switch, make sure you have all of the package contents available.

Safety & Warnings


-  **Elevated Operating Ambient:** If installed in a closed environment, make sure the operating ambient temperature is compatible with the maximum ambient temperature (T_{ma}) specified by the manufacturer.
-  **Reduced Air Flow:** Make sure the amount of air flow required for safe operation of the equipment is not compromised during installation.
-  **Mechanical Loading:** Make sure the mounting of the equipment is not in a hazardous condition due to uneven mechanical loading.
-  **Circuit Overloading:** Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading of the circuits might have on overcurrent protection and supply wiring. Appropriate consideration of equipment nameplate ratings should be used when

Dimension Unit =mm (Tolerance ±0.5mm)

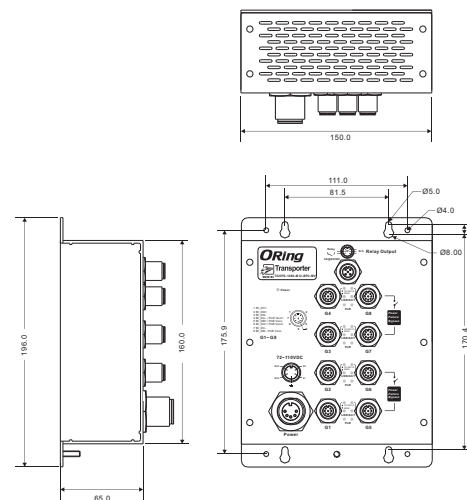

Panel Layouts

Front View

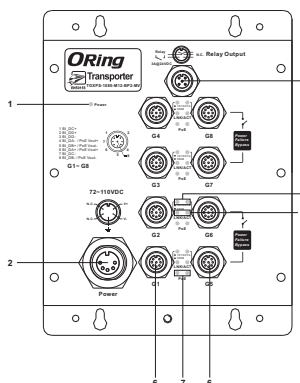


1. Power status LED
2. Power input port
3. Relay output port
4. LNK/ACT & Speed LED for Gigabit ports (1Gbps/10Mbps/100Mbps)
5. LNK/ACT & Speed LED for Gigabit ports (500Mbps)
6. Gigabit Ethernet ports (G5-G8 of TGXPS-1080-M12-BP2-MV are bypass ports)
7. PoE status LED

Installation

Wall-mount

The device can be fixed to the wall. Follow the steps below to install the device on the wall.
Step 1: Hold the device upright against the wall
Step 2: Insert four screws through the large opening of the keyhole-shaped apertures at the top and bottom of the unit and fasten the screw to the wall with a screwdriver.
Step 3: Slide the device downwards and tighten the four screws for added stability.



Instead of screwing the screws in all the way, it is advised to leave a space of about 2mm to allow room for sliding the switch between the wall and the screws.

Wiring

For pin assignments of power and relay output ports, please refer to the following tables.

Grounding

Grounding and wire routing help limit the effects of noise due to electromagnetic interference (EMI). Run the ground connection from the grounding pin on the power connector to the grounding surface prior to connecting devices.

Power port pinouts

The device supports one set of power supplies and uses the 7/8 inch M23 5-pin male connector on the front panel for the power input.
Step 1: Insert a power cable to the power connector on the device.
Step 2: Rotate the outer ring of the cable connector until a snug fit is achieved. Make sure the connection is tight.



Relay output port pinouts

The switch uses the M12 A-coded 5-pin female connector on the front panel for relay output. Use a power cord with an M12 A-coded 5-pin male connector to connect the relay. The relay contacts will detect power off event to trigger warning system.



Network Connection

The device provides Ethernet ports in M12 connector type. According to the link type, the switch uses CAT 3, 4, 5, 5e UTP cables to connect to any other network devices (PCs, servers, switches, routers, or hubs). Please refer to the following table for cable specifications.

Cable	Type	Max. Length	Connector
10BASE-T	Cat. 3, 4, 5 100-ohm	UTP 100 m (328 ft)	M12 A-coding connector
100BASE-TX	Cat. 5 100-ohm UTP	UTP 100 m (328 ft)	M12 A-coding connector
1000BASE-T	Cat. 5/Cat. 5e 100-ohm UTP	UTP 100 m (328ft)	M12 A-coding connector

For pin assignments of the LAN ports, please refer to the following tables.



10/100/1000Base-T(X) M12 port	
PIN	Definition
1	BI_DC+
2	BI_DD+
3	BI_DD-
4	BI_DA- / PoE Vout+
5	BI_DB+ / PoE Vout-
6	BI_DA+ / PoE Vout+
7	BI_DC-
8	BI_DB- / PoE Vout-

Quick Installation Guide

TGXPS-1080-M12-MV Series

EN50155 8-port unmanaged
Gigabit PoE Ethernet switch

Configurations

After installing the switch and connecting cables, start the device by turning on power. The green power LED should turn on. Please refer to the following tablet for LED indication.

LED	Color	Status	Description
PWR	Green	On	Power is enabled
10/100/500/1000Base-T(X) Ethernet ports			
10/100/1G	Green	On	Port is running at 1Gbps
	Amber	On	Port is running at 10/100 Mbps
500M	Amber	On	Port is running at 500Mbps
PoE	Blue	On	PoE power is enabled

Specifications

ORing Switch Model	TGXPS-1080-M12-MV	TGXPS-1080-M12-BP2-MV
Physical Ports		
10/100/500/1000Base-T(X) Ports in M12 With P.S.E.	8 x M12 female connector (8 pin A-coding)	8 x M12 female connector (8-pin A-coding, bypass function included on port5~8)
Technology		
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow control IEEE 802.3af compliant PoE specification (Maximum 15.4Watts per port) IEEE 802.3at compliant PoE specification (Maximum 30Watts per port)	
MAC Table	4K MAC addresses	
Processing	Store-and-Forward	
LED Indicators		
Power Indicator	Green : Power LED x 1	
10/100/500/1000Base-T(X) M12 port indicator and PoE indicator	Top for 10/100/1000Mbps port Link/Act indicator. Green for 1Gbps link, Amber for 10/100 Mbps link Middle Amber for 500Mbps port Link/Act indicator Bottom blue for PoE Injected indicator	
Fault Contact		
Relay	Relay output to carry capacity of 3A at 24VDC on M12 female connector (5-pin M12 A-coding)	
Power		
Input power	72/96/110VDC (50.4-154VDC). 7/8 inch 5-pin male connector	
Power Consumption(Typ.)	72VDC@9Watts Max. (power consumption of P.S.E. is not included) 110VDC@12Watts Max. (power consumption of P.S.E. is not included)	
PoE Output Total Power Budget	60 Watts	
Overload Current Protection	Present	
Reverse Polarity Protection	Present	
Physical Characteristic		
Enclosure	IP-30	
Dimension (W x D x H)	150(W) x 65(D) x 196(H) mm (5.90 x 2.56 x 7.66 inch.)	
Weight (g)	1320 g	1350 g
Environmental		
Storage Temperature	-40 to 85°C (-40 to 185°F)	
Operating Temperature	-40 to 75°C (-40 to 167°F)	
Operating Humidity	5% to 95% Non-condensing	
Regulatory Approvals		

EMC	CE EMC (EN 55024, EN 55032), FCC Part 15B, EN 50155(EN 50121-1, EN 50121-3-2)	
EMI	EN 55032, CISPR32, EN 61000-3-2, EN 61000-3-3, FCC Part 15B class A	
EMS	EN 55024 (IEC/EN 61000-4-2 (ESD), IEC/EN 61000-4-3 (RS), IEC/EN 61000-4-4 (EFT), IEC/EN 61000-4-5 (Surge), IEC/EN 61000-4-6 (CS), IEC/EN 61000-4-8(PFMF), IEC/EN 61000-4-11 (DIP))	
Shock	IEC60068-2-27	
Free Fall	IEC60068-2-31	
Vibration	IEC60068-2-6	
Safety	EN 60950-1	
Other	EN 50155 (IEC 61373)	
MTBF	229942.9636 hrs	172181.8534 hrs
Warranty	5 years	

ORing

Copyright© 2019 ORing
All rights reserved.

ORing Industrial Networking Corp.
 TEL: +886-2-2218-1066 Website: www.oringnet.com
 FAX: +886-2-2218-1014 E-mail: support@oringnet.com