


# CA331-NR

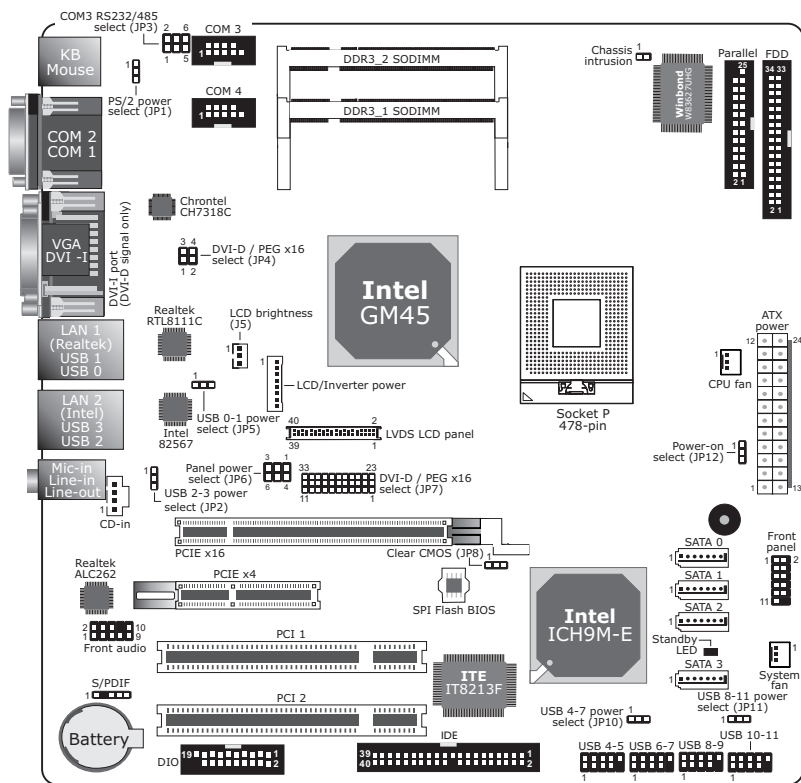

| Power-on Select                     | JP12   |
|-------------------------------------|--------|
| Power-on via power button (default) | 1-2 On |
| Power-on via AC power               | 2-3 On |

| Clear CMOS Data  | JP8    |
|------------------|--------|
| Normal (default) | 1-2 On |
| Clear CMOS Data  | 2-3 On |

| USB Power: 0-1(JP5), 2-3(JP2), 4-7(JP10), 8-11(JP11) |        |
|------------------------------------------------------|--------|
| 5V (default)                                         | 1-2 On |
| 5V_standby                                           | 2-3 On |

| PS/2 Power   | JP1    |
|--------------|--------|
| 5V (default) | 1-2 On |
| 5V_standby   | 2-3 On |

| COM 3 RS232/RS485 Select | JP3    |
|--------------------------|--------|
| RS232 (default)          | 1-2 On |
| RS485 Half Duplex        | 5-6 On |

| LCD Brightness Control (Voltage Level Adjust) | J5     |
|-----------------------------------------------|--------|
| Increases the voltage level                   | 1-2 On |
| Decreases the voltage level                   | 2-3 On |

| Panel Power Select | JP6    |
|--------------------|--------|
| +12V               | 1-4 On |
| +5V                | 2-5 On |
| +3.3V (default)    | 3-6 On |

Note: Increasing or decreasing the voltage to control the LCD panel's brightness varies among Inverters. You must refer to the Inverter's specification to make the appropriate adjustment to the brightness of the LCD panel.

| DVI-D / PEG x16 Select                                                               | JP4    | JP7      |
|--------------------------------------------------------------------------------------|--------|----------|
| Onboard DVI-D enabled. (default)                                                     | 1-2 On | 23-33 On |
| PEG x16 slot enabled (PCIe x16/x8/x4/x1, ADD2 card) (onboard DVI-D will be disabled) | 1-2 On | 1-11 On  |