



IPC PSU FSP500-701UH

DESCRIPTION

FSP500-701UH is an industrial level of switching power supply. The power supply comes to offer the total power capacity up to 500 Watts, and uses unique active PFC (Power Factor Correction) circuit design with its high-load electrical components, makes it to be perfectly used in an industrial environment. In addition, with its full range of input and output electrical features, the power supply is ideally the best choice for server, workstation, communication or any other automation applications to use. The product also complies with the latest safety and EMC standards, which is perfectly to meet various regulations worldwide.

APPLICATION

For standard, advanced server, NAS, storage, and industrial power system.

FEATURES

- 85 Plus Bronze
- Low Ripple & Noise
- Output over voltage protection
- Short circuit protection on all outputs
- Resettable power shut down
- INTERNAL 4 cm fan
- 100% burn-in under high ambient temperature(50°C)
- Vacuum-impregnated transformer
- MTBF:100K hours at 25°C
- 100% Hi-pot tested
- Line input fuse protection

WATTAGE

Wattage: 500W

DIMENSION

Dimension: 220mm(L) x 100mm(W) x 40.5mm(H)

PRODUCT HIGHLIGHT

Efficiency Level: 80 Plus Bronze
Altitude: 5000M

INPUT SPECIFICATION

Input Range: 90-264 Vac
Input Frequency: 47-63 Hz
Input Current: 115V@ 8.0 Amps-rms maximum
230V@ 4.0 Amps-rms maximum

GENERAL SPECIFICATION

Efficiency: 85% 230VAC
Voltage: +3.3V, +12V, +5V, +5SB: $\pm 5\%$
Regulation: -12V: $\pm 10\%$


*Output Voltage and Current Rating

	+3.3V	+5V	+12V1	+12V2	+12V3	-12V	+5Vsb
Ripple-Noise(R-P) mV	50mV	50mV	120mV	120mV	120mV	120mV	50mV
Regulation Load %	$\pm 5\%$	$\pm 5\%$	$\pm 5\%$	$\pm 5\%$	$\pm 5\%$	$\pm 10\%$	$\pm 5\%$
Output Max.(A)	20A	20A	16A	16A	16A	0.5A	3A
Output Min.(A)	0.5A	1A	0.5A	1A	1A	0A	0A

NOTES

- 5V, 3.3V, 12V, -12V Will have the regulation to 10% when all load take off.
- The 12V1 and 12V2 and 12V3 total output shall not exceed 39A
- The +3.3V and +5V total output shall not exceed 130 watts.
- The total output shall not exceed 500 watts

MECHANICAL SPECIFICATION

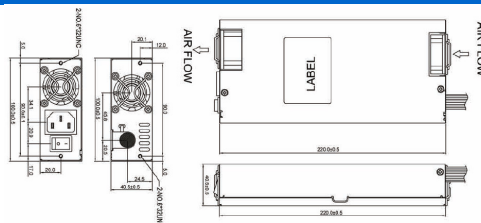

This content is subject to change, please refer to specification for more detail.
FSP reserve the right to change the content without prior notice



SAFETY STANDARD APPAOVAL



OUTPUT SPECIFICATION

Hold up Time: 115V/60Hz 16mSec.
Minimum@100% Load,
230V/50Hz 16mSec.
Minimum,@100% Load
+3.3Vdc output : +3.5 Vdc
minimum, + 4.5Vdc
maximum
+5Vdc output : +5.5 Vdc
minimum, + 6.82Vdc
maximum
+12Vdc output : +13.4 Vdc
minimum, + 15.6Vdc
maximum
Output Rise Time: 115V-rms/230V-rms 5V
20ms Maximum
115V-rms/230V-rms 12V
20ms Maximum
Ripple & Noise: 3.3V:50mV p-p
5V:50mV p-p
12V1:120mV p-p
12V2:120mV p-p
12V3:120mV p-p
-12V:120mV p-p
5Vsb:50mV p-p

ENVIRONMENTAL SPECIFICATION

TEMP.Range: Storage Temperature: -
20°C to + 80°C
MTBF: The power supply have a
minimum predicted
MTBF(MIL-HDBK-217) of
100,000 hours of continuous
operation at 25°C,
maximum-output load, and
nominal AC inout voltage