

Datasheet

M.2 (P42) 3IE2 series

- PCIe Gen. III x2, NVMe 1.3
- Excellent data transfer speed
- Zero mechanical interference
- LDPC ECC engine supported.
- End-to-end Data Path Protection



Introduction

Innodisk M.2 (P42) 3IE2 is an NVM Express DRAM-less SSD designed as the standard M.2 form factor with PCIe interface and MLC NAND Flash. M.2 (P42)3IE2 supports PCIe Gen III x2, and it is compliant with NVMe 1.3 providing excellent performance. Moreover, it adopts iSLC technology providing high endurance and reliability. With sophisticated error detection and correction (ECC) functions, the module can ensure full End-to-end Data Path Protection that secures the data transmission between host system and NAND Flash.

Innodisk M.2 (P42) 3IE2 is integrated with Marvell controller which provide both low power consumption and efficient heat dissipation, making the SSD optimal for space-constrained IPCs and server boot-up applications. Innodisk M.2 (P42) 3IE2 is integrated with Marvell controller which provide both low power consumption and efficient heat dissipation, making the SSD optimal for space-

M.2 (P42) 3IE2 series

Diagram

Contact us for more information
about the M2 (P42) 3IE2.

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Headquarters (Taiwan)


5F., No. 237, Sec. 1, Datong Rd., Xizhi
Dist., New Taipei City 221, Taiwan
Tel: +886-2-7703-3000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-40-3045-400
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2019 Innodisk Corporation.
All right reserved. Specifications are
subject to change without
prior notice.

20190625

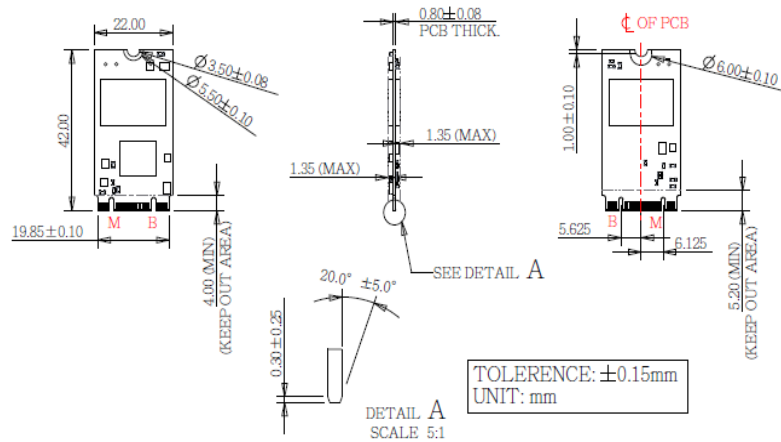

Specifications

Interface	PCIe Gen. III x2
Flash Type	iSLC
P/E cycle	20,000
Capacity	16GB~128GB
Max. Channels	4
Sequential R/W (MB/sec, max.)	1350/680
Max. Power Consumption	2.62W(3.3Vx792mA)
Thermal Sensor	✓
External DRAM buffer	-
H/W Write Protect	-
Dimension (WxLxH)	22.0 X 42.0 X 3.5 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3,000,000

Ordering Information

Operation Temp.	16GB	32GB	64GB	128GB
Standard Grade (0°C ~ +70°C)	DHM24- 16GM61BCADC	DHM24- 32GM61BCAQ	DHM24- 64GM61BCAQ	DHM24- A28M61BCAQ
Industrial Grade (-40°C ~ +85°C)	DHM24- 16GM61BWADC	DHM24- 32GM61BWAQ	DHM24- 64GM61BWAQ	DHM24- A28M61BWAQ