


MS-9818

3.5" SBC with Intel® Celeron® Processor N3000/N3150 for High-Performance, Low-Power & Fanless Solution

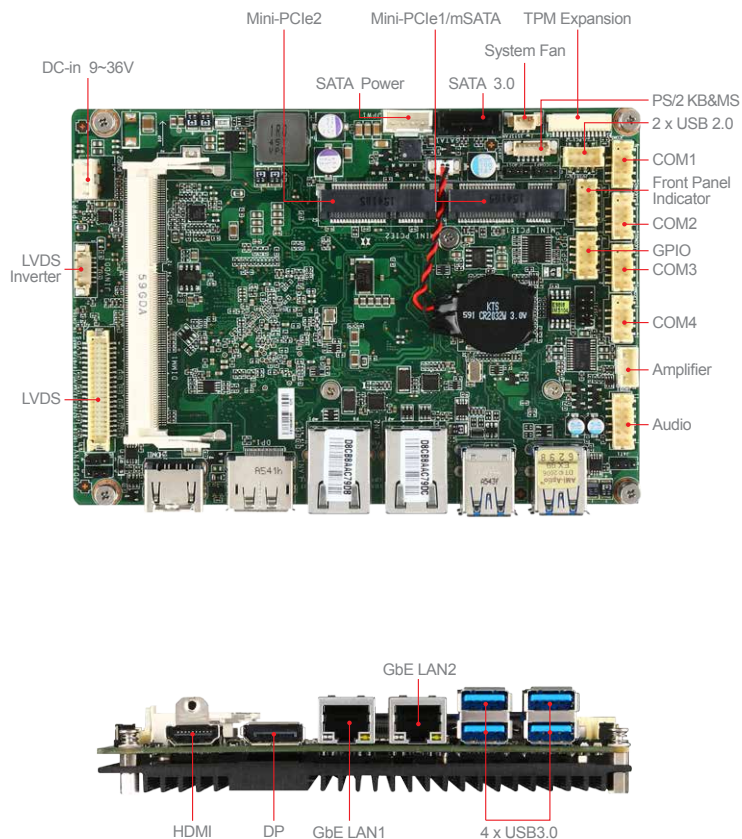

Features

- Intel® Braswell N3000 Series SoC
- Supports DDR3L 1333/1600 MHz SO-DIMM memory up to 8GB
- 3 independent displays with HDMI, DP, and LVDS outputs
- 4 USB 3.0, 2 USB 2.0, and 4 COM ports
- Dual Mini-PCIe, SATA, mSATA, and Dual GbE LAN
- Supports DC-in 9~36V

Ordering Information

Part Number	Description
919-9818-003	MS-9818 10 OPTB, 3.5-INCH, INTEL CELERON N3160, 1*DDR3L SO-DIMM, DP, HDMI, LVDS, 2*MINI-PCIE, 2*LAN, 1*SATA3.0, 1*MSATA, 6*USB (4*USB 3.0+2*USB 2.0), 4*COM, DC-IN 9~36V
919-9818-004	MS-9818 10 OPTC, 3.5-INCH, INTEL CELERON N3010, 1*DDR3L SO-DIMM, DP, HDMI, LVDS, 2*MINI-PCIE, 2*LAN, 1*SATA3.0, 1*MSATA, 6*USB(4*USB 3.0+2*USB 2.0), 4*COM, DC-IN 9~36V

Packing List

Part Number	Description
K10-3002145-V03	DC LOCKABLE CABLE, 120mm
K1B-3008034-V03	USB2.0 CABLE, 150mm
K14-1009062-V03	INT COM PORT CABLE, 250mm
K1D-1012064-V03	SATA Power CABLE, 200mm
G71-SEDC152-N56 / X03	DRIVER CD

Specifications

Processor	CPU	Intel® Celeron® Processor N3150, QC, 6W Intel® Celeron® Processor N3000, DC, 4W
	Frequency	N3150, 1.6 GHz, up to 2.08 GHz N3000, 1.04 GHz, up to 2.08 GHz
	L2 Cache	2MB
	CPU Type	BGA
	Chipset	Integrated in SoC
Memory	BIOS	AMI
	Technology	Single-channel DDR3L 1600MHz
	Max. Capacity	Up to 8 GB
Display	Socket	1 x 204-pin SO-DIMM
	Controller	Intel® HD Graphics
	Graphic Memory	Shared system memory up to 1.7 GB SDRAM
	LVDS	Dual Channel 18/24-bit
Display	HDMI	1
	DisplayPort	1
	Multiple Display	3 independent displays
	Display Interface	LVDS up to 1920 x 1200 @ 60 Hz, HDMI up to 2560 x 1600 @ 60 Hz, 3840 x 2160 @ 30 Hz DP1.1a up to 2560 x 1600 @ 60 Hz, 3840 x 2160 @ 30 Hz
Ethernet	Controller	2 x Realtek RTL8111G GbE LAN
Audio	Controller	Realtek® ALC887-VD2-CG HD Audio Codec
Super I/O	Controller	Fintek F81866AD-I
H/W Monitor	Watchdog Timer	256-level Watchdog Timer
	Smart Fan	Yes
TPM	Controller	Pin header
I/O Interface	USB	2 x USB 2.0 (2 x internal) 4 x USB 3.0 (4 x rear)
	Serial	4 x COM (internal) COM1: RS-232/422/485, 0V/5V/12V COM2~4: RS-232
	PS/2	1 (box header)
	GPIO	8-bits (4 x GPI; 4 x GPO)
Expansion Slot	Mini-PCIe	2 x Full-size (one w/ mSATA)
Storage	SATA	1 x SATA 3.0
	mSATA	1 (Shared with Mini-PCIe1)
Power Supply	DC	DC-in 9~36V
	ATX	N/A
Environment	Operating Temperature	-10 ~ 60°C
	Operating Humidity	10 ~ 90%, non-condensing
	Storage Temperature	-20 ~ 80°C
	Storage Humidity	10 ~ 90%, non-condensing
Form Factor	Dimensions	146mm x 102mm (3.5")
	Weight	0.33 kg
Certification	EMC	FCC, CE, RCM, VCCI, BSMI
Software Platform	OS Support	Windows 7 (32/64-bit) Windows 8.1 (64-bit) Windows 10 (64-bit) Fedora 21 Ubuntu 14.04.03