


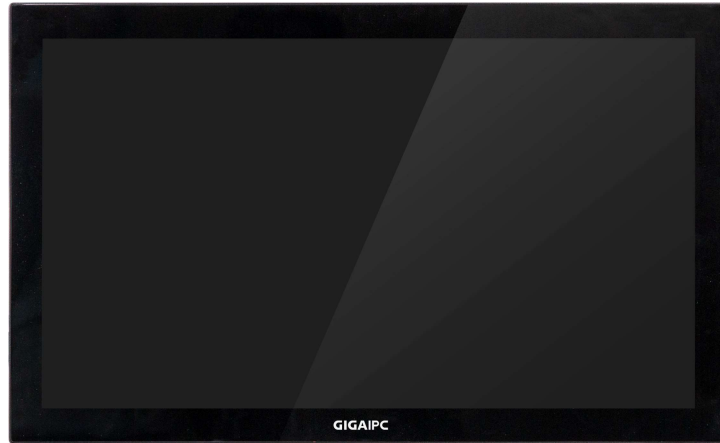

QBiX-PPC215A610HT-A1

21.5" Industrial Panel PC system with Mini-ITX Intel® H610 Chipset Motherboard, support 13th/12th Generation Intel® Core™ Processors

Key Features

- 21.5" Industrial Panel PC system
- 10 points, Projected capacitive touch screen
- Intel® H610 Express Chipset
- Dual Channel DDR4, 2 x SO-DIMMs
- Support VESA mount 100 x 100mm

Application

- Factory Automation
- Industrial PC

SPECIFICATION

Specification

Dimension	524.8W x 61.8D x 320.8H (mm)
Motherboard	mITX-H610A
LCD	Display Type : 21.5" TFT LCD panel Resolution : 1920 x 1080 Brightness : 250 cd/m ² View angel : 160°/178° (H), 160°/178° (V) Contrast Ratio : 3000:1 Response time : 25 ms Backlight lifetime : 40,000 hrs
Touch screen	Type : 10 points, projected capacitive Viewing Area : 477.64L x 269.11W Active Area : 476.06L x 267.79W Surface Hardness : >=3H Transparency : >85%
CPU	Support for 13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors in the LGA1700 package TDP under 65W
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB Support Dual channel DDR4 3200 MHz memory modules
Ethernet	1 x GbE LAN Port (Intel® I219V) 1 x 2.5GbE LAN Port (Intel® I226V)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x4) 1 x 2230 M.2 E-Key (WiFi/BT)
I/O	2 x Audio Jacks (Line out, Mic in) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x COM Ports (RS-232) 1 x 3-pin Terminal Block 1 x HDMI 1 x Display Port 1 x VGA 1 x GPIO (8 bits) 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 2 x USB 2.0 1 x Power button with LED
Storage	2 x 2.5" HDD/SSD
Speaker	2 x 2W speaker
Power	+12V/+19V~+24VDC
Order Information	TBD