W07IE3S-GCO1HB

7" Intel® Celeron® N6211 G-WIN GC-Series Front IP65 PCAP Panel PC



KEY FEATURES

- 7" 1024 x 600 with P-CAP touchscreen
- Low power consumption with Intel® Celeron® Elkhart Lake N6211
- Fanless cooling system and ultra low power consumption
- Front IP65 for protection against water and dust
- A true flat, easy-to-clean front surface with edge-to-edge design
- Plenty of I/O, including 2 x LAN, 1 x COM, 2 x USB 3.2 Gen 2 x1, 1 x HDMI



SPECIFICATIONS

Display

| Display | | | |
|------------------------|---|--------------------------|---|
| Resolution | 1024x600 | Size | 7.0 inches |
| Contrast Ratio | 700:1 | Panel Brightness | 1000.0 nits |
| View Angles | 75,75,75,70 | Active Area | 153.6x90 mm |
| Touch / Glass | Projected Capacitive Multi Touch Screen | | |
| System Specification | | | |
| Processor | Intel® Celeron® N6211 (up to 3.0GHz) Intel® Celeron® N6210 (up to 2.6GHz) (Optional) | Memory | 1 x SO-DIMM, DDR4 3200 MHz, 4GB 8GB (Optional) 16GB (Optional) |
| Storage | 1 x M.2 2242 B-key SSD 128GB 256GB (Optional) 512GB 1 x SATA III for 2.5" SSD/HDD up to 1TB (Optional) | Ethernet controller | 2 x Intel® Ethernet Controller |
| Security | TPM 2.0 | Operating System | Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 22.04 (Optional) |
| Environment | | | |
| Operating Humidity | 10% to 90% (Non-Condensing) | Operating Temperature | 0~50°C |
| Storage Temperature | -20°C~60°C | Shock | MIL-STD-810G Method 516.6 |
| Vibration | MIL-STD-810G Method 514.6 | IP rating | Front IP65 |
| Certification | | | |
| Certification | CE, FCC | | |
| IO Ports | | | |
| USB Port | 2 x USB3.2 Gen2 x 1 (Type-A) | Serial Port | 1 x RS232(Default)/422/485 |
| Video | 1 x HDMI 2.0 (Optional) | Audio | 1 x Speaker |
| LAN | 2 x Giga LAN RJ45 Connector | | |
| Mechanical | | | |
| Dimension | 189.4 x 145.4 x 39.5 mm | Mounting | VESA Mount/ Panel Mount |
| Enclosure | Metal Housing with Aluminum Bezel | Cooling System | Fanless Design |
| | | | |

Accessory User Manual(Hardcopy)

AC Adapter Power Cable

Power Rating 12V DC in


Control

Button 1 x Power Button

1 x Reset Button

DIMENSIONS

UNIT:MM

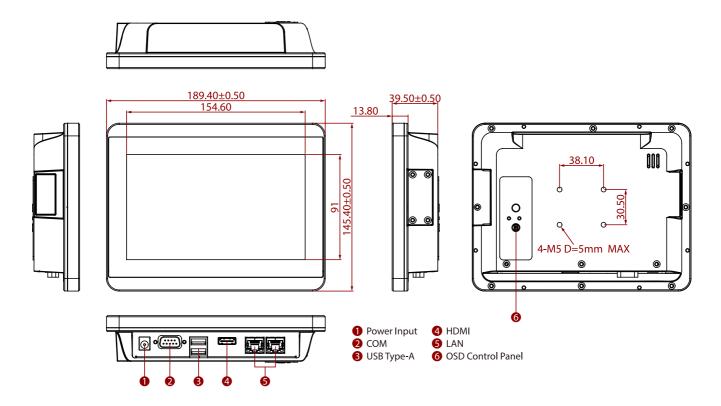

NOTE

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. Please contact our sales representative if you need further product information.
- 3. All specifications are subject to change without prior notice.
- 4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.