

Data Sheet Fujitsu Mainboard D3220-B µATX

Classic Desktop Series



Powered by the Intel® B85 Express Chipset supporting DDR3 1600 SDRAM Memory and 4^{th} generation Intel® Core TM i3 / i5 / i7 Processors (Socket LGA1150)

Chipset:

Intel® B85 Express Chipset

Processors:


Intel® Core™ i7 – 4xxx processor series Intel® Core™ i5 – 4xxx processor series Intel® Core™ i3 – future gen4 processor series Intel® Pentium® – future Haswell processor series Intel® Celeron® – future Haswell processor series

Memory:

DDR3 1333/1600 SDRAM

Product Features:

Intel® HD Graphics (e.g. HD4600) PCI Express Gen3 Multichannel Audio & Intel GbE LAN onboard USB 2.0 and USB 3.0 onboard Second Display Port optional via specific PCIe card

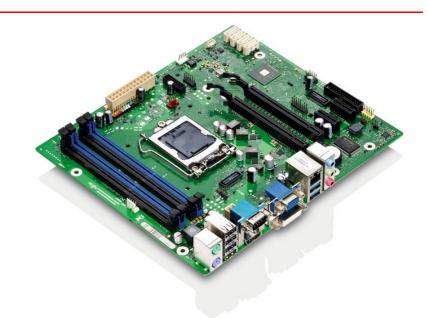























0





Socket LGA1150



USB 2.0

PCle x16 Gen2 (4 lanes)



0

4 x SATA-600

B85-PCH

USB 2.0



Features and benefits

Board Size reduced µATX: 9.6" x 8.4" (243.8 x 213.4 mm)

Chipset Intel® B85 Express Chipset

Memory

4 DIMM Sockets (1.5V), 1GB - 32GB, Single Channel / Dual Channel DDR3-1333 (CL9) and DDR3-1600 (CL11) SDRAM, unbuffered, no ECC

Processor

Intel® Core™ i7 – 4xxx processor series Intel® Core™ i5 – 4xxx processor series Intel® Core™ i3 – future gen4 processor series Intel® Pentium® - future Haswell processor series

Intel® Celeron® - future Haswell processor series

Socket LGA1150, max. 95W TDP

(For details on supported processors please refer to our website)

Power Specification

ATX- 24 Pin or ATX- 20 Pin Power Supply required

Support for Soft-Off Power Supplies

3.3V Auxiliary Supply Voltage on PCle Slots (Wake-Up Function)

On board CPU Core Voltage Regulator

Power Supply Requirements

for onboard components (worst case incl. processor, memory, USB devices; w/o PCIe cards, w/o SATA drives)

Source	Voltage	Min. PS Load	Max.Voltage Tolerance	Mainboard Capacitive Load	Max. Mainboard Current
	+ 12V	0.05A	± 5 %	10.000μF	14A/18A ¹⁾
Main Power	- 12V	OA	± 10 %	500µF	0.3A
Supply	+ 5V	0.2A	± 5 %	10.000µF	10A
	+ 3.3V	OA	± 5 %	6.000µF	2A
Aux. Power	+ 5Vaux	OA	+5 % / -3%	7.000µF	2.5A

1) 18A = Surge Current for 20 sec!

BIOS

AMI Aptio 4.x (UEFI) BIOS

modified and adapted by Fujitsu Technology Solutions; Recovery BIOS, SM-BIOS (DMI), BIOS and CPU Microcode Update, Quick Boot, Logo Boot, Quiet Boot, Plug & Play, Automatic DRAM and PCI Configuration, BIOS Support for S.M.A.R.T., Advanced Power Management, ACPI S3/S4, Wake on time from S5

Security Features

Recovery BIOS, System and BIOS Password, Boot Sequence Control, Serial/Parallel/USB- Port Access Protection, Boot Sector Virus Warning, Write Protection for Flash BIOS, EraseDisk (optional BIOS Feature)

Special Features

Silent Fan LT Independent temperature related processor fan and

system fan supervision

System Guard View Silent Fan LT features

Silent Drives Noise reduction for optical and hard disk drives

Recovery BIOS Restores a corrupted BIOS

Desk Update Simple driver update with Driver&Utilities DVD

Multi Boot Comfortable boot from any boot device **HDD Password** Access protection for disk drives

External Connectors

Mouse 4x USB COM VGA LAN Kbd DisplayPort DVI-D 2x USB 3.0 Audio Graphics

Intel® HD Graphics (e.g. HD4600, depends on installed processor), DX11.1

Audio

Realtek ALC671, 5.1-channel, High Definition Audio Codec

Intel Clarkville i217LV with 10/100/1000 MBit/s,

Wake-on-LAN (WoL) by interesting Packets, Link Status Change and Magic Packet™, PXE Support, BIOS MAC Address Display

4 Serial ATA III 600 Interface (up to 6GBit/s),

NCQ, AHCI

Features	D3220-B
Chipset	iB85
Board Size	reduced µATX
VGA / DVI-I / DVI-D / DisplayPort V1.2 / LVDS	ü/-/ü/ü/-
Stereo Audio / 5.1 Multichannel Audio	- / ü
Buzzer / int. Speaker Support	ü/ü
LAN Gbit / 100 Mbit / 10 Mbit	ü/ü/ü
LAN ASF / DASH V1.1 / WoL / Boot / iAMT	- / - / ü / ü/ -
SATA / ATA / RAID / eSATA-support	ü/-/-/ü
FireWire™ / USB 2.0 / USB 3.0	- / ü / ü
FAN monitored PSU 1) / CPU / AUX1 / AUX2	-/ü/ü/-
FAN controlled PSU 1) / CPU / AUX1 / AUX2	-/ü/ü/-
TEMP monitored CPU / onboard sensors / external sensor	ü/ü/-
Special Features	
Silent Fan / Silent Fan LT / System Guard / Silent Drives	-/ü/ü/ü
Recovery BIOS / Desk Update / Multi Boot	ü/ü/ü
HDD Password / HDD Encryption / EraseDisk 4) / TPM	ü/-/ü/-
BIOS POST Watchdog / BIOS Boot Watchdog / OS HW Watchdog	-/-/-
Logo Boot Option / Intel On Screen Branding	ü/ü
High Efficiency Core Voltage Regulator Design	ü
Operating Mode 24-7 / 8-5 (hrs per day - days per week)	- / ü
Mainboard operating temperature range (chassis inside)	10°C − 45°C
Internal Connectors	
DIMM Sockets (DDR3-1600)	4
PCI Express x16 Slot (Gen3) / PCI Express x16 Slot (Gen2)	1 / -
PCI Express x16 Slot (4 Lanes, Gen2) / x1 Slot (Gen2)	1/2
PCI Slots (32Bit, 33 MHz, Rev. 2.3)	-
SATA-600 / SATA-300 / ATA / Floppy	4/0/0/0
S/PDIF (digital Audio) OUT / IN	-/-
Frontpanel Audio (9-Pin, HD Audio)	1
USB 2.0 channels / USB 3.0 channels / USB Stick (2.0)	4 / 2 / -
Serial (FIFO, 16550 compatible)	-
FAN PSU ¹⁾ / CPU / AUX1 / AUX2	-/1/1/-
SMBus (Case Temperature)	-
Intrusion (Case Open)	-
Parallel (EPP/ECP) Pin Connector 2)	1
ATX Power Supply (24 pin + 4 pin) / 12V-only PowerSupply	ü/-
External Connectors	
VGA Sub D / DVI-I / DVI-D / DisplayPort V1.2 3)	1/-/1/1
Audio Mic. In / Line in / Line out (or driver configuration)	1/1/1
S/PDIF (digital Audio) OUT / IN	- / -
LAN (RJ-45)	1
PS/2 Mouse / Keyboard	1/1
USB 2.0 / USB 3.0	4/2
Serial (RS232, FIFO, 16550 compatible)	1
Parallel (EPP/ECP) 2)	-

- Not supported by standard Power Supplies
- External parallel port possible via optional connector cable Second Display Port possible via PCIe x4-Adapter D3213 Optional BIOS Feature

More information

Fujitsu platform solutions

In addition to Fujitsu Mainboards Fujitsu provides a range of platform solutions. They combine reliable Fujitsu products with the best in services, know-how and worldwide partnerships.

Dynamic Infrastructures

With the Fujitsu Dynamic Infrastructures approach, Fujitsu offers a full portfolio of IT products, solutions and services, ranging from clients to datacenter solutions, Managed Infrastructure and Infrastructure-as-a-Service. How much you benefit from Fujitsu technologies and services depends on the level of cooperation you choose. This takes IT flexibility and efficiency to the next level.

Computing products

www.fujitsu.com/global/services/computing

- PRIMERGY: Industrial standard server
- SPARC Enterprise: UNIX server
- PRIMEQUEST: Mission-critical IA server
- ETERNUS: Storage system

Software

www.fujitsu.com/software/

- Interstage: Application infrastructure software
- Systemwalker: System management software

More information

Learn more about Fujitsu Mainboards, please contact your Fujitsu sales representative, Fujitsu business partner, or visit our website. http://ts.fujitsu.com/

Fujitsu green policy innovation

Fujitsu Green Policy Innovation is our worldwide project for reducing burdens on the environment. Using our global know-how, we aim to resolve issues of environmental energy efficiency through IT. Please find further information at: www.fujitsu.com/global/about/environment



Copyright

Copyright © Fujitsu Technology Solutions All rights reserved, including intellectual property rights. Changes to technical data reserved. Delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded.

Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.

For further information see http://ts.fujitsu.com/terms_of_use.html

Disclaimer

Technical data are subject to modification and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.

Contact

FUJITSU Technology Solutions OEM Mainboard Sales Email: <u>oem-sales@ts.fujitsu.com</u>

Website: http://ts.fujitsu.com 2013-05-14 CE EN Copyright © Fujitsu Technology Solutions

All rights reserved, including intellectual property rights. Changes to technical data reserved. Delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.

For further information see http://ts.fujitsu.com/terms_of_use.html