

2.5" SATA SSD

3SE Series

Customer:

Customer

Part Number:

Innodisk

Part Number:

Innodisk

Model Name:

Date:

Innodisk Approver	Customer Approver

Table of contents

LIST OF FIGURES 6

1. PRODUCT OVERVIEW 7

1.1 INTRODUCTION OF INNODISK 2.5" SATA SSD 3SE 7

1.2 PRODUCT VIEW AND MODELS 7

1.3 SATA INTERFACE 8

1.4 2.5-INCH FORM FACTOR 8

2. PRODUCT SPECIFICATIONS..... 9

2.1 CAPACITY AND DEVICE PARAMETERS..... 9

2.2 PERFORMANCE 9

2.3 ELECTRICAL SPECIFICATIONS 9

2.3.1 Power Requirement 9

2.3.2 Power Consumption..... 10

2.4 ENVIRONMENTAL SPECIFICATIONS 10

2.4.1 Temperature Ranges 10

2.4.2 Humidity..... 10

2.4.3 Shock and Vibration..... 10

2.4.4 Mean Time between Failures (MTBF) 10

2.5 CE AND FCC COMPATIBILITY 11

2.6 RoHS COMPLIANCE 11

2.7 RELIABILITY..... 11

2.8 TRANSFER MODE 11

2.9 PIN ASSIGNMENT 12

2.10 MECHANICAL DIMENSIONS 13

2.11 ASSEMBLY WEIGHT 13

2.12 SEEK TIME 13

2.13 HOT PLUG..... 14

2.14 NAND FLASH MEMORY 14

3. THEORY OF OPERATION 15

3.1 OVERVIEW 15

3.2 SATA III CONTROLLER 15

3.3 ERROR DETECTION AND CORRECTION..... 15

3.4 WEAR-LEVELING 16

3.5 BAD BLOCKS MANAGEMENT..... 16

3.6 POWER CYCLING 16

3.7 GARBAGE COLLECTION..... 16

3.8 WRITE PROTECT (OPTIONAL) 16

4. INSTALLATION REQUIREMENTS 17

4.1 2.5" SATA SSD 3SE PIN DIRECTIONS 17

4.2 ELECTRICAL CONNECTIONS FOR 2.5" SATA SSD 3SE 17

4.3 FORM FACTOR..... 17

4.4 DEVICE DRIVE 18

5. PART NUMBER RULE 19

6. APPENDIX 20

REVISION HISTORY

Revision	Description	Date
Preliminary	First Released	May, 2013
Rev 1.0	Remove 256GB information	May, 2013
Rev 1.1	Update 256GB information Add power consumption Add CE/FCC	Dec, 2013
Rev 1.2	Modify ME drawing	Jan, 2014
Rev. 1.3	Modify performance and part number	Feb, 2014
Rev. 1.4	Remove "support DDR3" on P.14	Mar, 2014
Rev. 1.5	Add 4GB	July, 2014
Rev. 1.6	Modify typo on product overview	Aug, 2014
Rev. 1.7	Add hardware write protect function	Nov, 2014
Rev. 2.0	Modify TBW based on NAND Flash specifications	Jan., 2015
Rev. 2.1	Add 512GB information	Apr., 2015
Rev 2.2	Update ME drawing	Jul., 2015
Rev 2.3	Update part number rule	Dec., 2015
Rev 2.4	Add 7mm mechanical dimensions	May, 2016
Rev 2.5	Add 2GB information	Feb., 2019
Rev 2.6	Add 24nm 2GB to 8GB performance	Sep., 2020
Rev 2.7	Remove 512GB solution	Jan., 2021
Rev 2.8	Revise User Capacity	Mar., 2024
Rev 2.9	Remove trim information	Oct., 2024
Rev 3.0	Remove EOL product	Nov., 2024

List of Tables

TABLE 1: DEVICE PARAMETERS 9

TABLE 2: PERFORMANCE 9

TABLE 3: INNODisk 2.5" SATA SSD 3SE POWER REQUIREMENT..... 9

TABLE 4: POWER CONSUMPTION 10

TABLE 5: TEMPERATURE RANGE FOR 2.5" SATA SSD 3SE..... 10

TABLE 6: SHOCK/VIBRATION TESTING FOR 2.5" SATA SSD 3SE..... 10

TABLE 7: 2.5" SATA SSD 3SE MTBF 11

TABLE 8: INNODisk 2.5" SATA SSD 3SE PIN ASSIGNMENT 12

List of Figures

FIGURE 1: INNODISK 2.5" SATA SSD 3SE..... 7

FIGURE 2: INNODISK FiD 2.5" SATA SSD 3SE BLOCK DIAGRAM..... 15

FIGURE 3: SIGNAL SEGMENT AND POWER SEGMENT 17

1. Product Overview

1.1 Introduction of Innodisk 2.5" SATA SSD 3SE

Innodisk 2.5" SATA SSD 3SE products provide high capacity flash memory Solid State Drive (SSD) that electrically complies with Serial ATA (SATA) standard. It supports SATA III standard (6.0GHz) with high performance. Innodisk 2.5" SATA SSD 3SE delivers sustain read speeds of up to 490MB/s and sustain write speeds of up to 430 MB/s. It designed with standard 2.5-inch form factor, which can be used in laptop. Innodisk 2.5" SATA SSD 3SE is designed for industrial field. The SSD have good performance, no latency time and small seek time. It effectively reduces the booting time of operation system and the power consumption is less than hard disk drive (HDD). Innodisk 2.5" SATA SSD 3SE can work in harsh environment. The SSD is vibration resistance, and can work in lower or higher temperature than HDD. Innodisk 2.5" SATA SSD 3SE complies with ATA protocol, no additional drives are required, and the SSD can be configured as a boot device or data storage device.

1.2 Product View and Models

Innodisk 2.5" SATA SSD 3SE is available in follow capacities within SLC flash ICs.

[2.5" SATA SSD 3SE 02GB](#)

[2.5" SATA SSD 3SE 04GB](#)



Figure 1: Innodisk 2.5" SATA SSD 3SE

1.3 SATA Interface

Innodisk 2.5" SATA SSD 3SE supports SATA III interface, and compliant with SATA I and SATA II. SATA III interface can work with Serial Attached SCSI (SAS) host system, which is used in server computer. Innodisk 2.5" SATA SSD 3SE is compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps /3.0Gbps/6.0Gbps data rate). SATA connector uses a 7-pin signal segment and a 15-pin power segment.

1.4 2.5-inch Form Factor

The Industry-standard 2.5-inch form factor design with metal material case is easy for installation because 2.5-inch is a popular form factor in industrial field. 2.5-inch is most laptop's hard disk's form factor. Innodisk 2.5" SATA SSD 3SE can easy install in laptop. Innodisk 2.5" SATA SSD 3SE has a compact design 69.85mm (W) x99.85mm (L) x 9.20mm (H).

2. Product Specifications

2.1 Capacity and Device Parameters

2.5" SATA SSD 3SE device parameters are shown in Table 1.

Table 1: Device parameters

Capacity	LBA	Cylinders	Heads	Sectors	User Capacity(MB)
2GB	3928176	1959	16	63	1918
4GB	7835184	7773	16	63	3826

2.2 Performance

Burst Transfer Rate: 6.0Gbps

Table 2: Performance

Capacity	2GB	2GB (24nm)	4GB	4GB (24nm)
Sequential Read (max.)	50 MB/s	35 MB/s	68 MB/s	68 MB/s
Sequential Write (max.)	25 MB/s	25 MB/s	50 MB/s	50 MB/s

Note: Base on CrystalDiskMark 3.01 with file size 1000MB

2.3 Electrical Specifications

2.3.1 Power Requirement

Table 3: InnoDisk 2.5" SATA SSD 3SE Power Requirement

Item	Symbol	Rating	Unit
Input voltage	V _{IN}	+5 DC +- 5%	V

2.3.2 Power Consumption

Table 4: Power Consumption

Mode	Power Consumption (mA)
Read	150 (max.)
Write	187 (max.)
Idle	110 (max.)

* Target: 2.5: SATA SSD 3SE 4GB

2.4 Environmental Specifications

2.4.1 Temperature Ranges

Table 5: Temperature range for 2.5" SATA SSD 3SE

Temperature	Range
Operating	Standard Grade: 0°C to +70°C
	Industrial Grade: -40°C to +85°C
Storage	-55°C to +95°C

2.4.2 Humidity

Relative Humidity: 10-95%, non-condensing

2.4.3 Shock and Vibration

Table 6: Shock/Vibration Testing for 2.5" SATA SSD 3SE

Reliability	Test Conditions	Reference Standards
Vibration	7 Hz to 2K Hz, 20G, 3 axes	IEC 60068-2-6
Mechanical Shock	Duration: 0.5ms, 1500 G, 3 axes	IEC 60068-2-27

2.4.4 Mean Time between Failures (MTBF)

Table 7 summarizes the MTBF prediction results for various 2.5" SATA SSD 3SE configurations. The analysis was performed using a RAM Commander™ failure rate prediction.

- **Failure Rate:** The total number of failures within an item population, divided by the total number of life units expended by that population, during a particular measurement interval under stated condition.
- **Mean Time between Failures (MTBF):** A basic measure of reliability for repairable items: The mean number of life units during which all parts of the item perform within their specified limits, during a particular measurement interval under stated conditions.

Table 7: 2.5" SATA SSD 3SE MTBF

Product	Condition	MTBF (Hours)
Innodisk 2.5" SATA SSD 3SE	Telcordia SR-332 GB, 25°C	>3,000,000

2.5 CE and FCC Compatibility

2.5" SATA SSD 3SE conforms to CE and FCC requirements.

2.6 RoHS Compliance

2.5" SATA SSD 3SE is fully compliant with RoHS directive.

2.7 Reliability

Parameter	Value
Read Cycles	Unlimited Read Cycles
Wear-Leveling Algorithm	Support
Bad Blocks Management	Support
Error Correct Code	Support
TBW (Unit: TB)	
2GB	108 (Sequential Write)
4GB	216 (Sequential Write)

2.8 Transfer Mode

2.5" SATA SSD 3SE support following transfer mode:

Serial ATA III 6.0Gbps

Serial ATA II 3.0Gbps

Serial ATA I 1.5Gbps


2.9 Pin Assignment

Innodisk 2.5" SATA SSD 3SE uses a standard SATA pin-out. See Table 8 for 2.5" SATA SSD 3SE pin assignment.

Table 8: Innodisk 2.5" SATA SSD 3SE Pin Assignment

Name	Type	Description
S1	GND	NA
S2	A+	Differential Signal Pair A
S3	A-	
S4	GND	NA
S5	B-	Differential Signal Pair B
S6	B+	
S7	GND	NA
Key and Spacing separate signal and power segments		
P1	NC	NA
P2	NC	NA
P3	NC	NA
P4	GND	NA
P5	GND	NA
P6	GND	NA
P7	V5	5V Power, Pre-Charge
P8	V5	5V Power
P9	V5	5V Power
P10	GND	NA
P11	DAS/DSS	Device Activity Signal / Disable Staggered
P12	GND	NA
P13	NC	NA
P14	NC	NA
P15	NC	NA

2.10 Mechanical Dimensions

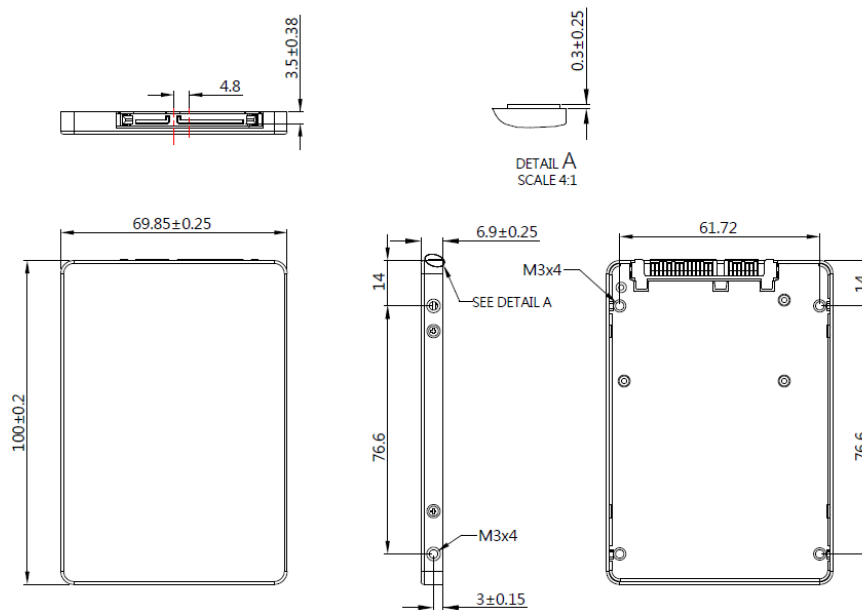

2.11 Assembly Weight

An Innodisk 2.5" SATA SSD 3SE with SLC flash ICs, 16GB's weight is 100 grams approx. The total weight of SSD will be less than 135 grams.

2.12 Seek Time

Innodisk 2.5" SATA SSD 3SE is not a magnetic rotating design. There is no seek or rotational latency required.

2.13 Hot Plug

The SSD support hot plug function and can be removed or plugged-in during operation. User has to avoid hot plugging the SSD which is configured as boot device and installed operation system.

Surprise hot plug : The insertion of a SATA device into a backplane (combine signal and power) that has power present. The device powers up and initiates an OOB sequence.

Surprise hot removal: The removal of a SATA device from a powered backplane, without first being placed in a quiescent state.

2.14 NAND Flash Memory

Innodisk 2.5" SATA SSD 3SE uses Single Level Cell (SLC) NAND flash memory, which is non-volatility, high reliability and high speed memory storage. There are only two statuses 0 or 1 of one cell. Read or Write data to flash memory for SSD is control by microprocessor.

3. Theory of Operation

3.1 Overview

Figure 2 shows the operation of Innodisk 2.5" SATA SSD 3SE from the system level, including the major hardware blocks.

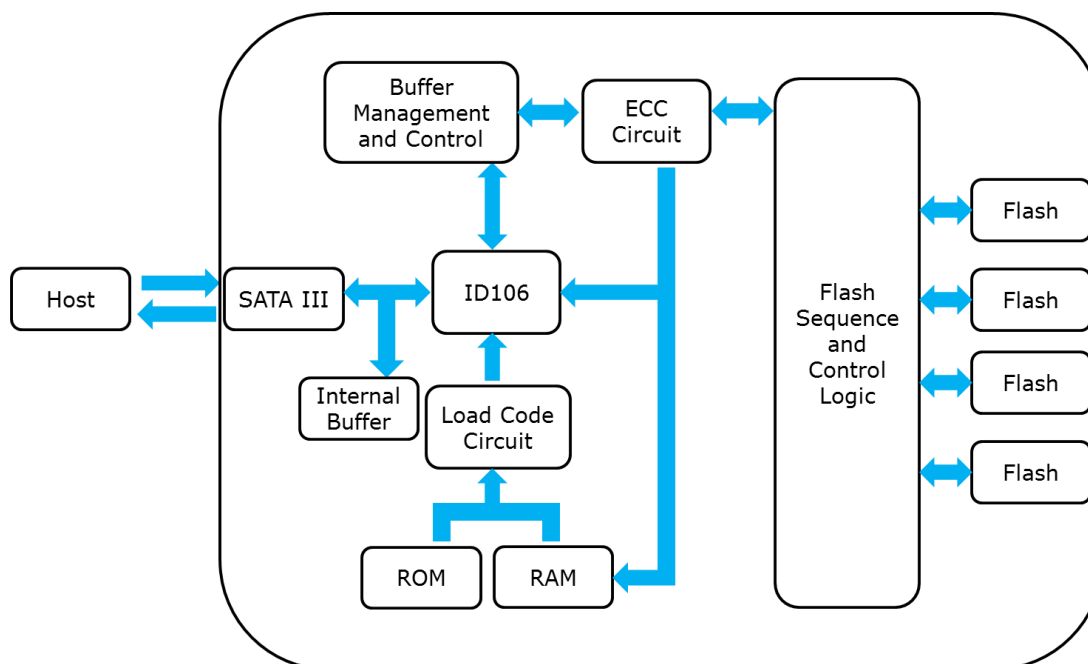


Figure 2: Innodisk FiD 2.5" SATA SSD 3SE Block Diagram

Innodisk 2.5" SATA SSD 3SE integrates a SATA III controller and NAND flash memories. Communication with the host occurs through the host interface, using the standard ATA protocol. Communication with the flash device(s) occurs through the flash interface.

3.2 SATA III Controller

Innodisk 2.5" SATA SSD 3SE is designed with ID 106, a SATA III 6.0Gbps (Gen. 3) controller. The Serial ATA physical, link and transport layers are compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps/3.0Gbps/6.0Gbps data rate). The controller has 4 channels for flash interface.

3.3 Error Detection and Correction

Highly sophisticated Error Correction Code algorithms are implemented. The ECC unit consists of the Parity Unit (parity-byte generation) and the Syndrome Unit (syndrome-byte computation). This unit implements an algorithm that can correct 40 bits per 1024 bytes in an ECC block. Code-byte generation during write operations, as well as error detection during read operation, is

implemented on the fly without any speed penalties.

3.4 Wear-Leveling

Flash memory can be erased within a limited number of times. This number is called the **erase cycle limit** or **write endurance limit** and is defined by the flash array vendor. The erase cycle limit applies to each individual erase block in the flash device.

Innodisk 2.5" SATA SSD 3SE uses a static wear-leveling algorithm to ensure that consecutive writes of a specific sector are not written physically to the same page/block in the flash. This spreads flash media usage evenly across all pages, thereby extending flash lifetime.

3.5 Bad Blocks Management

Bad Blocks are blocks that contain one or more invalid bits whose reliability are not guaranteed. The Bad Blocks may be presented while the SSD is shipped, or may develop during the life time of the SSD. When the Bad Blocks is detected, it will be flagged, and not be used anymore. The SSD implement Bad Blocks management, Bad Blocks replacement, Error Correct Code to avoid data error occurred. The functions will be enabled automatically to transfer data from Bad Blocks to spare blocks, and correct error bit.

3.6 Power Cycling

Innodisk's power cycling management is a comprehensive data protection mechanism that functions before and after a sudden power outage to SSD. Low-power detection terminates data writing before an abnormal power-off, while table-remapping after power-on deletes corrupt data and maintains data integrity. Innodisk's power cycling provides effective power cycling management, preventing data stored in flash from degrading with use.

3.7 Garbage Collection

Garbage collection is used to maintain data consistency and perform continual data cleansing on SSDs. It runs as a background process, freeing up valuable controller resources while sorting good data into available blocks, and deleting bad blocks. It also significantly reduces write operations to the drive, thereby increasing the SSD's speed and lifespan.

3.8 Write Protect (Optional)

When Write Protect pins (pin 3 and pin 4) are shorted, Write Protect function would be enabled, and ATA write command would be aborted, which can prevent the disk from data modification or data deletion. Write-protected data in disk is read-only, that is, users could not write to it, edit it, append data to it, or delete it.

4. Installation Requirements

4.1 2.5" SATA SSD 3SE Pin Directions

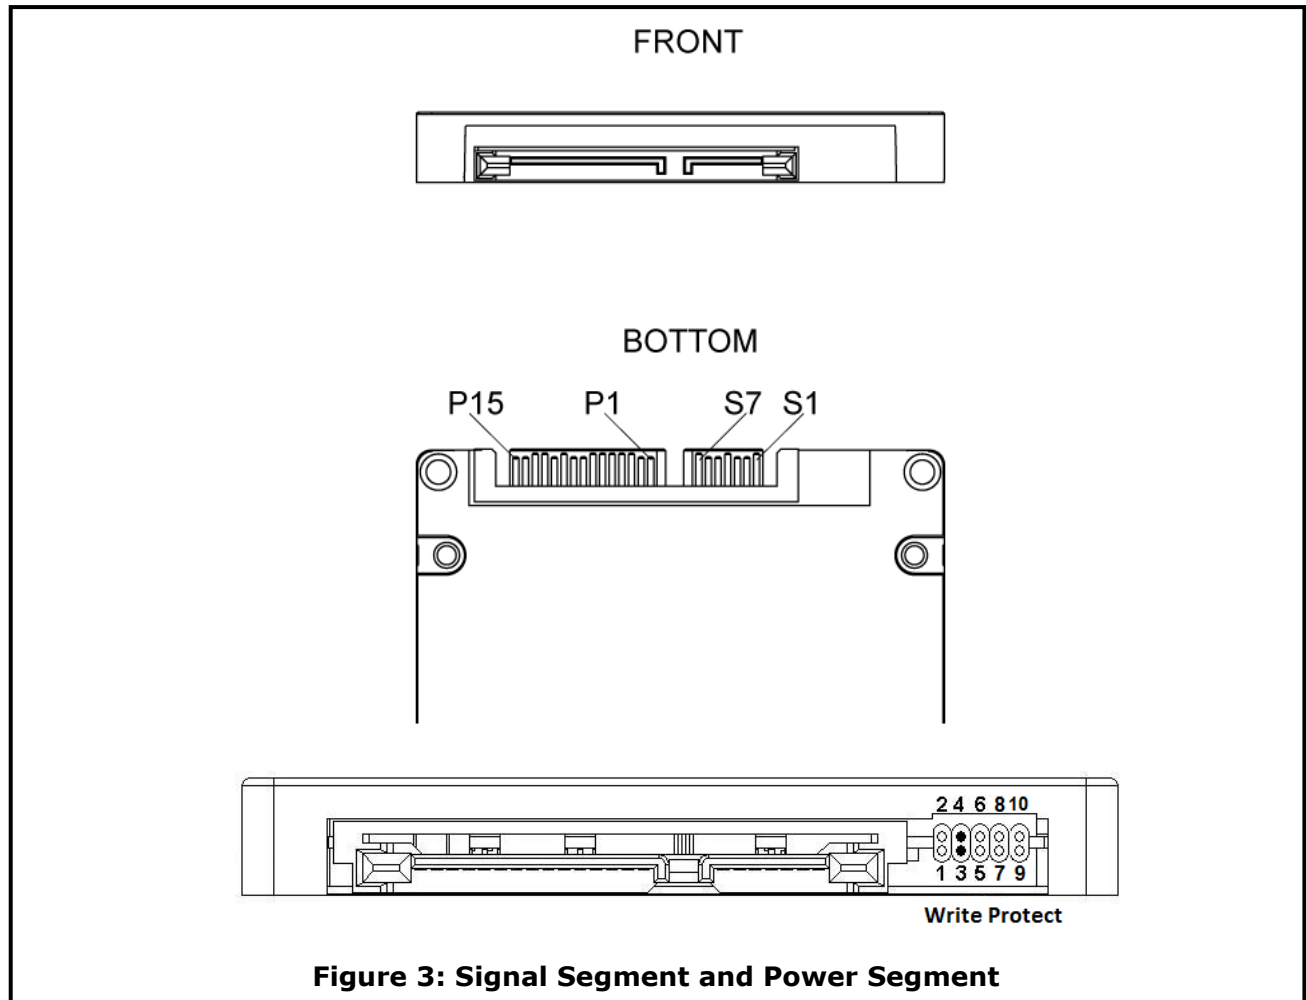


Figure 3: Signal Segment and Power Segment

4.2 Electrical Connections for 2.5" SATA SSD 3SE

A Serial ATA device may be either directly connected to a host or connected to a host through a cable. For connection via cable, the cable should be no longer than 1 meter. The SATA interface has a separate connector for the power supply. Please refer to the pin description for further details.

4.3 Form Factor

Please prepare following things:

- Screw driver.
- Four M3 screws.
- SATA single cable (7-pin, Maximum length 1 meter).
- SATA power cable (15-pin).

Please turn off your computer, and open your computer's case. Find one of available 2.5-inch slot, and plug the SSD in. To use the screws fix the SSD. Plug in the SATA single cable, and power cable.

Please boot the installation Operation System from CD-ROM, and install Operation System into SSD.

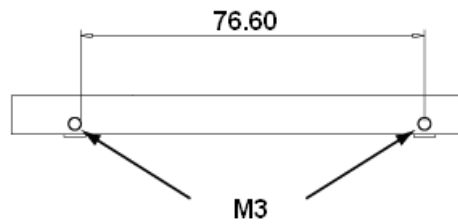


Figure 4: 2.5" SATA SSD 3SE Mechanical Screw Hole


4.4 Device Drive

No additional device drives are required. Innodisk 2.5" SATA SSD 3SE can be configured as a boot device.

5. Part Number Rule

CODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	D	E	S	2	5	-	0	4	G	D	0	7	S	C	1	D	B	-	X	X
Definition																				
Code 1 st (Disk)										Code 14 th (Operation Temperature)										
D : Disk										C: Standard Grade (0°C~ +70°C)										
										W: Industrial Grade (-40°C~ +85°C)										
Code 2 nd ~ 5 th (Form Factor)										Code 15 th (Internal control)										
ES25: 2.5" SATA SSD 3SE										1~9/A~Z: PCB Version										
Code 7 th ~9 th (Capacity)										Code 16 th (Channel of data transfer)										
02G: 2GB										S: Single Channel										
04G: 4GB										D: Dual Channels										
Code 10 th ~12 th (Series)										Code 17 th (Flash Type)										
D07: 2.5" SATA SSD 3SE										B: Kioxia SLC										
Code 13 th (Flash Mode)										Code 19 th ~20 th (Customized Code)										
S: Synchronous flash																				
A: Asynchronous flash																				

6. Appendix

<i>Verification of Compliance</i>	
Product Name	: 2.5" SATA SSD 3SE/3SE-P
Model Number	: DES25-XXXD06*#%※&/DES25-XXXD67*#%※& XXX: 8GB~256GB * : Flash Mode # : Temperature (C : Commercial Temp W : Industrial Temp) % : PCB Version (A, B, C.... or 1, 2, 3...) ※ : Channel (S : Single, D : Dual, Q : Quad, E : Eight) & : Flash Vender (T : Micron SLC, S : Samsung SLC, M : Samsung MLC, N : Micron MLC, B : Toshiba SLC, C : Toshiba MLC)
Applicant	: Innodisk Corporation
Address	: 9F, No.100, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan
Report Number	: O22-U070-1309-208
Issue Date	: October 3, 2013
Applicable Standards	: EN 55022:2010+AC:2011 Class B ITE AS/NZS CISPR22:2009+A1:2010 Class B ITE EN 55024:2010 EN 61000-4-2:2009 EN 61000-4-3:2006+A1:2008+A2:2010 EN 61000-4-4:2012
Based on the EMC Directive 2004/108/EC and the specifications of the customer, one sample of the designated product has been tested in our laboratory and found to be in compliance with the EMC standards cited above.	
	
TAF 0905 FCC CAB Code TW1053 NVLAP Lab Code 200575-0 IC Code 4699A VCCI Accep. No. R-1527, C-1609, T-1441, G-10, C-4409, T-1334, G-614	Central Research Technology Co. EMC Test Laboratory 11, Lane 41, Fushuen St., Jungshan Chiu, Taipei, Taiwan, 104, R.O.C. Tel : 886-2-25984568 Fax: 886-2-25984546
	 (Tsun-Yu Shih/ General Manager) Date: <u>October 3, 2013</u>

Verification of Compliance

Product Name : 2.5" SATA SSD 3SE/3SE-P
 Model Number : DES25-XXXD06* # % ※ & / DES25-XXXD67* # % ※ &
 XXX: 8GB~256GB
 * : Flash Mode
 # : Temperature (C : Commercial Temp W : Industrial Temp)
 % : PCB Version (A, B, C.... or 1, 2, 3...)
 ※ : Channel (S : Single, D : Dual, Q : Quad, E : Eight)
 & : Flash Vender (T : Micron SLC, S : Samsung SLC,
 M : Samsung MLC, N : Micron MLC, B : Toshiba SLC,
 C : Toshiba MLC)

Applicant : Innodisk Corporation
 Address : 9F, No.100, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221,
 Taiwan

Report Number : F-U070-1309-208
 Issue Date : October 3, 2013

Applicable Standards : FCC Part 15, Subpart B Class B ITE
 ANSI C63.4:2009
 Industry Canada ICES-003 Issue 5
 CSA-IEC CISPR22-10 Class B ITE

One sample of the designated product has been tested in our laboratory and found to be in compliance with the FCC rules cited above.





NVLAP LAB CODE 200575-0

TAF 0905
 FCC CAB Code TW1053
 IC Code 4699A
 VCCI Accep. No. R-1527, C-1609, T-1441, G-10,
 C-4400, T-1334, G-614



Central Research Technology Co.
 EMC Test Laboratory
 11, Lane 41, Fushuen St., Jungshan Chiu,
 Taipei, Taiwan, 104, R.O.C.
 Tel : 886-2-25984568
 Fax: 886-2-25984546



 (Tsun-Yu Shih/ General Manager)
 Date: October 3, 2013

宜鼎國際股份有限公司 Innodisk Corporation

Tel:(02)7703-3000 Fax:(02) 7703-3555 Internet: <http://www.innodisk.com/>

RoHS 自我宣告書 (RoHS Declaration of Conformity)

Manufacturer Product: All Innodisk EM Flash and Dram products

- 一、 宜鼎國際股份有限公司（以下稱本公司）特此保證售予貴公司之所有產品，皆符合歐盟 2011/65/EU 關於 RoHS 之規範要求。

Innodisk Corporation declares that all products sold to the company, are complied with European Union RoHS Directive (2011/65/EU) requirement

- 二、 本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。

Innodisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

Name of hazardous substance	Limited of RoHS ppm (mg/kg)
Cd	< 100 ppm
Pb	< 1000 ppm
Hg	< 1000 ppm
Chromium VI (Cr+6)	< 1000 ppm
Polybromodiphenyl ether (PBDE)	< 1000 ppm
Polybrominated Biphenyls (PBB)	< 1000 ppm

立 保 證 書 人 (Guarantor)

Company name 公司名稱： Innodisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人： Richard Lee 李鐘亮

Company Representative Title 公司代表人職稱： CEO 執行長

Date 日期： 2014 / 07 / 29



innodisk

宜鼎國際股份有限公司 Innodisk Corporation

Tel:(02)7703-3000 Fax:(02) 7703-3555 Internet: <http://www.innodisk.com/>

REACH Declaration of Conformity

Manufacturer Product: All Innodisk EM Flash and Dram products

1.宜鼎國際股份有限公司（以下稱本公司）特此保證此售予貴公司之產品，皆符合歐盟化學品法案(Registration , Evaluation and Authorization of Chemicals ; REACH)之規定

(<http://www.echa.europa.eu/de/candidate-list-table> last updated: 16/05/2014)。所提供之產品包含：(1) 產品或產品所使用到的所有原物料；(2)包裝材料；(3)設計、生產及重工過程中所使用到的所有原物料。

We Innodisk Corporation hereby declare that our products are in compliance with the requirements according to the REACH Regulation

(<http://www.echa.europa.eu/de/candidate-list-table> last updated: 16/06/2014).

Products include : 1) Product and raw material used by the product ; 2) Packaging material ; 3) Raw material used in the process of design, production and rework

2.本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。

InnoDisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

立 保 證 書 人 (Guarantor)

Company name 公司名稱： InnoDisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人： Richard Lee 李鐘亮

Company Representative Title 公司代表人職稱： CEO 執行長

Date 日期： 2014 / 07 / 29

