




Features

- iSMART intelligent energy-saving & Observer remote monitoring technologies
- 13th/12th Gen Intel® Core™ i7/i5/i3 / Pentium® / Celeron® QC/ DC processors
- 4x DDR4-3200 U-DIMM, Max. 128GB, ECC compatible
- NVIDIA Ampere Architecture MXM GPU cards (Type A/B, up to 115W)
- 1x HDMI 1.4 for console, 4x DisplayPort
- 1x M.2 E-key (2230) for WiFi, Bluetooth or capture card options
- 1x M.2 B-key (3052) for 5G options
- 2x M.2 NVMe SSD drive bay
- Supports OOB function via I210 LAN port (option)
- Supports TPM 2.0
- Compact and rugged design

Ordering Information

SI-624-AI	Industrial AI computer with MBD624 with 13th/12th Gen Intel® Core™ processors, 1x NVIDIA MXM GPU card, M.2 128GB, 4x DDR4-3200 U-DIMM, Max. 128GB and 330W power adapter
-----------	--

Dimensions and Drawing

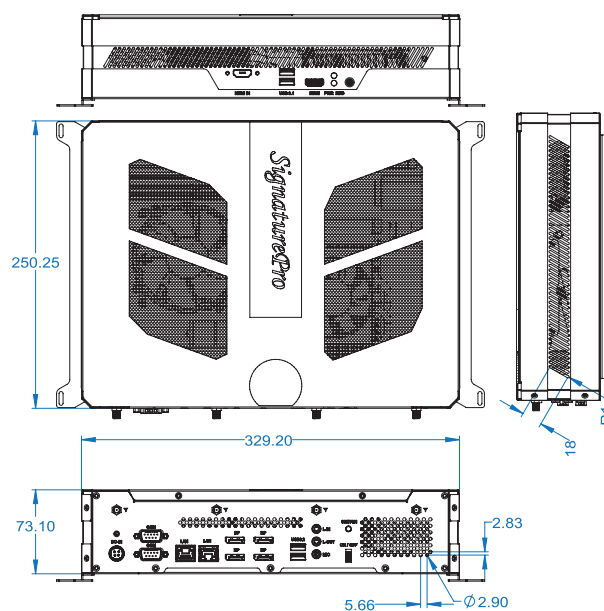

Specifications

System Mainboard	MBD624
CPU Type	13th/12th Gen Intel® Core™ processors
System Speed	Up to Max. 5.0/3.8GHz
Memory	4x DDR4-3200 U-DIMM, Max. 128GB, ECC compatible
Front Panel External I/O	2x Gigabit LAN 1x HDMI 1.4 for console 1x HDMI-in for capture card (optional) 2x USB 3.2 1x Power / HDD LED 1x power button
Rear Panel External I/O	4x DisplayPort 2x USB 3.2 2x RJ45 for Gigabit LAN 2x RS-232 Serial port 1x Audio connector for Line-in/out/Mic 1x Power jack connector
Expansion Slots	1x M.2 (M-key, type:2280, supports NVMe with PCI-E(x4) Gen.4 signal only) 1x M.2 (E-key, type: 2230, 2x PCI-E(x1), USB 2.0; supports CNVi) 1x M.2 (B-key, type:3052, supports 5G/4G/LTE) 1x UIM/SIM card slot
Storage	1x M.2 M-key (2280)
Construction	SGCC
Chassis Color	Black and white
Mounting Type	Standard system bracket
Dimensions	329.2mm(W) x 210mm(D) x 73.1mm(H) 129.6"(W) x 82.6"(D) x 28.7"(H)
Weight	3.8kg
Operating Temperature	0°C ~ 45°C (32°F ~ 113°F)
Storage Temperature	-20°C ~ 80°C (-4°F ~ 176°F)
Relative Humidity	5%~90% @45°C (non-condensing)
Vibration	SSD: 5 grms / 5~500Hz / random operation
Shock	0°C ~ 45°C (32°F ~ 113°F) -20°C ~ 80°C (-4°F ~ 176°F) 5%~90% @45°C (non-condensing) SSD: 5 grms / 5~500Hz / random operation
Certification	CE/FCC class-B, UL, LVD & CCC