

# FM07E

7inch Windows Vehicle Mounted Computer with Intel Atom® x6413E



## KEY FEATURES

- Intel Atom® x6413E Elkhart Lake, Windows Vehicle Mounted Computer
- 7" 1024 x 600 panel with projected capacitive Multi-Touch screen
- Wide power input 9-36V DC with ignition
- M12 waterproof connectors
- IP65 waterproof and dustproof
- Shock and vibration resistance according to MIL-STD-810G

## INTRODUCTION

The FM-V Series Windows Vehicle Mounted Computer (VMC) is designed for reliable performance in demanding industrial and automotive environments. Available in sizes from 7" to 14", it offers processor options ranging from Intel® Celeron® N6211 and N3350 to the powerful 12th Gen Intel® Alder Lake processors. Built with an IP65-rated waterproof and dustproof enclosure, wide 10-60V DC power input with ignition support, and a rugged design for extreme temperatures, the FM-V Series ensures durability and efficiency. VESA mount compatibility provides easy installation, making it ideal for fleet management, logistics, and warehouse operations.

## SPECIFICATIONS

### Display

Resolution	1024x600	Size	7.0 inches
Contrast Ratio	700:1	Panel Brightness	1000.0 nits
View Angles	75,75,75,70	Active Area	153.6x90 mm
Touch / Glass	Projected Capacitive Multi Touch Screen		

### System Specification

Processor	Intel Atom x6413E 1.5GHz (up to 3GHz)	Memory	1 x SO-DIMM, DDR4 3200 MHz, 4GB 8GB (Optional) 16GB (Optional)
Storage	1 x M.2 2242 SSD 128GB 256GB (Optional) 512GB (Optional)	Ethernet controller	1 x Intel® Ethernet Controller
Security	TPM 2.0	Operating System	Windows 10 IoT Enterprise (64 bit) Windows 11 IoT Enterprise LTSC (64 bit) (Optional) Linux Ubuntu 22.04 (Optional)
WLAN	Support	BT	Support
WWAN	4G/LTE (Optional)	GNSS	GPS, GLONASS


### Environment

Operating Humidity	10% to 95% RH	Operating Temperature	-20°C~60°C
Storage Temperature	-20°C~60°C	Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I	IP rating	IP65, Dustproof and Waterproof

### Certification

Certification		CE, FCC	
IO Ports			
USB Port	2 x USB for DB9 1 x Micro USB	Serial Port	1 x RS232/422/485 (Default RS232)
SIM Card Slot	1 x Micro SIM Card Slot	Audio	1x Speaker
LAN	1 x Gigabit Ethernet LAN 10/100/1000 Mbps (M12 type)	Front Control	5 x Function Key
Indicator	Power, HD	DIDO	DIDO (5XDI ; 3XDO)
CANBUS	2 x CANBUS		
Control			
Button	1 x Power Button, 5x Function Button (Programmable Function Key Configured by Winset)		
Mechanical			
Dimension	190 x 146 x 40 mm	Weight	1.25 kg
Mounting	RAM mount	Cooling System	Fanless Design
Accessory			
Accessory	User Guide M12 LAN Cable, 1.8m RS-232 Cable, 1.8m M12 Power Cable, 1.8m USB Cable, 0.3m CANBus and DIDO Cable, 1.8m WLAN Antenna Power Converter Cable Power Adapter	Optional Accessory	WWAN Antenna x 2 (Optional) Audio Cable, 0.3m (Optional) GPS Antenna, 3m (Optional)
Power			
Power Rating	9V-36V, with ignition control	Consumption	Max: 35W

## DIMENSIONS UNIT:MM

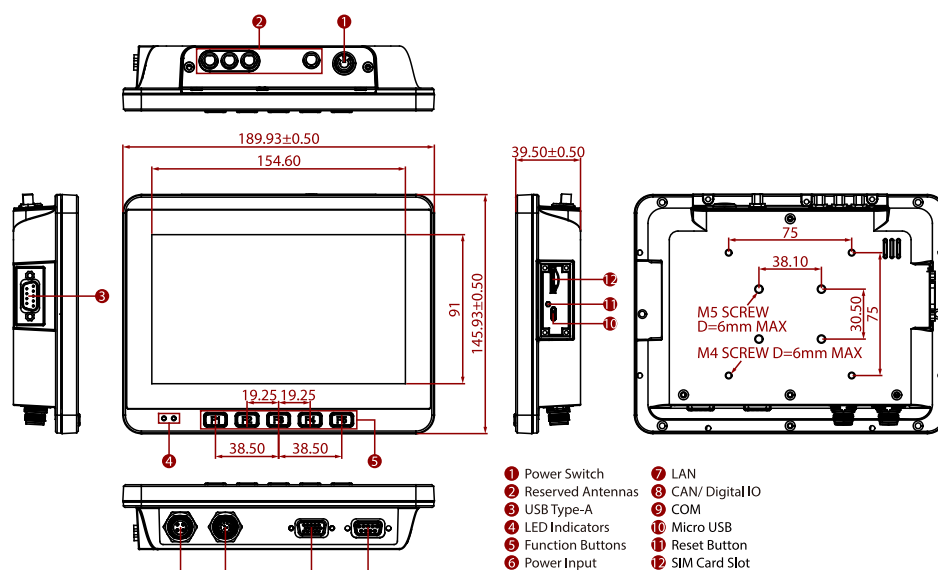

## NOTE

1. Total usable memory will be less dependent upon actual system configuration.
2. Length measurements do not include protrusions. Weight varies with options.
3. Accessories may vary depending on your configuration.
4. This is a simplified drawing and some components are not marked in detail.
5. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
6. COM port can supply 5V power via the 9th pin.