

SKU1 (Intel® R680E) SKU2 (Intel® Q670E)

MS-CF05

Industrial Computer Board

User Guide

Contents

Regulatory Notices	5
Safety Information	8
General Safety Instructions	8
Electrostatic Discharge (ESD) Precautions	
Power Safety	
Installation Instructions	
When to Contact Service Personnel	9
Specifications	10
Motherboard Overview	13
SKU1	13
SKU2	14
Rear I/O Panel	15
SKU1	15
SKU2	15
DisplayPort	16
HDMI™ Connector	16
RS232/422/485 Serial Port	16
VGA Port	16
2.5 GbE RJ-45 LAN Jacks	17
USB 10Gbps Ports	17
Line-Out Jack	
Mic-In Jack	
CPU Socket	
Introduction to the LGA1700 CPU	20
CPU & Heatsink Installation	21
Memory Slots	22
DIMM1~2: DDR5 DIMM Slots	22
Recommended Memory Population	22
Installing Memory Modules	23

Revision

V1.4, 2025/02

Storage Connectors	24
SATA1_2, 3_4: SATA 3.0 6Gb/s Ports	24
Expansion Slots	25
PCIe Slots	25
PCIE1~7: PCIe Expansion Slots	25
M.2 Slots	26
M2_M1: M.2 Slot (M Key, PCIe 4.0 x4, 2280/ 22110)	
M2_M2: M.2 Slot (M Key, PCIe 4.0 x4/x2/x1, 2242/ 2280)	
M2_E1: M.2 Slot (E Key, 2230) (SKU1 Only)	
M2_B1: M.2 Slot (B Key, 2242/ 2280) (SKU1 Only)	
Power Connectors	28
JPWR1: 24-Pin ATX Power Connector	28
JPWR2: 8-Pin ATX 12V Power Connector	28
Cooling Connectors	29
CPUFAN1, SYSFAN1~3: CPU/ System Fan Connectors	29
Audio Connectors	30
JAUD1: Front Audio Header (Line-out/ MIC-in)	30
JSPDIF1: S/PDIF Header	30
USB Connectors	31
JUSB2: USB 5Gbps Header	31
JUSB1: USB 2.0 Header	32
USB1: USB 2.0 Type-A Port	32
Other Connectors and Components	33
JFP1: Front Panel Header	33
JGPIO1: GPI Header	33
JGPIO2: GPO Header	33
JPMBUS1: PMBus Header	34
JSMB1: I2C Header	34
JI2C1: SMBus Header	34
COM2~6: Serial Port Headers	35
JLAN_LED: LAN LED Header	37
JKBMS1: PS/2® Keyboard & Mouse Connector	37
ICASE1: Chassis Intrusion Header	38

JLPT1: Parallel Port Connector	38
BAT1: CMOS Battery	39
Replacing CMOS battery	39
Jumpers	40
BIOS Setup	42
Entering Setup	42
The Menu Bar	44
Main	45
Advanced	46
Boot	53
Security	54
Chipset	62
Power	63
Save & Exit	64
GPIO WDT BKL Programming	65
Abstract	
General Purpose IO	66
Watchdog Timer	
SMBus Access	

Regulatory Notices

CE Conformity

Hereby, Micro-Star International CO., LTD declares that this device is in compliance with the essential safety requirements and other relevant provisions set out in the European Directive.



FCC-B Radio Frequency Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the measures listed below:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

Notice 1

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Notice 2

Shielded interface cables and AC power cord, if any, must be used in order to comply with the emission limits.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- 2. This device must accept any interference received, including interference that may cause undesired operation.

WEEE Statement

Under the European Union ("EU") Directive on Waste Electrical and Electronic Equipment, Directive 2012/19/EU, products of "electrical and electronic equipment" cannot be discarded as municipal waste anymore and manufacturers of covered electronic equipment will be obligated to take back such products at the end of their useful life.



Chemical Substances Information

In compliance with chemical substances regulations, such as the EU REACH Regulation (Regulation EC No. 1907/2006 of the European Parliament and the Council), MSI provides the information of chemical substances in products at:

https://csr.msi.com/global/index

Battery Information

Please take special precautions if this product comes with a battery.

- Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer.
- Avoid disposal of a battery into fire or a hot oven, or mechanically crushing or cutting
 of a battery, which can result in an explosion.
- Avoid leaving a battery in an extremely high temperature or extremely low air pressure environment that can result in an explosion or the leakage of flammable liquid or gas.
- Do not ingest battery. If the coin/button cell battery is swallowed, it can cause severe internal burns and can lead to death. Keep new and used batteries away from children.

European Union:



Batteries, battery packs, and accumulators should not be disposed of as unsorted household waste. Please use the public collection system to return, recycle, or treat them in compliance with the local regulations.

BSMI:



廢電池請回收

For better environmental protection, waste batteries should be collected separately for recycling or special disposal.

California, USA:



The button cell battery may contain perchlorate material and requires special handling when recycled or disposed of in California.

For further information please visit:

http://www.dtsc.ca.gov/hazardouswaste/perchlorate/

Environmental Policy

- The product has been designed to enable proper reuse of parts and recycling and should not be thrown away at its end of life.
- Users should contact the local authorized point of collection for recycling and disposing of their end-of-life products.



- Visit the MSI website and locate a nearby distributor for further recycling information.
- Users may also reach us at gpcontdev@msi.com for information regarding proper disposal, take-back, recycling, and disassembly of MSI products.
- Please visit < https://us.msi.com/page/recycling for information regarding the recycling of your product in the US.

Copyright and Trademarks Notice







Copyright © Micro-Star Int'l Co., Ltd. All rights reserved. The MSI logo used is a registered trademark of Micro-Star Int'l Co., Ltd. All other marks and names mentioned may be trademarks of their respective owners. No warranty as to accuracy or completeness is expressed or implied. MSI reserves the right to make changes to this document without prior notice.



The terms HDMI™. HDMI™ High-Definition Multimedia Interface. HDMI™ Trade dress and the HDMI™ Logos are trademarks or registered trademarks of HDMI™ Licensing Administrator, Inc.

Technical Support

If a problem arises with your product and no solution can be obtained from the user's manual, please contact your place of purchase or local distributor. Alternatively, please visit https://www.msi.com/support/ for further guidance.

Safety Information

Please read and follow these safety instructions carefully before installing, operating or performing maintenance on the equipment.

General Safety Instructions

- Always read the safety instructions carefully.
- Keep this User's Manual for future reference.
- Keep this equipment in a dry, humidity-free environment.
- Ensure that all components are securely connected to prevent issues during operation.
- Do not cover the air openings to prevent overheating.
- Avoid spilling liquids into the equipment to prevent damage or electrical shock.
- Do not leave the equipment in an unconditioned environment. Storage temperatures above 60°C (140°F) may cause damage.

Electrostatic Discharge (ESD) Precautions

The components included in this package are sensitive to electrostatic discharge. Follow these guidelines to prevent ESD-related damage:

- Hold the motherboard by the edges to avoid touching sensitive components.
- Wear an ESD wrist strap. If not available, discharge static electricity by touching a metal object before handling.
- When not installed, store the motherboard in an electrostatic shielding container or place it on an anti-static pad.

Power Safety

- Always turn off the power supply and unplug the power cord from the outlet before installing or removing any component.
- Ensure the electrical outlet provides the same voltage as indicated on the PSU before connecting.
- Arrange the power cord to avoid tripping hazards or damage. Do not place objects over the power cord.

Installation Instructions

- Lay the equipment on a stable, flat surface before setting it up.
- Before turning on the system, ensure there are no loose screws or metal components on the motherboard or within the system case.
- Do not boot the computer before completing all installations. Premature booting can cause permanent damage to components and pose safety risks.

When to Contact Service Personnel

Immediately consult service personnel if any of the following situations arise:

- The power cord or plug is damaged.
- Liquid has entered the equipment.
- The equipment has been exposed to moisture.
- The equipment does not function as described in the User Guide.
- The equipment has been dropped or physically damaged.
- The equipment shows visible signs of breakage.

Specifications

Model	MS-CF05-SKU1 MS-CF05-SKU2				
Dimensions	305(L)mm x 244(W)mm x 1.6(H)mm, ATX-Size				
Processor	 Intel® IOTG Raptor Lake-S Refresh Processor Core™ i9/i7/i5/i3 i9-14900K (125W) / i9-14900KF (125W)/ i9-14900 (65W)/ i9-14900F (65W)/ i9-14900T (35W) i7-14700K (125W) / i7-14700KF (125W)/ i7-14700 (65W) / i7-14700F (65W)/i7-14700T (35W) i5-14600K (125W)/ i5-14600KF (125W)/				
Chipset	Intel® R680E	Intel® Q670E			
Memory	 4 x DDR5 UDIMM slots (288-pin, vertical) Up to 4400 MT/s Up to 128GB 				
	- Dual-Channel DDR5, ECC/ Non-ECC	- Dual-Channel DDR5, Non-ECC			
Network	• 4 x Intel® I225-LM PCIe 2.5GbE LAN - LAN1: Supports iAMT 16.X • 2 x Intel® I225-LM PCIe 2.5GbE LA - LAN1: Supports iAMT 16.X				
Storage	4 x SATA 3.0 6Gb/s connectors Support RAID 0/1/5 Support AHCI mode				
Audio	• Realtek® ALC897 High Definition Audio Co	dec			


Continued on next column


Model	MS-CF05-SKU1	MS-CF05-SKU2			
Graphics	1 x DP 1.4a, up to 4096×2304 @60Hz 1 x HDMI™ 2.0b, up to 4096x2160 @60Hz 1 x VGA, up to 1920x1200 @60Hz 3 independent display modes supported DP HDMI™ VGA	M3 C103 3NO2			
Expansion Slots	is in use, it operates at 5.0 x16 speed, while the f and PCIE4 slots are occupied, they both run at 5 ** It is necessary to remove the M.2 screw when	.0 x8 speed. installing a PCIe x8 or x16 card in PCIE5.			
	*** The HDD LED cannot be enabled when installing PCIe 3.0 x2 NVMe SSD in M2_B1.				

Continued on next column

Model	MS-CF05-SKU1 MS-CF05-SKU2				
Model Rear I/O Onboard Connector	 1 x DisplayPort (1.4a) 1 x HDMI™ connector (2.0b) 1 x VGA port 1 x DB-9 RS-232/422/485 serial port				
Power	 1 x LAN LED header 1 x PS/2® Keyboard & Mouse connector 1 x Chassis Intrusion header 6 x COM voltage select jumpers 1 x AT/ ATX mode select jumper 1 x ME jumper 1 x Clear CMOS jumper 1 x 24-pin ATX power connector 				
	1 x 4-pin 12V ATX power connector				
OS Support	Windows 10 IoT Enterprise 2021 LTSC (64-bit) Windows 11 IoT Enterprise LTSC 24H2 (64-Bit) Linux Kernel 5.xx, Ubuntu 22.04 LTS Pre-scan				
Certification	CE, FCC Class B, BSMI, RCM, VCCI, UKCA				
Environment	 Operating Temperature: 0 ~ 60°C Storage Temperature: -20 ~ 80°C Relative Humidity: 10 ~ 90%, non-condensing 				


Motherboard Overview

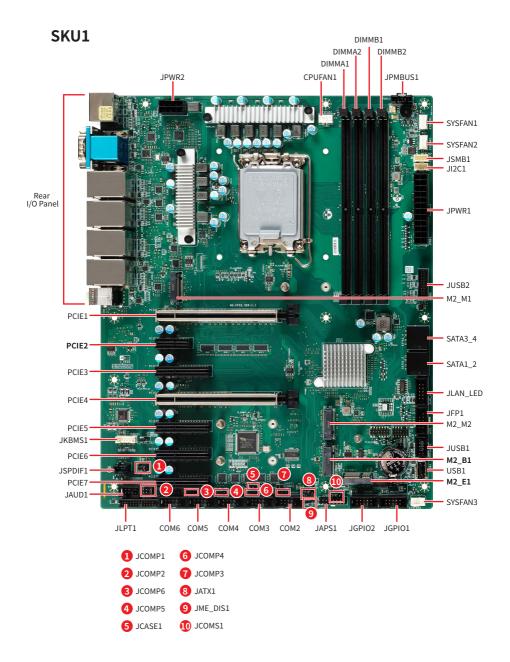

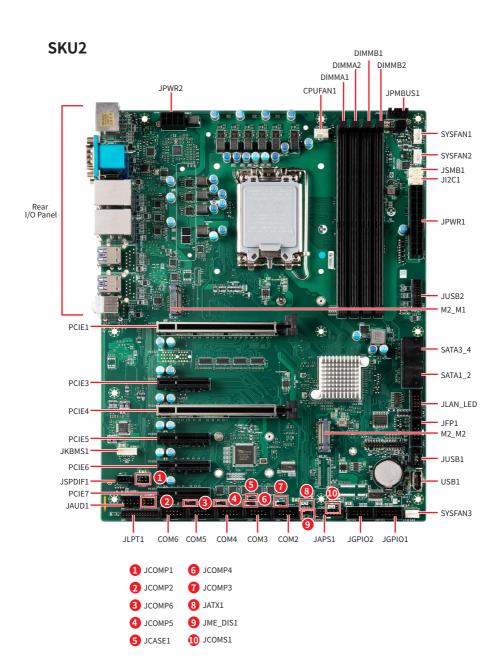


Rear I/O Panel

SKU1

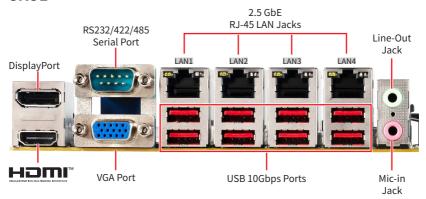

SKU2

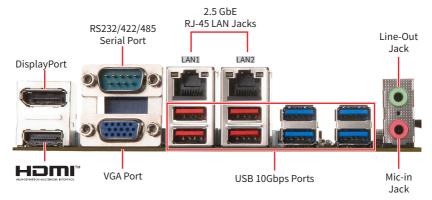

DisplayPort

DisplayPort is a digital display interface standard. This connector is used to connect a monitor with DisplayPort inputs.

HDMI™ Connector H⊃mI™

HDMI™ is a digital interface for uncompressed audio/video streams, accommodating all TV formats and multi-channel audio on a single cable.

RS232/422/485 Serial Port

The serial port is a 16550A high speed communications port that sends/receives 16 bytes FIFOs. It supports barcode scanners, barcode printers, bill printers, credit card machine, etc.



	RS232			
PIN	SIGNAL	DESCRIPTION		
1	NDCD	Data Carrier Detect		
2	NSIN	Signal In		
3	NSOUT	Signal Out		
4	NDTR	Data Terminal Ready		
5	GND	Signal Ground		
6	NDSR	Data Set Ready		
7	NRTS	Request To Send		
8	NCTS	Clear To Send		
9	VCC_COM	VCC_COM		

	RS422				
PIN	SIGNAL	DESCRIPTION			
1	422 TXD-	Transmit Data, Negative			
2	422 TXD+	Transmit Data, Positive			
3	422 RXD+	Receive Data, Positive			
4	422 RXD-	Receive Data, Negative			
5	GND	Signal Ground			
6	NC	No Connection			
7	NC	No Connection			
8	NC	No Connection			
9	NC	No Connection			


	RS485			
PIN	SIGNAL	DESCRIPTION		
1	TXD-	Transmit Data, Negative		
2	NC	No Connection		
3	TXD+	Transmit Data, Positive		
4	NC	No Connection		
5	GND	Signal Ground		
6	NC	No Connection		
7	NC	No Connection		
8	NC	No Connection		
9	NC	No Connection		

VGA Port

The VGA port supports monitors and other VGA interface devices.

2.5 GbE RJ-45 LAN Jacks

The standard single RJ45 LAN jack is provided for connection to the Local Area Network (LAN). You can connect a network cable to it.

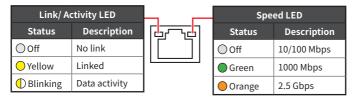

USB 10Gbps Ports

USB 10Gbps ports delivers high-speed data transfer for various devices, such as storage devices, hard drives, video cameras, etc.

Line-Out Jack

This connector is provided for headphones or speakers.

Mic-In Jack


This connector is provided for microphones.


Component Contents

Component	Page
CPU Socket	20
Memory Slots	22
DIMM1~2: DDR5 DIMM Slots	22
Storage Connectors	24
SATA1_2, 3_4: SATA 3.0 6Gb/s Ports	24
Expansion Slots	25
PCIe Slots	25
PCIE1~7: PCIe Expansion Slots	25
M.2 Slots	26
M2_M1: M.2 Slot (M Key, PCIe 4.0 x4, 2280/ 22110)	26
M2_M2: M.2 Slot (M Key, PCIe 4.0 x4/x2/x1, 2242/ 2280)	26
M2_E1: M.2 Slot (E Key, 2230) (SKU1 Only)	27
M2_B1: M.2 Slot (B Key, 2242/ 2280) (SKU1 Only)	27
Power Connectors	28
JPWR1: 24-Pin ATX Power Connector	28
JPWR2: 8-Pin ATX 12V Power Connector	28
Cooling Connectors	29
CPUFAN1, SYSFAN1~3: CPU/ System Fan Connectors	29
Audio Connectors	30
JAUD1: Front Audio Header (Line-out/ MIC-in)	30
JSPDIF1: S/PDIF Header	30
USB Connectors	31
JUSB2: USB 5Gbps Header	31
JUSB1: USB 2.0 Header	32
USB1: USB 2.0 Type-A Port	32
Other Connectors and Components	33
JFP1: Front Panel Header	33
JGPIO1: GPI Header	33
JGPIO2: GPO Header	33
JPMBUS1: PMBus Header	34

Component	Page
JSMB1: I2C Header	34
JI2C1: SMBus Header	34
COM2~6: Serial Port Headers	35
JLAN_LED: LAN LED Header	37
JKBMS1: PS/2® Keyboard & Mouse Connector	37
JCASE1: Chassis Intrusion Header	38
JLPT1: Parallel Port Connector	38
BAT1: CMOS Battery	39
Replacing CMOS battery	39
Jumpers	40

CPU Socket





Introduction to the LGA1700 CPU

The surface of the LGA1700 CPU has four notches and a golden triangle to assist in correctly lining up the CPU for motherboard placement. The golden triangle is the Pin 1 indicator.



Important

- Always unplug the power cord from the power outlet before installing or removing the CPU.
- When installing a CPU, always remember to install a CPU heatsink. A CPU heatsink is necessary to prevent overheating and maintain system stability.
- Confirm that the CPU heatsink has formed a tight seal with the CPU before booting your system.
- Overheating can seriously damage the CPU and motherboard. Always make sure the cooling fans work properly to protect the CPU from overheating. Be sure to apply an even layer of thermal paste (or thermal tape) between the CPU and the heatsink to enhance heat dissipation.
- Whenever the CPU is not installed, always protect the CPU socket pins by covering the socket with the plastic cap.
- If you purchased a separate CPU and heatsink/ cooler, Please refer to the documentation in the heatsink/ cooler package for more details about installation.


CPU & Heatsink Installation

Use appropriate ground straps, gloves and ESD mats to protect yourself from electrostatic discharge (ESD) while installing the processor.



/ Important


Images are for illustration purposes only; actual parts may vary.

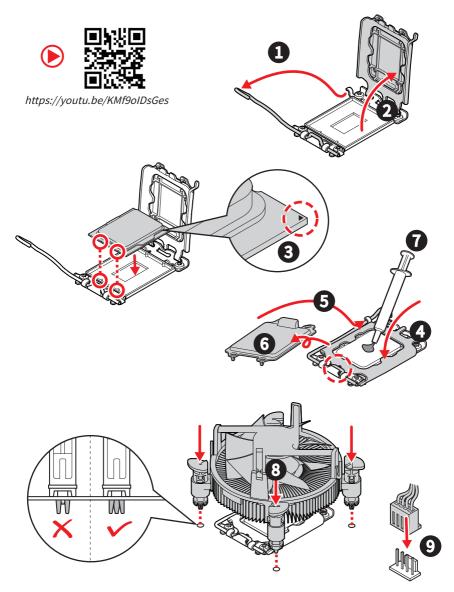


Memory Slots

DIMM1~2: DDR5 DIMM Slots

The DIMM slots are intended for memory modules.





Recommended Memory Population

Quantity of DIMMs		1		2		:	3	4
Channal A	DIMMA1				V		V	V
Channel A	DIMMA2	٧	V		V	V	V	V
Channel B	DIMMB1			V		V		V
	DIMMB2		V	V		V	V	V


**"V" indicates a populated DIMM slot. **



- Only support **UDIMM**.
- There should be at least 1 DDR5 DIMM populated.
- Paired memory installation for Max performance.
- If only 1 DIMM is populated in a channel, then populate it in the DIMMA2 slot.
- Populate the same DIMM type in each channel, specifically: 1. Use the same DIMM size; 2. Use the same number of ranks per DIMM.
- We don't suggest other memory installation.

Installing Memory Modules

- 1. Open the side clips to unlock the DIMM slot.
- 2. Insert the DIMM vertically into the slot, ensuring that the off-center notch at the bottom aligns with the slot.
- 3. Push the DIMM firmly into the slot until it clicks and the side clips automatically close.
- **4.** Verify that the side clips have securely locked the DIMM in place.

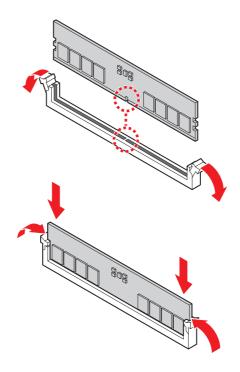





You can barely see the golden finger if the memory module is properly inserted in the DIMM slot.

Storage Connectors

SATA1_2, 3_4: SATA 3.0 6Gb/s Ports

These ports are SATA 6Gb/s interface port, it can connect to one SATA device.








Important

- These SATA connectors support hot plug.
- Please do not fold the SATA cable at a 90-degree angle. Data loss may result during transmission otherwise.
- SATA cables have identical plugs on either sides of the cable. However, it is recommended that the flat connector be connected to the motherboard for space saving purposes.

Expansion Slots

PCIe Slots

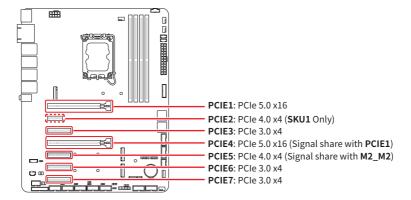

PCIE1~7: PCIe Expansion Slots


The PCI Express (Peripheral Component Interconnect Express) slots support PCIe interface expansion cards.



Important

- PCIE1 and PCIE4 are designated for discrete graphics and storage devices.
- When the **PCIE1** slot is occupied, it will operate at 5.0 x16 speed, while the **PCIE4** slot will not be available. Both **PCIE1,4** slots will run at 5.0 x8 speed when occupied.
- It is necessary to **remove the M.2 screw** when installing a PCIe x8 or x16 card in PCIE5.
- When adding or removing expansion cards, make sure that you unplug the power supply first. Meanwhile, read the documentation for the expansion card to configure any necessary hardware or software settings for the expansion card, such as jumpers, switches or BIOS configuration.

M.2 Slots

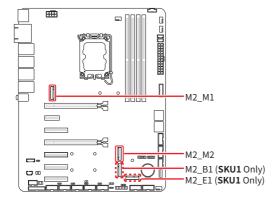


M2_M1: M.2 Slot (M Key, PCIe 4.0 x4, 2280/22110)

M2_M2: M.2 Slot (M Key, PCIe 4.0 x4/x2/x1, 2242/ 2280)

Please install the M.2 solid-state drive (SSD) into the M.2 slot as shown below.

- 1. Loosen the M.2 riser screw from the motherboard.
- 2. Move and fasten the M.2 riser screw to the appropriate location according your M.2 SSD size.
- 3. Insert your M.2 SSD into the M.2 slot at a 30-degree angle.
- 4. Secure the M.2 SSD in place with the supplied M.2 screw.

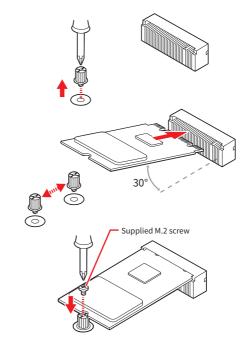




Important

The M2_M1, M2_M2 slots supports B+M Key module.

M2_E1: M.2 Slot (E Key, 2230) (SKU1 Only)

Please install the Wi-Fi/ Bluetooth card into the M.2 slot as shown below.

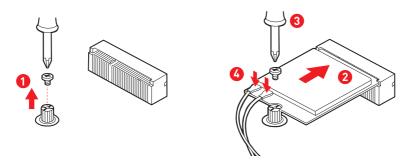


Feature

- Supports PCIe x1 signal.
- Supports Intel® AX210 Wi-Fi 6E, Intel® Wireless-AC 9260. CNVI devices are not supported.

M2_B1: M.2 Slot (B Key, 2242/ 2280) (SKU1 Only)

Please install the WWAN Card/ solid-state drive (SSD) into the M.2 slot as shown below.

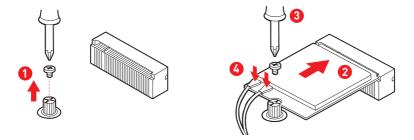

Feature


- Supports PCIe 3.0 x1 signal.
- Supports Innodisk devices: EGP2-X401-W1, EGPL-G202-W1, EGPL-G2S1.
- Supports PCIe 3.0 x2 NVMe SSD



Important


The HDD LED cannot be enabled when installing PCIe 3.0 x2 NVMe SSD in M2_B1.

Power Connectors

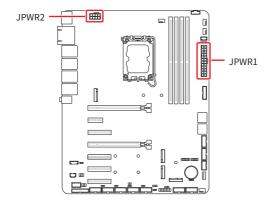


JPWR1: 24-Pin ATX Power Connector

This connector allows you to connect an ATX power supply.

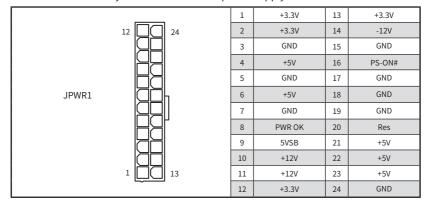

JPWR2: 8-Pin ATX 12V Power Connector

This connector allows you to connect an ATX power supply.






Important

Make sure that all the power cables are securely connected to a proper power supply to ensure stable operation of the system.

Cooling Connectors

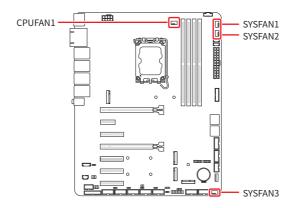

CPUFAN1, SYSFAN1~3: CPU/ System Fan Connectors

The fan connector supports CPU/ system cooling fans with +12V. When connecting the wire to the connectors, always note that the red wire is the positive and should be connected to the +12V; the black wire is Ground and should be connected to GND.


CPUFAN1	1	GND	2	FAN POWER
SYSFAN1~3 4 •••• 1	3	FAN SENSE	4	FAN_PWM



🚹 Important


Please refer to the recommended CPU fans at processor's official website or consult the vendors for proper CPU cooling fan.

Audio Connectors




JAUD1: Front Audio Header (Line-out/MIC-in)

This header allows you to connect front panel audio.

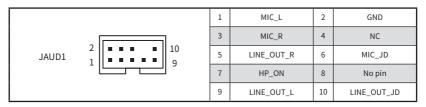


JSPDIF1: S/PDIF Header

This pinheader is used to connect S/PDIF (Sony & Philips Digital Interconnect Format) interface for digital audio transmission.




USB Connectors




JUSB2: USB 5Gbps Header

This port is backward-compatible with USB 2.0 devices and supports data transfer rate up to 5 Gbps.

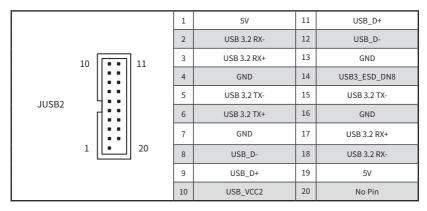


JUSB1: USB 2.0 Header

This header is ideal for connecting USB devices such as keyboard, mouse, or other USB-compatible devices. It supports data transfer rate up to 480 Mbps.

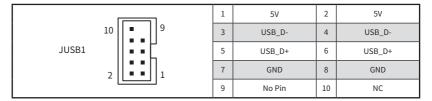

USB1: USB 2.0 Type-A Port

The USB (Universal Serial Bus) port is for attaching USB devices such as keyboard, mouse, or other USB-compatible devices. It supports data transfer rate up to 480 Mbps.



Other Connectors and Components

JFP1: Front Panel Header

This front-panel header is provided for electrical connection to the front panel switches & LEDs and is compliant with Intel Front Panel I/O Connectivity Design Guide.

		1	HDD LED+	2	POWER LED
	9	3	HDD LED-	4	POWER LED
JFP1		5	RESET SWITCH-	6	POWER SWITCH+
2 1	7	RESET SWITCH+	8	POWER SWITCH-	
	9	NC	10	No pin	

JGPIO1: GPI Header


This header is provided for the General-Purpose Input (GPI) peripheral module.

		1	GND	2	N_GPIO_VCC (VCC5)
JGPI01 2 10 1 9	3	N_GPI0	4	N_GPI4	
	5	N_GPI1	6	N_GPI5	
	7	N_GPI2	8	N_GPI6	
	9	N_GPI3	10	N_GPI7	

JGPIO2: GPO Header


This header is provided for the General-Purpose Output (GPO) peripheral module.






JPMBUS1: PMBus Header

Power Management Bus (PMBus) is a variant of the System Management Bus (SMBus) which is targeted at digital management of power supplies.

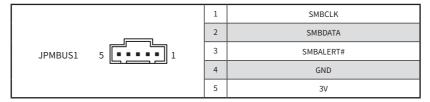


JSMB1: I2C Header


This header is provided for users to connect I²C (Inter-Integrated Circuit) interface.



JI2C1: SMBus Header


This header is provided for users to connect to System Management Bus (SMBus) interface.






COM2~6: Serial Port Headers

These headers are 16550A high speed communications port that sends/receives 16 bytes FIFOs. You can attach a serial device to it.

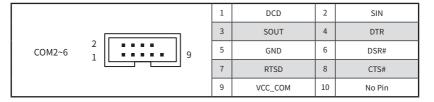

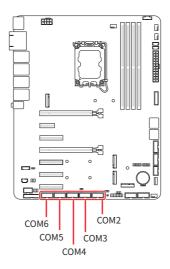



Important

After connect Serial port connectors to printer, garbage can't be printed when power on/off.

Feature

- Supports True RS-232
- Supports TTL RS-232
- Supports Auto flow control
- RS- 422/ 485 support TR 1000+ Meter

SKU1 (Intel® R680E)

COM2

Supports RS-232/422/485, With Ring/0V/5V/12V (Default set to Ring).

• COM3~6

Supports RS-232/422/485, With 5V/12V (Default set to 5V).

SKU2 (Intel® Q670E)

COM2

Supports RS-232/422/485, With Ring/0V/5V/12V (Default set to Ring).

• COM3~6

Supports RS-232, With 5V/12V (Default set to 5V)


RS232				
PIN	SIGNAL	DESCRIPTION		
1	NDCD	Data Carrier Detect		
2	NSIN	Signal In		
3	NSOUT	Signal Out		
4	NDTR	Data Terminal Ready		
5	GND	Signal Ground		
6	NDSR	Data Set Ready		
7	NRTS	Request To Send		
8	NCTS	Clear To Send		
9	VCC_COM	VCC_COM		

	RS422				
PIN	SIGNAL	DESCRIPTION			
1	422 TXD-	Transmit Data, Negative			
2	422 TXD+	Transmit Data, Positive			
3	422 RXD+	Receive Data, Positive			
4	422 RXD-	Receive Data, Negative			
5	GND	Signal Ground			
6	NC	No Connection			
7	NC	No Connection			
8	NC	No Connection			
9	NC	No Connection			

RS485				
PIN	SIGNAL	DESCRIPTION		
1	TXD-	Transmit Data, Negative		
2	NC	No Connection		
3	TXD+	Transmit Data, Positive		
4	NC	No Connection		
5	GND	Signal Ground		
6	NC	No Connection		
7	NC	No Connection		
8	NC	No Connection		
9	NC	No Connection		


JLAN_LED: LAN LED Header


This header is provided for rear panel LAN LEDs.

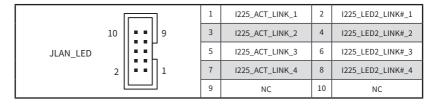

JKBMS1: PS/2[®] Keyboard & Mouse Connector


This connector is provided to connect a keyboard and a mouse.

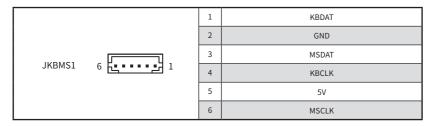

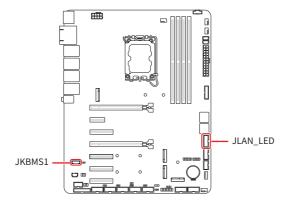

JCASE1: Chassis Intrusion Header


This connector connects to the chassis intrusion switch cable. If the chassis is opened, the chassis intrusion mechanism will be activated. The system will record this status and show a warning message on the screen. To clear the warning, you must enter the BIOS utility and clear the record.



JLPT1: Parallel Port Connector


The mainboard provides a 26-pin header for connection to an optional parallel port bracket. The parallel port is a standard printer port that supports Enhanced Parallel Port (EPP) and Extended Capabilities Parallel Port (ECP) mode.

	1	RSTB#	2	AFD#
	3	PRND0	4	ERR#
	5	PRND1	6	PINIT#
	7	PRND2	8	LPT_SLIN#
JLPT1	9	PRND3	10	GND
2 26	11	PRND4	12	GND
	13	PRND5	14	GND
	15	PRND6	16	GND
1 25	17	PRND7	18	GND
	19	ACK#	20	GND
	21	BUSY	22	GND
	23	PE	24	GND
	25	SLCT	26	NC

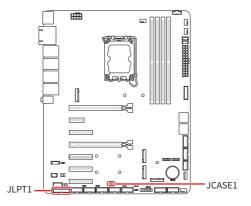

BAT1: CMOS Battery

If the CMOS battery is out of charge, the time in the BIOS will be reset and the data of system configuration will be lost. In this case, you need to replace the CMOS battery.



Replacing CMOS battery

- 1. Push the retainer clip to free the battery.
- 2. Remove the battery from the socket.
- 3. Install the new CR2032 coin-cell battery with the + sign facing up. Ensure that the retainer holds the battery securely.







WARNING

KEEP OUT OF REACH OF CHILDREN





- Swallowing can lead to chemical burns, perforation of soft tissue, can death.
- Severe burns can occur within 2 hours of ingestion.
- If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

Jumpers



Avoid adjusting jumpers when the system is on; it will damage the motherboard.



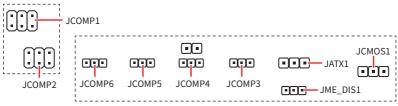

Jumper Name	Default Setting	Description	
JCOMP1~2	2 6 6 1 5	COM Voltage Select Jumper	
		1-2: 5V	
		3-4: 12V	
		5-6: NRI (Default)	
	1	COM Voltage Select Jumper	
JCOMP3~6		1-2: 5V	
		2-3: 12V	
	1	AT/ ATX Mode Select Jumper	
JATX1		1-2: ATX (Default)	
		2-3: AT	

Continued on next column

Jumper Name	Default Setting	Description
		ME Jumper
JME_DIS1	1 -	1-2: ME enabled (Default)
		2-3: ME disabled
		Clear CMOS Jumper
JCMOS1	1	1-2: Normal (Default)
		2-3: Clear CMOS

BIOS Setup

This chapter provides information on the BIOS Setup program and allows users to configure the system for optimal use.

Users may need to run the Setup program when:

- An error message appears on the screen at system startup and requests users to run SETUP.
- Users want to change the default settings for customized features.



// Important

- Please note that BIOS update assumes technician-level experience.
- As the system BIOS is under continuous update for better system performance, the illustrations in this chapter should be held for reference only.

Entering Setup

Power on the computer and the system will start POST (Power On Self Test) process. When the message below appears on the screen, press or <F2> key to enter Setup, <F11> key to Boot Menu, <F12> key to PXE Boot.

Press < DEL > or < F2 > to enter SETUP

If the message disappears before you respond and you still wish to enter Setup, restart the system by turning it **OFF** and **On** or pressing the **RESET** button. You may also restart the system by simultaneously pressing **<Ctrl>**, **<Alt>**, **and <Delete>** keys.



Important

The items under each BIOS category described in this chapter are under continuous update for better system performance. Therefore, the description may be slightly different from the latest BIOS and should be held for reference only.

Control Keys

←→	Select Screen		
↑ ↓	Select Item		
Enter	Select		
+-	Change Value		
Esc	Exit		
F1	General Help		
F7	Previous Values		
F9	Optimized Defaults		
F10	Save & Reset*		
F12	Screenshot capture		
<k></k>	Scroll help area upwards		
<m></m>	Scroll help area downwards		

^{*} When you press <F10>, a confirmation window appears and it provides the modification information. Select between Yes or No to confirm your choice.

Getting Help

Upon entering setup, you will see the Main Menu.

Main Menu

The main menu lists the setup functions you can make changes to. You can use the arrow keys (↑↓) to select the item. The on-line description of the highlighted setup function is displayed at the bottom of the screen.


Sub-Menu

If you find a right pointer symbol appears to the left of certain fields that means a sub-menu can be launched from this field. A sub-menu contains additional options for a field parameter. You can use **arrow keys** ($\uparrow \downarrow$) to highlight the field and press <Enter> to call up the sub-menu. Then you can use the control keys to enter values and move from field to field within a sub-menu. If you want to return to the main menu, just press the < Esc>.

General Help <F1>

The BIOS setup program provides a General Help screen. You can call up this screen from any menu by simply pressing <F1>. The Help screen lists the appropriate keys to use and the possible selections for the highlighted item. Press **<Esc>** to exit the Help screen.

The Menu Bar

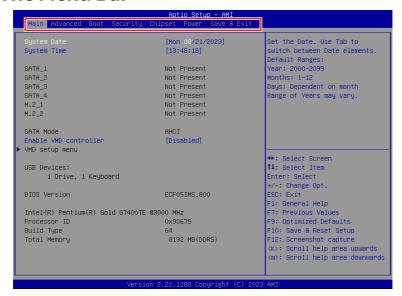

► Main

Use this menu for basic system configurations, such as time, date, etc.

Advanced

Use this menu to set up the items of special enhanced features.

► Boot

Use this menu to specify the priority of boot devices.

Security

Use this menu to set supervisor and user passwords.

Chipset

This menu controls the advanced features of the on-board chipsets.


➤ Power

Use this menu to specify your settings for power management.

► Save & Exit

This menu allows you to load the BIOS default values or factory default settings into the BIOS and exit the BIOS setup utility with or without changes.

Main

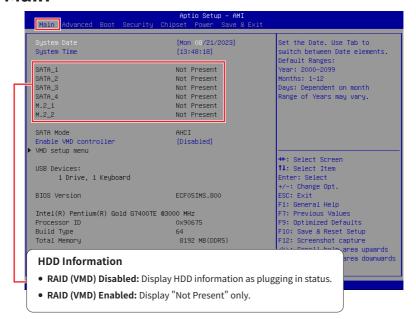

System Date

This setting allows you to set the system date.

Format: <Day> <Month> <Date> <Year>.

System Time

This setting allows you to set the system time.

Format: <Hour> <Minute> <Second>.

Enable VMD controler

Enables or disables VMD (RAID) controler.

Advanced



► Full Screen Logo Display

This BIOS feature determines if the BIOS should hide the normal POST messages with the motherboard or system manufacturer's full-screen logo.

BIOS will display the full-screen logo during the boot-up [Enabled]

sequence, hiding normal POST messages.

[Disabled] BIOS will display the normal POST messages, instead of the

full-screen logo.

Please note that enabling this BIOS feature often adds 2-3 seconds to the booting sequence. This delay ensures that the logo is displayed for a sufficient amount of time. Therefore, it is recommended to disable this BIOS feature for faster boot-up.


Bootup NumLock State

This setting is to set the state of the Num Lock key on the keyboard when the system is powered on.

[On] Turn on the Num Lock key when the system is powered on.

[Off] Allow users to use the arrow keys on the numeric keypad.

CPU Configuration

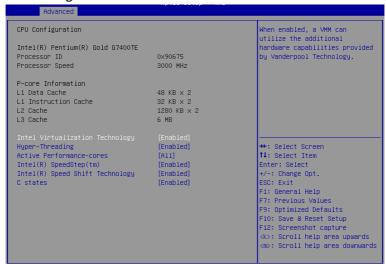

► Intel Virtualization Technology

Enables or disables Intel Virtualization technology.

Enables Intel Virtualization technology and allows a platform [Enabled] to run multiple operating systems in independent partitions.

The system can function as multiple systems virtually.

[Disabled] Disables this function.

Hyper-Threading (HT Function)

Enables or disables Intel Hyper-Threading technology.

The processor uses Hyper-Threading technology to improve utilization of the CPU resources and potentially increasing overall performance by allowing it to handle multiple threads simultaneously. If you disable the function, it will restricts the CPU to operate as a single-threaded processor, with only one logical core per physical core. Please disable this item if your operating system does not support HT Function or unreliability and instability may occur.

Active Performance-cores

Select the number of active Performance-cores (P-cores).

► Active Efficient-cores

Select the number of active Efficient-cores (E-cores).

▶ Intel(R) SpeedStep(TM)

Enhanced Intel SpeedStep® Technology enables the OS to control and activate performance states (P-States) of the processor.

[Enabled] When enabled, Intel SpeedStep® technology is activated.

> This technology allows the processor to manage its power consumption via performance state (P-State) transitions.

[Disabled] Disables this function.

► Intel(R) Speed Shift Technology

Intel® Speed Shift Technology is an energy-efficient method that allows frequency control by hardware rather than the OS.

When enabled, Intel® Speed Shift Technology is activated. [Enabled]

The technology enables the management of processor power consumption via hardware performance state (P-State)

transitions

Disable this function. [Disabled]

C States


This setting controls the C-States (CPU Power states).

[Enabled] Detects the idle state of system and reduce CPU power

consumption accordingly.

Disable this function. [Disabled]

Super IO Configuration

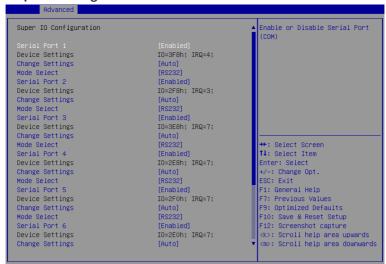

► Serial Port 1/2/3/4/5/6, Parallel Port

This setting enables or disables the specified serial port.

» Change Settings

This setting is used to change the address & IRQ settings of the specified serial port.

» Mode Select

Select an operation mode for Serial Port 1/2/3/4/5/6, Parallel Port.

► FIFO Mode

This setting controls the FIFO (First In First Out) data transfer mode.

► Shared IRQ Mode


This setting provides the system with the ability to share interrupts among its serial ports.

► Watch Dog Timer

You can enable the system watchdog timer, a hardware timer that generates a reset when the software that it monitors does not respond as expected each time the watchdog polls it.

H/W Monitor (PC Health Status)

These items display the current status of all monitored hardware devices/ components such as voltages, temperatures and all fans' speeds.

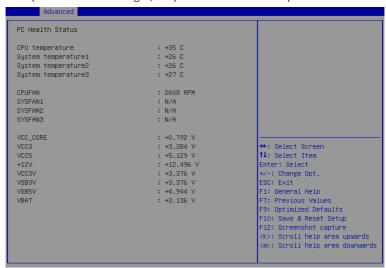

Smart Fan Configuration



► CPUFAN/ SYSFAN1~3

This setting enables or disables the Smart Fan function. Smart Fan is an excellent feature which will adjust the CPU/system fan speed automatically depending on the current CPU/system temperature, avoiding the overheating to damage your system. The following item will display when CPUFAN/ SYSFAN1~3 is enabled.

» Min. Speed (%)

The beginning speed of the System fan.

PCI/PCIE Device Configuration



► Audio Controller

This setting enables or disables the detection of the onboard audio controller.

Network Stack Configuration

This menu provides Network Stack settings for users to enable network boot (PXE) from BIOS.



Network Stack

This menu provides Network Stack settings for users to enable network boot (PXE) from BIOS. The following items will display when **Network Stak** is enabled.

» IPV4 PXE Support

Enables or disables IPv4 PXE boot support.

» IPV4 HTTP Support

Enables or disables Ipv4 HTTP Support.

» IPV6 PXE Support

Enables or disables Ipv6 PXE Support.

» IPV6 HTTP Support

Enables or disables Ipv6 HTTP Support.


» PXE boot wait time

Use this option to specify the wait time to press the ESC key to abort the PXE boot. Press "+" or "-" on your keyboard to change the value. The default setting is 0.

» Media detect count

Use this option to specify the number of times media will be checked. Press "+" or "-" on your keyboard to change the value. The default setting is 1.

GPIO Group Configuration

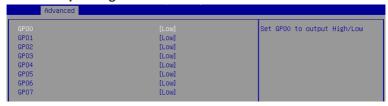


► GPO0 ~ GPO7

These settings control the operation mode of the specified GPIO.

► PCIE ASPM settings

This menu provide settings for PCIe ASPM (Active State Power Management) level for different installed devices.

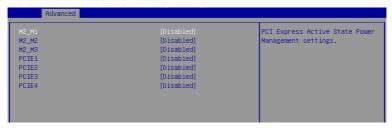

► M2_M1~3/ PCIE1~4

Sets PCI Express ASPM (Active State Power Management) state for power saving.


Boot



► Boot Option #1-2

This setting allows users to set the sequence of boot devices where BIOS attempts to load the disk operating system.

Security

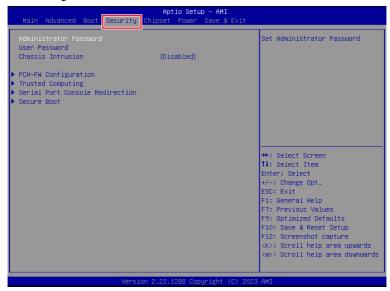

Administrator Password

Administrator Password controls access to the BIOS Setup utility.

User Password

User Password controls access to the system at boot and to the BIOS Setup utility.


► Chassis Intrusion

Enables or disables recording messages while the chassis is opened. This function is ready for the chassis equips a chassis intrusion jumper(switch).

[Enabled]	Once the chassis is opened , the system will record and issue a warning message. A beep sound will be emitted before this function is reset.
[Disabled]	Once the chassis is closed , the system will record and issue a warning message.
[Reset]	Clear the warning message. After clearing the message, please return to Enabled or Disabled.

PCH-FW Configuration

This menu allows you to configure settings related to the PCH firmware.

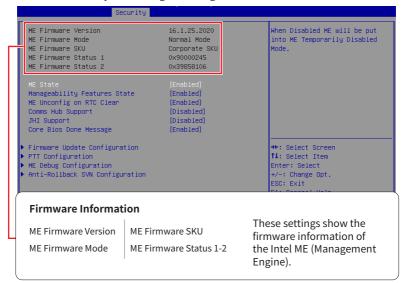

▶ ME State

This menu controls the Intel® Management Engine State (ME state) parameters, which provides various management and security capabilities. The following items will display when ME State is enabled.

► Manageability Feature State

Enables or disables Manageability Feature State. Enabling this item for remote management capabilities.

► ME Unconfig on RTC Clear

Enables or disables ME Unconfig on RTC Clear. Enabling this item resets the ME configuration to its default state, removing any customizations or settings applied.

► Comms Hub Support

Enables or disables the communications hub support.

▶ JHI Support

Enables or disables JHI Support. JHI stands for Intel® Dynamic Application Loader Host Interface Service (Intel® DAL HIS) and is the engineering name for this feature. Enabling JHI Support in the BIOS settings allows the system to utilize this interface for communication between trusted applications and host-based applications.

► Core BIOS Done Message

Enables or disables Core BIOS Done Message sent to ME.

► Firmware Update Configuration



» ME FW Image Re-Flash

Enables or disables the ME Firmware Image Re-flashing.

» FW Update

Enables or disables the capability to perform a firmware update of the ME locally.

► PTT Configuration

Intel® Platform Trust Technology (PTT) is a platform functionality for credential storage and key management used by Microsoft Windows.



» TPM Device Selection

Select TPM (Trusted Platform Module) devices from PTT or dTPM (Discrete TPM).


[PTT] Enables PTT in SkuMgr.

[dTPM] Disables PTT in SkuMgr. Warning! PTT/ dTPM will be disabled and all

data saved on it will be lost.

▶ ME Debug Configuration

This menu allows you to configure debug-related options for the Intel® Management Engine (ME).

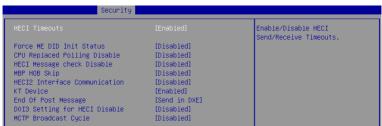

» HECI Timeouts

This setting enables/ disables the HECI (Host Embedded Controller Interface) send/ receive timeouts.

» Force ME DID Init Status

Forces the ME Device ID (DID) initialization status value.

» CPU Replaced Polling Disable

Setting this option disables the CPU replacement polling loop.

» HECI Message Check Disable

This setting disables message check for BIOS boot path when sending messages.

» MBP HOB Skip

Setting this option will skip ME's Memory-Based Protection (MBP) H0B region.

» HECI2 Interface Communication

This setting Adds/ Removes HECI2 device from PCI space.

» KT Device

Enables or disables Key Transfer (KT) Device.

» End of Post Message

Enables or disables End of Post Message sent to ME.

» DOI3 Setting for HECI Disable

Setting this option disables setting DOI3 bit for all HECI devices.

» MCTP Broadcast Cycle

Enables or disables Management Component Transport Protocol (MCTP) Broadcast Cycle.

Anti-Rollback SVN Configuration



» Automatic HW-Enforced Anti-Rollback SVN

Setting this item enables will automatically activate the hardware-enforced anti-rollback protection based on the Secure Version Number (SVN). Once enabled, the hardware will enforce that only firmware updates with an SVN equal to or higher than the current SVN can be installed.

» Set HW-Enforced Anti-Rollback for Current SVN

Fnable HW FRB mechanism for current ARB SVN value, FW with lower ARB-SVN will be blocked from execution. The value will be restored to disable after the command is sent. This item will display when Automatic HW-Enforced Anti-Rollback SVN is enabled.

Trusted Computing



Security Device Support

This item enables or disables BIOS support for security device. When set to [Disable], the OS will not show security device.

► SHA256, 384 PCR Bank

These settings enables or disables the SHA-1 PCR Bank and SHA256, 384 PCR Bank.

► Pending Operation

When Security Device Support is set to [Enable], Pending Operation will appear. It is advised that users should routinely back up their TPM secured data.

Clear all data secured by TPM. [TPM Clear]

Discard the se lection. [None]

► Platform Hierarchy, Storage Hierarchy, Endorsement Hierarchy

These settings enables or disables the Platform Hierarchy, Storage Hierarchy and Endorsement Hierarchy.

Physical Presence Spec Version

This settings show the Physical Presence Spec Version.

► TPM 2.0 Interface Type

This setting shows the TPM 2.0 Interface Type.

► PH Randomization

Enables or disables Platform Hierarchy (PH) Randomization.

▶ Device Select

Select your TPM device through this setting.

Serial Port Console Redirection



► Console Redirection

Console Redirection operates in host systems that do not have a monitor and keyboard attached. This setting enables or disables the operation of console redirection. When set to [Enabled], BIOS redirects and sends all contents that should be displayed on the screen to the serial COM port for display on the terminal screen. Besides, all data received from the serial port is interpreted as keystrokes from a local keyboard.

► Console Redirection Settings (COM1)

This option appears when Console Redirection is **enabled**.

» Terminal Type

To operate the system's console redirection, you need a terminal supporting ANSI terminal protocol and a RS-232 null modem cable connected between the host system and terminal(s). You can select emulation for the terminal from this setting.

Extended ASCII character set. [ANSI]

[VT100] ASCII character set.

[VT100Plus] Extends VT100 to support color, function keys, etc.

[VT-UTF8] Uses UTF8 encoding to map Unicode characters onto one or more bytes.

» Bits per second, Data Bits, Parity, Stop Bits

These setting specifies the transfer rate (bits per second, data bits, parity, stop bits) of Console Redirection.

» Flow Control

Flow control is the process of managing the rate of data transmission between two nodes. It's the process of adjusting the flow of data from one device to another to ensure that the receiving device can handle all of the incoming data. This is particularly important where the sending device is capable of sending data much faster than the receiving device can receive it.

» VT-UTF8 Combo Key Support

This setting enables or disables the VT-UTF8 combination key support for ANSI/VT100 terminals.

» Recorder Mode, Resolution 100x31

These settings enables or disables the recorder mode and the resolution 100x31.

» Putty KeyPad

PuTTY is a terminal emulator for Windows. This setting controls the numeric keypad for use in PuTTY.

Secure Boot



► Secure Boot

Secure Boot function can be enabled only when the Platform Key (PK) is enrolled and running accordingly.

► Secure Boot Mode

Selects the secure boot mode. This item appears when **Secure Boot** is enabled.

[Standard] The system will automatically load the secure keys from BIOS.

[Custom] Allows user to configure the secure boot settings and manually load the secure keys.


► Restore Factory Keys

Allows you to restore all factory default keys. The settings will be applied after reboot or at the next reboot. This item appears when "Secure Boot Mode" sets to [Custom].

► Reset to setup Mode

Allows you to delete all the Secure Boot keys (PK,KEK,db,dbt,dbx). The settings will be applied after reboot or at the next reboot. This item appears when "Secure Boot Mode" sets to [Custom].


Chipset

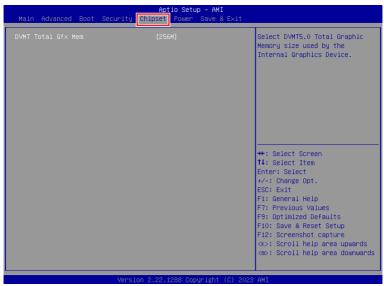

► DVMT Total Gfx Mem

This setting specifies the total graphics memory size for Dynamic Video Memory Technology (DVMT).

Power

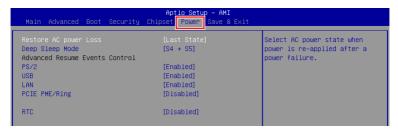

Restore AC Power Loss

This setting specifies whether your system will reboot after a power failure or interrupt occurs. Available settings are:

[Power Off] Leaves the computer in the power off state. [Power On] Leaves the computer in the power on state.

[Last State] Restores the system to the previous status before power failure

or interrupt occurred.

Deep Sleep Mode

The setting enables or disables the Deep S5 power saving mode. S5 is almost the same as G3 Mechanical Off, except that the PSU still supplies power, at a minimum, to the power button to allow return to S0. A full reboot is required. No previous content is retained. Other components may remain powered so the computer can "wake" on input from the keyboard, clock, modem, LAN, or USB device.

OnChip USB

The item allows the activity of the OnChip USB device to wake up the system from S4/S5 sleep state.

► LAN

Enables or disables the system to be awakened from the power saving modes when activity or input signal of Intel LAN device is detected.

► PCIE PME/Ring

Enables or disables the system to be awakened from power saving modes when activity or input signal of onboard PCIE PME/Ring is detected.

► RTC

When [Enabled], your can set the date and time at which the RTC (real-time clock) alarm awakens the system from suspend mode.

Save & Exit



► Save Changes and Reset

Save changes to CMOS and reset the system.

Discard Changes and Exit

Abandon all changes and exit the Setup Utility.

Discard Changes

Abandon all changes.

► Load Optimized Defaults

Use this menu to load the default values set by the motherboard manufacturer specifically for optimal performance of the motherboard.

Save as User Defaults

Save changes as the user's default profile.

Restore User Defaults

Restore the user's default profile.

Launch EFI Shell from filesystem device

This setting helps to launch the EFI Shell application from one of the available file system devices.

GPIO WDT BKL Programming

This chapter provides WDT (Watch Dog Timer), GPIO (General Purpose Input/Output) and LVDS Backlight programming guide.

Abstract

In this section, code examples based on C programming language provided for customer interest. Inportb, Outportb, Inportl and Outportl are basic functions used for access IO ports and defined as following.

Inportb: Read a single 8-bit I/O port.

Outportb: Write a single byte to an 8-bit port.

Inportl: Reads a single 32-bit I/O port.

Outportl: Write a single long to a 32-bit port.

General Purpose IO

1. General Purposed IO - GPIO/DIO

The GPIO port configuration addresses are listed in the following table:

Name	IO Port	IO address	Name	IO Port	IO address
N_GPI0	0x12	Bit 0	N_GPO0	0x21	Bit 0
N_GPI1	0x12	Bit 1	N_GPO1	0x21	Bit 1
N_GPI2	0x12	Bit 2	N_GPO2	0x21	Bit 2
N_GPI3	0x42	Bit 3	N_GPO3	0x21	Bit 3
N_GPI4	0x12	Bit 4	N_GPO4	0x21	Bit 4
N_GPI5	0x12	Bit 5	N_GPO5	0x21	Bit 5
N_GPI6	0x12	Bit 6	N_GP06	0x21	Bit 6
N_GPI7	0x12	Bit 7	N_GP07	0x21	Bit 7

Note: GPIO should be accessed through controller device 0x6E on SMBus.

The associated access method in examples (SMBus_ReadByte, SMBus_WriteByte) are provided in part 3.

1.1 Set output value of GPO

- 1. Read the value from GPO port.
- 2. Set the value of GPO address.
- 3. Write the value back to GPO port.

```
Example: Set N GPO0 output "high"
    val =SMBus_ReadByte (0x6E, 0x21); // Read value from N_GPO0 port through SMBus.
    val = val | (1 << 0);
                                       // Set N GPO0address (bit 0) to 1 (output "high").
    SMBus_WriteByte (0x6E, 0x21, val); // Write back to N_GPO0 port through SMBus.
Example: Set N_GPO1 output "low"
    val = SMBus ReadByte (0x6E, 0x21); // Read value from N_GPO1 port through SMBus..
    val = val & (~(1 << 1));
                                       // Set N GPO1 address (bit 1) to 0 (output "low").
    SMBus_WriteByte (0x6E, 0x21, val); // Write back to N_GPO1 port through SMBus.
```

1.2 Read input value from GPI:

- 1. Read the value from GPI port.
- 2. Get the value of GPI address.

Example: Get N_GPI2 input value.

```
val = SMBus ReadByte (0x6E, 0x12); // Read value from N_GPI2 port through SMBus.
val = val & (1<<2);
                                   // Read N_GPI2 address (bit 2).
          printf ("Input of N_GPI2 is High");
if (val)
          printf ("Input of N_GPI2 is Low");
else
```

Example: Get N_GPI3 input value.

```
val = SMBus_ReadByte (0x6E, 0x42); // Read value from N_GPI3 port through SMBus.
val = val & (1 << 3);
                                   // Read N_GPI3 address (bit 3).
if (val)
        printf ("Input of N_GPI3 is High");
else
          printf ("Input of N_GPI3 is Low");
```

Watchdog Timer

2. Watchdog Timer - WDT

The base address (WDT BASE) of WDT configuration registers is 0xA10.

2.1 **Set WDT Time Unit**

```
val = Inportb (WDT BASE + 0x05);
                                         // Read current WDT setting
val = val \mid 0x08;
                                         // minute mode. val = val & 0xF7 if second mode
Outportb (WDT_BASE + 0x05, val);
                                         // Write back WDT setting
```

2.2 **Set WDT Time**

```
Outportb (WDT BASE + 0x06, Time);
                                      // Write WDT time, value 1 to 255.
```

2.3 **Enable WDT**

```
val = Inportb (WDT BASE + 0x0A);
                                        // Read current WDT PME setting
val = val \mid 0x01;
                                        // Enable WDT OUT: WDOUT_EN (bit 0) set to 1.
Outportb (WDT_BASE + 0x0A, val);
                                        // Write back WDT setting.
val = Inportb (WDT_BASE + 0x05);
                                        // Read current WDT setting
val = val | 0x20;
                                        // Enable WDT by set WD_EN (bit 5) to 1.
Outportb (WDT_BASE + 0x05, val);
                                        // Write back WDT setting.
```

2.4 Disable WDT

```
val = Inportb (WDT_BASE + 0x05);
                                        // Read current WDT setting
val = val & 0xDF;
                                        // Disable WDT by set WD_EN (bit 5) to 0.
Outportb (WDT_BASE + 0x05, val);
                                        // Write back WDT setting.
```

2.5 **Check WDT Reset Flag**

If the system has been reset by WDT function, this flag will set to 1.

```
val = Inportb (WDT_BASE + 0x05);
                                 // Read current WDT setting.
val = val & 0x40;
                                       // Check WDTMOUT_STS (bit 6).
if (val) printf ("timeout event occurred");
else
         printf ("timeout event not occurred");
```

2.6 **Clear WDT Reset Flag**

```
val = Inportb (WDT_BASE + 0x05);
                                     // Read current WDT setting
val = val | 0x40;
                                       // Set 1 to WDTMOUT STS (bit 6);
Outportb (WDT_BASE + 0x05, val);
                                      // Write back WDT setting
```

SMBus Access

3. SMBus Access

The base address of SMBus must know before access.

The relevant bus and device information are as following.

```
#define IO SC
                    0xCF8
#define IO DA
                    0xCFC
#define PCIBASEADDRESS 0x80000000
#define PCI_BUS_NUM
#define PCI DEV NUM 31
#define PCI FUN NUM
                   4
```

3.1 Get SMBus Base Address

```
int SMBUS BASE;
int DATA_ADDR = PCIBASEADDRESS + (PCI_BUS_NUM<<16) +
                                 (PCI DEV NUM<<11) +
                                 (PCI FUN NUM<<8);
Outportl (DATA ADDR + 0x20, IO SC);
SMBUS_BASE = InportI (IO_DA) & 0xfffffff0;
```

3.2 SMBus ReadByte (char DEVID, char offset)

Read the value of OFFSET from SMBus device DEVID.

```
Outportb (LOWORD (SMBUS BASE), 0xFE);
Outportb (LOWORD (SMBUS BASE) + 0x04, DEVID + 1); //out Base + 04, (DEVID + 1)
Outportb (LOWORD (SMBUS_BASE) + 0x03, OFFSET); //out Base + 03, OFFSET
Outportb (LOWORD (SMBUS_BASE) + 0x02, 0x48); //out Base + 02, 48H
mdelay (20);
                                                //delay 20ms to let data ready
while ((Inportl (SMBUS BASE) & 0x01) != 0);
                                                //wait SMBus ready
SMB DATA = Inportb (LOWORD (SMBUS BASE) + 0x05); //input Base + 05
```

3.3 SMBus_WriteByte (char DEVID, char offset, char DATA)

Write <u>DATA</u> to <u>OFFSET</u> on SMBus device <u>DEVID</u>.

```
Outportb (LOWORD (SMBUS_BASE), 0xFE);
Outportb (LOWORD (SMBUS BASE) + 0x04, DEVID); //out Base + 04, (DEVID)
Outportb (LOWORD (SMBUS_BASE) + 0x03, OFFSET); //out Base + 03, OFFSET
Outportb (LOWORD (SMBUS_BASE) + 0x05, DATA);
                                                //out Base + 05, DATA
Outportb (LOWORD (SMBUS BASE) + 0x02, 0x48);
                                                //out Base + 02, 48H
mdelay (20);
                                                //wait 20ms
```