



SATA Slim 3SE3


HIGHLIGHT FEATURES

- SATA III solution for industrial field
- iSMART disk health monitoring
- Intelligent error recovery system
- Excellent data transfer speed
- Compatible with JEDEC MO-297 standard
- Supports wide temperature from -40°C to 85°C

SPECIFICATIONS

Model Name	SATA Slim 3SE3
Flash Type	SLC
Interface	SATA III 6.0 Gb/s
Form Factor	MO-297
Capacity	8GB ~ 128GB
Sequential R / W (MB/sec, max.)	370 / 220
P/E Cycle	60,000
TBW (Max.)	750
Storage Temperature	-55°C ~ 95°C
Max. Power Consumption	2W
Max. Channels	4
External DRAM Buffer	N
H/W Write Protect	N
S.M.A.R.T.	Y
AES	N
TCG Opal	N
Dimension (W x L x H/mm)	54.0 x 39.0 x 4.0
Vibration	20G@[7 ~ 2000Hz]
Shock	1500G@0.5ms
MTBF	>3 million hours
Warranty	5 Years

DIAGRAM

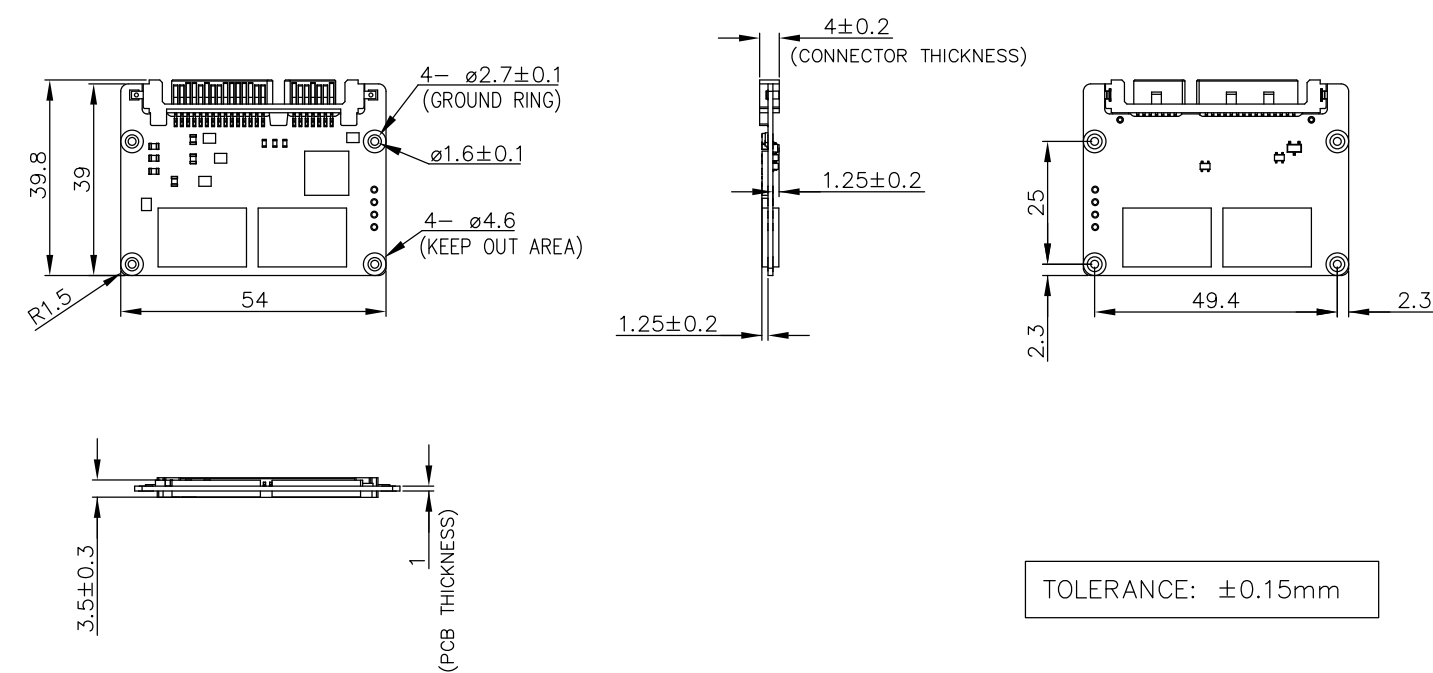

ORDER INFO.

Operating Temperature	Standard Grade (0°C ~ 70°C)	Industrial Grade (-40°C ~ 85°C)
8GB	DESLM-08GD08SCAQB	DESLM-08GD08SWAQB
16GB	DESLM-16GD08SCAQB	DESLM-16GD08SWAQB
32GB	DESLM-32GD08SCAQB	DESLM-32GD08SWAQB
64GB	DESLM-64GD08SCAQB	DESLM-64GD08SWAQB
128GB	DESLM-A28D08SCAQB	DESLM-A28D08SWAQB

HQ (Taiwan) T +886-2-7703-3000 / E sales@innodisk.com

CN T +86-755-2167-3689 / E sales_cn@innodisk.com

US T +1-510-770-9421 / E usasales@innodisk.com

EU T +31-40-3045-400 / E eusales@innodisk.com

JP T +81-3-6667-0161 / E jp_sales@innodisk.com

