

## 10.1" Android 11 Vehicle Mount Computer with RK3399 Processor

### Overview

The VT-760A is a rugged 10.1-inch Android-based vehicle mount computer specifically designed for trucks, buses, forklifts, and various other applications. The VT-760A features a high-performance 6-core processor, an integrated 10.1-inch TFT LCD display with a projective capacitive touchscreen for enhanced usability. It also comes with built-in Wi-Fi 5, Bluetooth 4.2, 4G LTE/5G, and GNSS modules, enabling seamless real-time communication connections. The VT-760A boasts a fanless design, ensuring efficient cooling, and supports a wide temperature range and wide-range DC input. It is MIL-STD compliant and IP65 waterproof and dustproof, allowing it to withstand harsh operating conditions.

### Features

- 10.1" TFT-LCD with projective capacitive touch screen
- Front panel integrated with function key control
- Rugged aluminum enclosure and fanless design
- IP65 protection against water and dust
- Compliant with MIL-STD-810G vibration testing standards
- Wide range 8-36VDC power input with ignition control
- Flexible expansion capability for Wi-Fi 5, Bluetooth 4.2, LTE/5G, GNSS




### I/O Interfaces



## Specifications

<b>Display</b>	
Size	10.1 inch (16:10)
Touch Type	Projected capacitive multi touch
Display Type	TFT LCD
Resolution	1280 x 800
Luminance	400 nits
Contrast Ratio	900: 1
View Angles	85 (left), 85 (right), 85 (up), 85 (down)
Color	16.7M
<b>System</b>	
CPU	Rockchip RK3399, dual core A72 + quad core A53 (1.8 GHz)
Memory	4GB DDR4-1866 on board
Storage	32GB EMMC on board
<b>Keypad &amp; Keyboard</b>	
Keypad	Power On/Off Brightness adjustment F1-F6 user-defined function keys Power LED indicator
<b>I/O Ports</b>	
USB	1x USB 3.0/OTG (Type A), 1x USB 2.0 (Type A)
Serial	1x RS-232 (DB9)
Ethernet	1x GbE LAN (RJ45)
SIM Card Slot	1x Nano SIM Socket
TF Card Slot	1x TF Socket (up to 128GB)
Antenna	2 to 4x TNC connector for external antenna (Wi-Fi, Bluetooth, WWAN, GNSS)
<b>RF Communication</b>	
Wi-Fi	Wi-Fi 5: 802.11a/b/g/n/ac, 2.4G/5G
Cellular	4G, LTE 5G, NSA/SA (optional)
Bluetooth	Bluetooth 4.2
GNSS	GPS, GLONASS, Galileo, BeiDou
<b>Audio</b>	
Speaker	8Ω/2W, dual studio speakers
<b>Power</b>	
DC Input	8 to 36VDC
Power Consumption	14W (Typ.)
Power Mode	ATX (default), AT
<b>Operating System</b>	
Android	Android 11
<b>Mechanical</b>	
Dimensions (W x D x H)	280 x 210 x 47.5 mm (11.02 x 8.27 x 1.87 inches)
Weight (N.W.)	2.2 kg (4.85 lbs)
Mounting Mode	VESA 75 and 100
Material	Die-casting Aluminum with Heavy Duty Metal
<b>Environment</b>	
Operating Temperature	-20 to 60°C (-4 to 140°F)
Storage Temperature	-40 to 70°C (-40 to 158°F)
Relative Humidity	95% @ 70°C (158°F), non-condensing
Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I
IP Rating	IP65 compliant (I/O interface must be closed)
<b>Certification</b>	
EMC	CE, FCC

## Dimensions

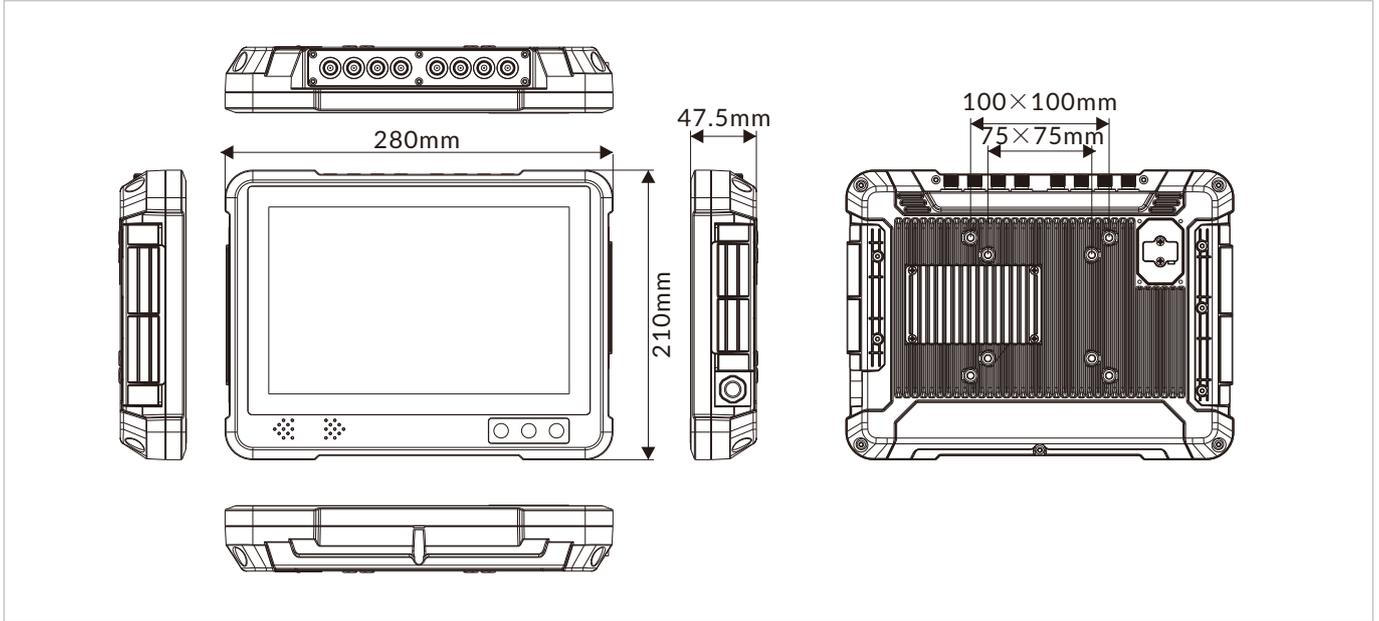

## Optional Accessories

Part No.	Description
PWR836D512-M12	8 to 36VDC Input, 5V/12VDC Output, M12 connector

## Ordering Information

Part No.	Description
VT-760A-B602I-A011	VT-760A with Rockchip RK3399, 4GB RAM, 32GB SSD, WiFi(6202), Bluetooth(6202), 5G(RM500QL), GPS(UG-M80), Android 11, TNC(L)-WiFi_M, Orange cap-Bluetooth/5G, TNC(R)-GPS
VT-760A-B412A-A011	VT-760A with Rockchip RK3399, 4GB RAM, 32GB SSD, WiFi(6202), Bluetooth(6202), 4G(EC20), GPS(UG-M80), Android 11, TNC(L)-WiFi_M, Orange cap-Bluetooth/4G_M, TNC(R)-GPS