


MS-CF02

Mini-ITX with 14th/13th/12th Gen Intel® Raptor Lake-S Refresh/Raptor Lake-S/Alder Lake-S, Core™ i9/i7/i5/i3, Pentium®, Celeron® Processor & Intel® R680E/Q670E/H610E for High-Performance Solution

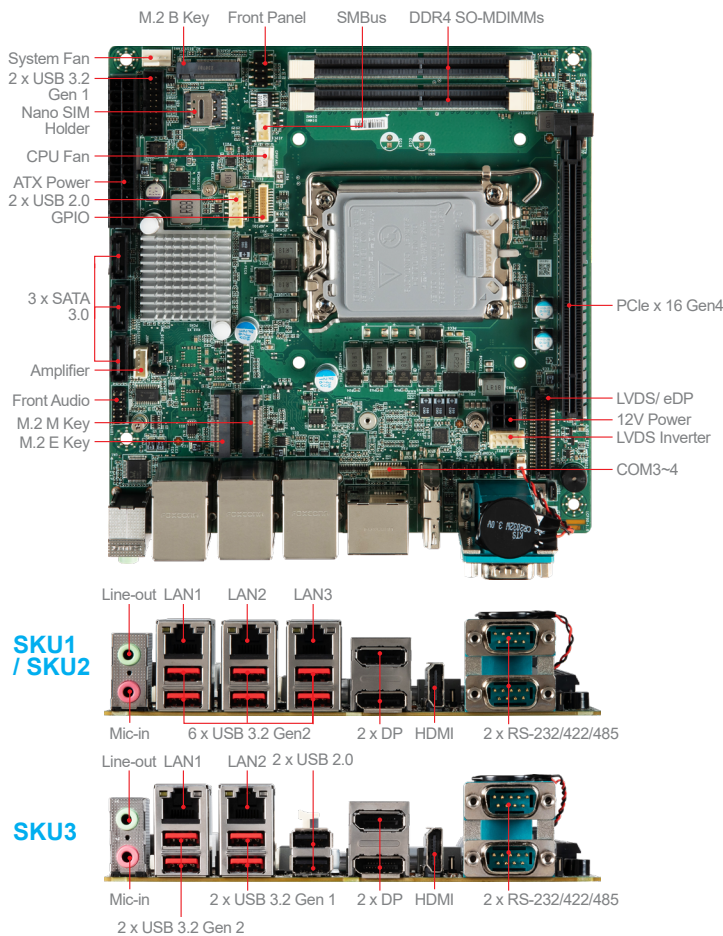

SKU1 / SKU2

SKU3

Features

- Intel® 14th/13th/12th Gen Raptor Lake-S Refresh/Raptor Lake-S/Alder Lake-S Series with R680E/Q670E/H610E
- 2 DDR4 3200 MT/s ECC/non-ECC SODIMM slots up to 64GB
- Quadruple independent displays: 2DP, HDMI, LVDS/eDP
- 3/2 2.5GbE LAN with RJ-45
- 1 PCIe x16 (Gen 4) Slot, 1 M.2 E key (with CNVi), 1 M.2 B key (with SIM Holder) slots
- M.2 M key, 3 SATA 3.0 for storage
- SATA RAID 0/1/5
- 6 USB 3.2 Gen 2, 2 USB 3.2 Gen 1, 2 USB 2.0, 4 COM (4 RS-485), GPIO, Audio, System FAN
- Onboard TPM 2.0
- SMBus, iAMT 16.x
- ATX Power

Ordering Information

Part Number	Description
911-CF02-001	MS-CF02/601-CF02-010/801-CF02-005 10 Intel Raptor Lake-S, R680E, 2"DDR4 SO DIMM, 1"HDMI, 2"DP, 1"eDP, 1"LVDS, 1"M.2 E key, 1"M.2 M key, 1"M.2 B key, 1"PCIe x16, 3"2.5GbE LAN, 3"SATA 3.0, 8"USB 3.2, 2"USB 2.0, 4"COM, TPM2.0, Mini-ITX
911-CF02-002	MS-CF02/601-CF02-020/801-CF02-006 10 OPT-A Intel Raptor Lake-S, H610E, 2"DDR4 SO DIMM, 1"HDMI, 2"DP, 1"eDP, 1"LVDS, 1"M.2 E key, 1"M.2 M key, 1"PCIe x16, 2"2.5GbE LAN, 3"SATA 3.0, 4"USB 3.2, 4"USB 2.0, 4"COM, TPM2.0, Mini-ITX
911-CF02-003	MS-CF02/601-CF02-030/801-CF02-007 10 OPT-B Intel Raptor Lake-S, Q670E, 2"DDR4 SO DIMM, 1"HDMI, 2"DP, 1"eDP, 1"LVDS, 1"M.2 E key, 1"M.2 M key, 1"M.2 B key, 1"PCIe x16, 3"2.5GbE LAN, 3"SATA 3.0, 8"USB 3.2, 2"USB 2.0, 4"COM, TPM2.0, Mini-ITX

Packing List

Part Number	Description	Quantity
K1D-1008261-V03	SATA Cable, 500mm	1
K14-3018004-V03	COM Port Cable, 250mm	1
E21-CF02010-C22	I/O Shielding (For SKU 1&2)	1
E21-CF02010-C22	I/O Shielding (For SKU 3)	1

Specifications

System Processor	CPU	SKU1	SKU2	SKU3		
		12th Gen Intel® Alder Lake-S i9/i7/i5/i3/Pentium®/Celeron® IOTG Series Processor, Max 65W				
		13th Gen Intel® Raptor Lake-S i9/i7/i5/i3/Pentium®/Celeron® IOTG Series Processor, Max 65W				
		14th Gen Intel® Raptor Lake-S Refresh i9/i7/i5/i3/Pentium®/Celeron® IOTG Series Processor, Max 65W				
		Frequency	1.6 GHz~5.1 GHz (Depends on CPU)			
		L2 Cache	2MB~30MB (Depends on CPU)			
Memory	Frequency <td colspan="3">1.6 GHz~5.1 GHz (Depends on CPU)</td>	1.6 GHz~5.1 GHz (Depends on CPU)				
	L2 Cache	2MB~30MB (Depends on CPU)				
	CPU Type	Socket (LGA 1700)				
	Chipset	Intel® R680E	Intel® Q670E	Intel® H610E		
	BIOS	AMI UEFI				
	Technology	Dual-channel DDR4 (ECC/ non-ECC) 3200MT/s	Dual-channel DDR4 (non-ECC) 3200MT/s			
Graphic	Max. Capacity	Up to 64GB				
	Socket	2 x 260-pin DDR4 SO-DIMMs				
	Controller	Intel® UHD Graphics				
	Graphic Memory	Depends on CPU				
	LVDS	1 x Dual channel 18/24-bit (Connector shared with eDP)				
	eDP	1 (Connector shared with LVDS)				
Graphic	HDMI	1				
	DisplayPort	2				
	Multiple Display	4 independent displays		3 independent displays		
	Display Interface	LVDS up to 1920 x 1200@60Hz eDP up to 4096 x 2304@60Hz HDMI up to 4096 x 2160@24Hz DP up to 4096 x 2304@60Hz				
Ethernet	Controller	3 x Intel® I226-LM 2.5GbE LAN		2 x Intel® I226-V 2.5GbE LAN		
Audio	Controller	Realtek® ALC897 Audio Codec (Co-lay ALC888S)				
Super I/O	Controller	Fintek F81966D-I				
H/W Monitor	Watchdog Timer	256-level Watchdog Timer				
	Smart Fan	Yes				
TPM	Controller	Infineon® SLB 9670VQ2.0				
	PCIe x16	1 x PCIe x16 (Gen 4)				
Expansion Slot	M.2	1 x M key (PCIe x4 NVMe), 2242/2280 1 x E key (PCIe x1, USB 2.0, CNVi), 2230 1 x B key (PCIe x1, USB 3.2 Gen 2 x 1, USB 2.0), 3042 (with SIM Holder)		1 x M key (PCIe x4 NVMe), 2242/2280 1 x E key (PCIe x1, USB 2.0, CNVi), 2230		
		Storage	SATA	3 x SATA 3.0 (Support RAID 0/1/5)		
I/O Interface	USB	6 x USB 3.2 Gen 2 (rear) 2 x USB 3.2 Gen 1 (internal) 2 x USB 2.0 (internal)		2 x USB 3.2 Gen2 (rear) 2 x USB 3.2 Gen1 (rear) 2 x USB 2.0 (rear) 2 x USB 2.0 (internal)		
		Serial	4 x COM ports COM1: RS-232/422/485, RI/5V/12V, Auto-flow Control COM2~4: RS-232/422/485, 0V/5V/12V, Auto-flow Control		4 x COM ports COM1: RS-232/422/485, RI/5V/12V, Auto-flow Control COM2: RS-232/422/485, 0V/5V/12V, Auto-flow Control COM3~4: RS-232, 0V/5V/12V (RS-232/422/485 by option)	
	GPIO		16-bits (8 x GPI; 8 x GPO), 5V			
	Power Supply		DC Input	N/A		
			AC Input	ATX-Power 24P, 12V-4P		
	Environment	Operating Temperature	0 ~ 60°C Note: Thermal Test w/ Airflow:0.7m/s			
Operating Humidity		10 ~ 90%, non-condensing				
Storage Temperature		-20 ~ 80°C				
Storage Humidity		10 ~ 90%, non-condensing				
Physical characteristics	Dimensions (WxDxH)	170 x 170 mm (Mini-ITX)				
	Weight	0.43 Kg		0.41 Kg		
	EMC	CE, FCC Class B, BSMI, RCM, VCCI, UKCA				
Software Platform	OS Support	Windows 10 IoT Enterprise 2021 LTSC (64-bit) Windows 11 IoT Enterprise LTSC (64-bit) Linux (Support by request)				