




SER5466H

8-port RS-232 High Speed
PCI Express Serial Board

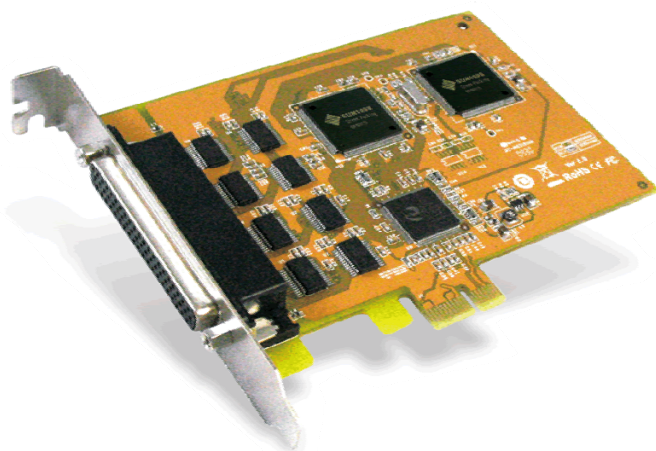

Introduction

SUNIX SER5466H, PCI Express serial communication boards meet the PCI Express Base Specification Revision 1.1. It is compatible with PCI Express x1, x2, x4, x8 and x16 lane Bus. The majorities of today's motherboards is not equipped with serial ports or only have one serial port. With SUNIX PCI Express serial board, users can add eight serial ports to their system, allowing them to use serial devices further. SUNIX SER5466H card has 128-bytes onboard FIFO buffer and compatible with 16C950 UART specification. It is designed with SUNIX UART controller, SUN1999 and as well built with many of SUNIX advanced features and technologies, making it the best solution for commercial and industrial automation applications.

Features

- Expands 8 independent RS-232 serial ports with communication speeds up to 921.6Kbps.
- High speed SUN1999 16C950 compatible UART controller on-board.
- Designed to meet PCI Express Base Specification Revision 1.1.
- Supports x1, x2, x4, x8, x16 (lane) PCI Express Bus connector keys.
- On-chip hardware auto flow control to guarantee no data loss.
- Built-in $\pm 15\text{KV}$ ESD protection for all serial signals meets IEC1000-4-2 standard.
- Plug-n-Play, I/O address and IRQ assigned by BIOS.
- Certified by CE, FCC, RoHS, and Microsoft WHQL approval.
- Support Microsoft Windows, Linux, and DOS.



Specifications

Serial Communication

Interface	RS-232	Signal	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Controller	SUNIX SUN1999 (16C950 UART Compatible)	Baud rate	50bps ~921.6Kbps
BUS	PCI Express one lane (x1)	Stop bit	1, 1.5, 2
No. of Port	8-port	Parity	even, odd, none, mark, space
IRQ & IO	Assigned by System	Flow Control	None, Xon/Xoff, RTS/CTS
FIFO	128byte Hardware	PCB Connector	DB62 Female
Protection	±15KV ESD protection for each signal Human Body Model (HBM) ±15KV IEC1000-4-2 Air Gap Discharge ±8KV IEC1000-4-2 Contact Discharge		

Driver Support

Windows Client	Windows XP/Vista/7/8/8.1 (X86/X64)
Windows Server	Windows 2000 / 2003 / 2008 / 2008 R2 / 2012 / 2012 R2 (X86/X64)
Windows Embedded	Windows CE 4.2/5.0/6.0/XP Embedded/POSReady 2009/POSReady 7/ Embedded System 2009/Embedded Standard 7
Linux	Linux 2.4.x/2.6.x
DOS	DOS
FreeBSD	FreeBSD 5.3~5.5 / 6.0~6.4
QNX	QNX 6.3.2/6.4.0
* IBM OS/2	WARP 3/WARP 4
* SCO UnixWare	UnixWare 7.1.3/7.1.4/ Open Server 5.0.7/6.0
* Sun Microsystems	Solaris 10
Note : " * " Supported by special inquiry.	

Regulatory Approvals

Hardware	EN55022 Class B, EN55024, EN61000-3-2, EN61000-3-3, FCC Part 15 Class B, BSMI: CNS13438, C-Tick: CISPR22 AS/NZS, RoHS
Software	Microsoft WHQL Windows ◆ Windows Client: XP/Vista/7/8/8.1 (X86/X64) ◆ Windows Server: 2000 / 2003 / 2008 / 2008 R2 / 2012 / 2012 R2 (X86/X64)

Environment


Operation Temperature	0 to 60°C (32 to 140°F)
Operation Humidity	5 to 95% RH
Storage Temperature	-20 to 85°C (-4 to 185°F)

Dimension


PCB Dimension	127 x 98 mm
Bracket	Standard 121 mm
Bracket Space	1




Application

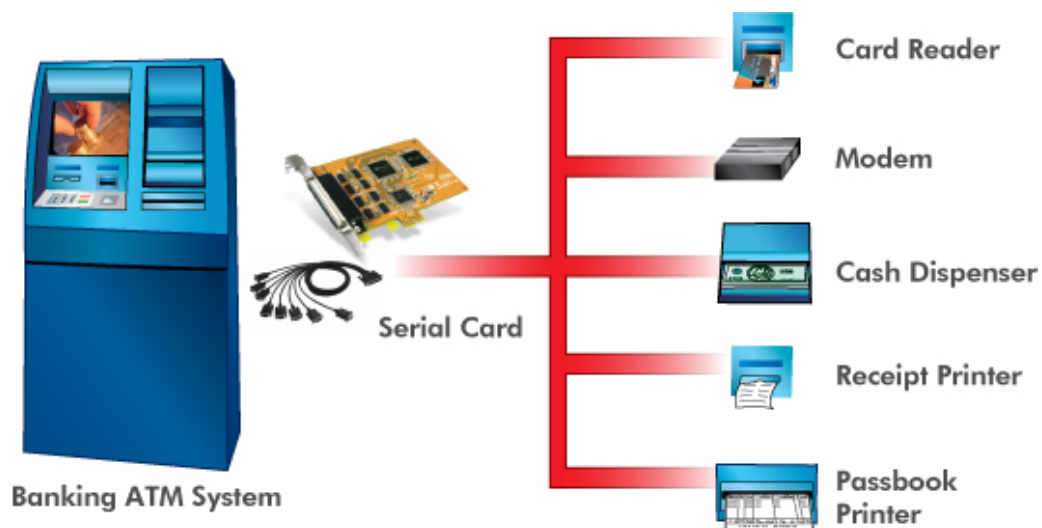

Mechanical Drawings (Unit = mm)

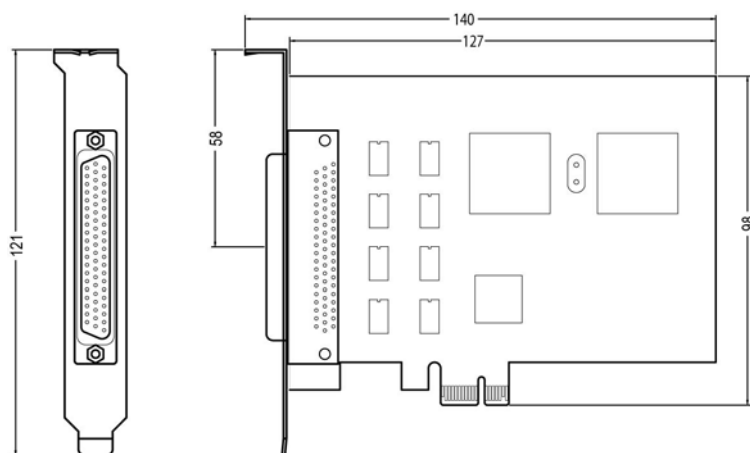

Pin Assignment

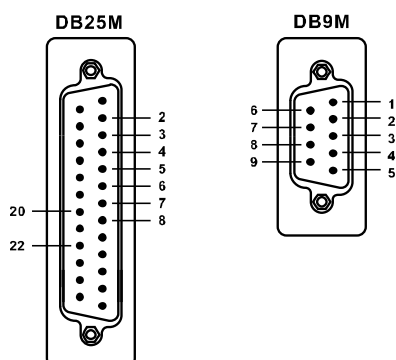

PIN	DB9M	DB25M
DCD	1	8
RxD	2	3
TxD	3	2
DTR	4	20
GND	5	7
DSR	6	6
RTS	7	4
CTS	8	5



Packing List

Packing Content

- SER5466H – 8-port RS-232 High Speed PCI Express Serial Board
- Quick Installation Guide
- Software CD ROM
- DB62 to 8-port DB9/DB25 Male Connection Cable, 40 cm



Optional Accessories

- DB62 to 8-port DB9 Male Connection Cable, 40/100 cm

Part Number: 1WDB-62M04009D8000



- DB62 to 8 ports DB25 Male Connection Cable, 40/100 cm

Part Number: 1WDB-62M04025D800A





Order Information

Serial RS-232 Interface

Bus	Port	Connector	Baud Rate	ESD Protection	Power output	Bracket	Model NO.	
PCI Express	8	DB62 Female	115.2 kbps	±15KV	-	Standard	SER5466A	
			921.6Kbps		-		SER5466H	
		Mini SCSI 68 Female	115.2 kbps		-	Low profile	SER5466AL	
			921.6Kbps		-		SER5466HL	
	4	DB44 Female	115.2 kbps		-	Standard	SER5456A	
					5V/12V		SER5456P	
					-	Low profile	SER5456AL	
					5V/12V		SER5456PL	
			921.6Kbps		-	Standard	SER5456H	
					5V/12V		SER5456PH	
					-	Low profile	SER5456HL	
					5V/12V		SER5456PHL	
	2	DB9 Male	115.2 kbps		-	Standard	SER5437A	
		5V/12V			SER5437P			
		DB44 Female	921.6Kbps		-	Low profile	SER5437AL	
		5V/12V			SER5437PL			
DB9 Male	921.6Kbps	-	Standard	SER5437H				
5V/12V		SER5437PH						
DB44 Female	921.6Kbps	-	Low profile	SER5437HL				
5V/12V		SER5437PHL						
PCI	8	DB62 Female	115.2 Kbps	±2KV	-	Standard	SER5066A	
		Mini SCSI 68 Female			-	Low profile	SER5066AL	
		5x2 Pin Header			-	Standard	SER5066U	
		DB62 Female			-	Low profile	SER5066UL	
		Mini SCSI 68 female	921.6Kbps	±15KV	-	Standard	SER5066H	
		5x2 Pin Header			-	Low profile	SER5066HL	
		-			Standard	SER5066UH		
		-			Low profile	SER5066UHL		
	4	DB44 Female	115.2 Kbps	±2KV	-	Standard	SER5056A	
					5V/12V		SER5056P	
					-	Low profile	SER5056AL	
					5V/12V		SER5056PL	
		5x2 Pin Header	921.6Kbps	±15KV	-	Standard	SER5056U	
					-	Low profile	SER5056UL	
					-	Standard	SER5056H	
					-	Low profile	SER5056HL	
		5x2 Pin Header	921.6Kbps	±15KV	5V/12V	Standard	SER5056PH	
		-			Standard	SER5056UH		
		-			Low profile	SER5056UHL		
		-				SER5056PHL		
		DB44 Female	115.2Kbps	±2KV	5V/12V	Standard	SER5037A	
		DB9 Male			5V/12V		SER5037P	
	5x2 Pin Header	-			Low profile	SER5037U		
	DB44 Female	5V/12V				SER5037AL		
	5x2 Pin Header	921.6Kbps	±15KV	-	Standard	SER5037PL		
	DB9 Male			-		SER5037UL		
	5x2 Pin Header			-	Low profile	SER5037H		
	DB44 Female			5V/12V		SER5037PH		
	1	DB9 Male	115.2Kbps	±2KV	-	Standard	SER5037UH	
					5V/12V		SER5037HL	
					5x2 Pin Header	-	Low profile	SER5037PHL
					DB9 Male	5V/12V		SER5027A
		5x2 Pin Header	921.6Kbps	±15KV	5V/12V	Standard	SER5027P	
		DB9 Male			-		SER5027U	
		5x2 Pin Header			-	Low profile	SER5027AL	
		DB9 Male			5V/12V		SER5027PL	
		5x2 Pin Header	921.6Kbps	±15KV	-	Standard	SER5027UL	
		DB9 Male			-		SER5027H	
5x2 Pin Header	5V/12V	Low profile			SER5027PH			
DB9 Male	-				SER5027UH			
Express Card	4	DB44 Female	921.6Kbps	±15KV	-	34mm	ECS4000	
	2				-		34mm	ECS2000
	1				-		34mm	ECS1000
CardBus	4	DB44 Female	115.2Kbps	±15KV	-	54mm	CBS4000	
	2				-		54mm	CBS2000
	1				-		54mm	CBS1000