


RCC-MS-GMD32G(T)

32" Medical Display 4K version with metal enclosure (RTOP3213AMC/T)

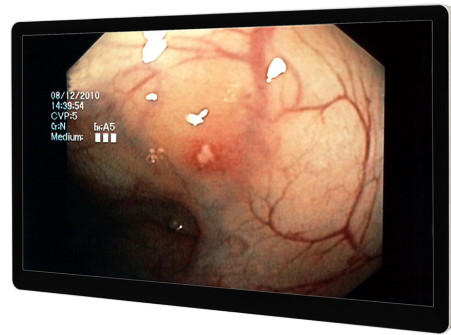

Product Features

- IP65 in front & IPx1 whole unit
- BT standards
- GPIO Remote control (optional)
- DIN6868-157 compliant
- Calibration mode (default)
- PIP & PBP

Specification

Audio

Speaker Output 2W speaker x2 (optional)

Certification

Certification Information CE, FCC Class B
UL/cUL(ANSI/AAMI ES60601-1, CAN/CSA C22.2 NO.60601-1)
DIN6868-157 compliant

Panel

LCD Size	32"
Display Type	4K
Resolution	3840 x 2160
Luminance	AR glass 780 nits AG PCAP 750 nits (optional)
Contrast ratio	1500
Viewing angle	89/89 Deg. Horizontal & Vertical
Response time	20 ms
Backlight	LED

Touch Type	Projective capacitive multi-touch up to 10 points
Display color	1.07 G
DICOM compliant	Ambient light 0/0.5/1/1.5/2/2.5/3 cd/m2 (default)
Active display area	708.4 mm x 398.5 mm

I/O

Input Interface	1 x VGA 1 x DVI 1 x HDMI 1 x Display port
Digital input	Standard DVI & DisplayPort
Analog input	Video: 0.7Vpp/75 ohm, Sync: Separate TTL level. Composite Sync or sync on green, Hor: 30~92KHz, Ver: 50~85Hz
Cables	DVI / DisplayPort cables
Plug & play	VESA DDC2B
User control and indicator	Power indicator x1, Sensor keys x 8 TOUCH DISABLED/SOURCE/PIP/SWAP/MENU/-/+ /POWER

Mechanical & Environmental

Weight	15 kg
IP Rating	IP65 in front & IPx1 whole unit
VESA	100 x 100/200 x 100
Construction	GM Metal
Power Requirement	AC/DC adapter Input: 100~250 Vac, 60/50Hz Output: 24V, 6.25A
Power Mode	24V DC in
Dimension	761.2mm x 465.6mm x 61.5mm
Base stand	Base stand (optional)
Power consumption	On:<130W; active off: <5W
Power management	EPA Energy Star compliant

Color Mode

Color temperature	Cool/neutral/warm/user
gamma	1.8/2.0/2.2/2.4/linear
Calibration mode	Communication protocol is ready to calibrate the monitor through USB (default)

Optional Items

Optional Items	AG PCAP touch 2W speaker x2 GPIO Remote control SDI in/out or DVI in
----------------	---

Ordering Information

Ordering Information	RCC-MS-GMD32G-01R: RTOP3213AMC with AR Glass With: Power adapter*1, HDMI 1.8M 4K cable*1, 5W Speaker*2 ; Without: Power Cord RCC-MS-GMD32T-01R: RTOP3213AMCT with AG PCAP touch With: Power adapter*1, USB touch cable*1, HDMI 1.8M 4K cable*1, 5W Speaker*2 ; Without: Power Cord
----------------------	--
