



ACS-330

Intel® Alder Lake-N Embedded Edge Controller

User Manual

Release Date

Oct. 2025

Revision

V1.0

©2025 Aplex Technology, Inc.

All Rights Reserved.

Published in Taiwan

Aplex Technology, Inc.

15F-1, No.186, Jian Yi Road, Zhonghe District, New Taipei City 235, Taiwan

Tel: 886-2-82262881 Fax: 886-2-82262883 email: aplex@aplex.com URL: <http://www.aplex.com>

Revision History

Reversion	Date	Description
1.0	2025/10/27	First Release

Warning!

This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions manual, it may cause interference to radio communications. It has been tested and found to comply with the limits for a Class A computing device pursuant to FCC Rules, which are designed to provide reasonable protection against such interference when operated in a commercial environment. Operation of this equipment in a residential area is likely to cause interference in which case the user at his own expense will be required to take whatever measures may be required to correct the interference.

Electric Shock Hazard – Do not operate the machine with its back cover removed. There are dangerous high voltages inside.

Disclaimer

This information in this document is subject to change without notice. In no event shall Apex Technology Inc. be liable for damages of any kind, whether incidental or consequential, arising from either the use or misuse of information in this document or in any related materials.

Packing List

Model	Description	Qty
Plug Conn	DINKLE,ESC250V-02P,1X2P,2.5mm,Green,4A,2P	1
CONNECTOR	PHOENIX CONN/PH 5.08 3P/2ESDVM-03P(F)	1
Plug Conn	DINKLE,0221-2005,1X5P,3.5mm,Green,5P	2

Option List

Model	Description	Qty
ADAPTER	ADAPTER/AC100~240V IN/24V5A OUT/120W EA11011M-2400	1
POWER CORD	AC power cord	1

Table of Contents

REVISION HISTORY	1
WARNING!	2
DISCLAIMER.....	2
CHAPTER 1 SYSTEM PRODUCT.....	6
1.1 Features.....	6
1.2 Specifications	6
1.3 Dimensions.....	8
1.4 Brief Description of ACS-330.....	10
1.5 Chassis Specifications & I/O Connector Function	11
1.6 DIN-rail Mounting (optional).....	12
CHAPTER 2 HARDWARE	13
2.1 Motherboard Introduction.....	13
2.2 Motherboard Specifications & Dimensions	13
2.3 Board Dimensions	15
2.4 Jumpers and Connectors Location	16
2.5 Jumpers Setting and Connectors	18
CHAPTER 3 BIOS SETUP DESCRIPTION	25
3.1 Operations after POST Screen.....	25
3.2 BIOS SETUP UTILITY.....	25
3.3 Main Settings	26
3.4 Advanced Settings.....	28
3.5 Chipset Settings.....	57
3.6 Security Settings.....	61
3.7 Boot Settings	63
3.8 Save & Exit Settings.....	64

List of Figures

Figures

FIGURE 1: DIMENSIONS OF ACS-330.....	9
FIGURE 2: OVERALL APPEARANCE OF ACS-330.....	9
FIGURE 3: MOTHERBOARD DIMENSIONS	12
FIGURE 4: JUMPERS AND CONNECTORS LOCATION- BOARD TOP	16
FIGURE 5: JUMPERS AND CONNECTORS LOCATION- BOARD BOTTOM	17
FIGURE 6: JUMPERS AND CONNECTORS LOCATION- EXTERNAL I/O	17

1.1 Features

- Intel® Alder Lake-N processors (12th Gen) with DDR5 memory, up to 32GB.
- Supports 2 x M.2 slots (1x M.2 B-Key 3042/3052 4G/5G system with nano SIM card slot, 1x M.2 B+M Key 2242 SATA storage).
- Supports 1x Mini PCIe 3027/3051 Wi-Fi system.
- Dual 2500 BASE-T Ethernet supports Time-Sensitive Network (TSN) technology.
- Dual display (1x HDMI, 1x DP).
- 8x GPIOs.
- 2x RS232/422/485 ports.
- Modular design for optional UARTs extension.
- Modular design for optional two PSE LAN ports and four USB2.0 ports.
- Modular design for optional AI acceleration card.
- Support Windows 11 IoT Enterprise LTSC

1.2 Specifications

	ACS-330
System	
CPU	Intel® Alder Lake Processor N97 (4-core, 6MB Cache, 12W TDP)
Security	Support Onboard TPM 2.0
Memory	1 x DDR5 NON-ECC SO-DIMM slot, support up to 32GB capacity at 4800MT/S.
Multiple Display	Dual display(1 x HDMI, 1 x DP)
HDMI	1 x HDMI 2.0b (up to 4K @60Hz, HDCP 2.2)
DP	1 x Display Port 1.4 (up to 4K @60Hz, VDSC 1.1, HDCP 2.2, MST)
MISC. Function	1 x SMBus Wafer Header 1 x I2C Interface (M.2 Connector)
Outside IO Port	
USB	4 x USB2.0 Type-A at Front Side
LAN	2 x 2500 BASE-T Ethernet Ports(RJ-45)
Serial Port	2 x RS-232/422/485 select via BIOS
GPIO	8 x GPIO (4xIN, 4xOUT, 3.3V/5V hardware selectable)
Audio	1 x Line-out, 1 x Mic-in, 1 x Line-in
Button	1 x Power Button 1 x Switch Connector
Storage Space	
Storage	1 x M.2 B+M-Key 2242 (SATA Interface)
Power	

Power Input	9-36V DC(Auto Power on)
Power Consumption	Max: 26.99W
Expansion	
Expansion Slot	1 x Mini PCIe 3027/3051 for Wi-Fi module (PCIe/USB2.0 Signal) 1 x M.2 B-Key 3042/3052 for 4G/5G module (PCIe/USB2.0/USB3.2 signal)
Others	
Other Expansion Card	UART- 4 x RS-232/422/485 (BIOS Selectable) GPIO- 8 x GPIO (4xIN/4xOUT, 3.3V/5V, hardware -selectable)
Others	1 x Power LED indicator
Environmental	
Operating temperature	-20~60°C (-4 ~ 140 °F) (-30~70°C for option)
Storage temperature	-40~85°C (-40 ~ 185 °F)
Humidity	95% RH @ 40°C/104 °F
Vibration	7.7 Grms, IEC60068-2-64, Random, 5Hz to 2KHz, 10min / Axis (Operating)
Shock	20G, half sine shock pulse, 11ms duration, 3 times per face
Drop	90cm (1 corner, 3 edges, 6 surfaces, Full packing)
Certification	CE / FCC Class A, UKCA, LVD, RoHS, UL
RoHS	RoHS Compliant
Ingress Protection	IP20
Operating System Support	
OS Support	Windows 11 IoT Enterprise LTSC/LINUX/Ubuntu 20.04 / 22.04
Mechanical	
Mounting	Wall Mount Din Rail
Dimension (mm)	200 x 140 x 55 (WxDxH)
Net Weight(Kg)	2.2

1.3 Dimensions

ACS-330 Wall Mount

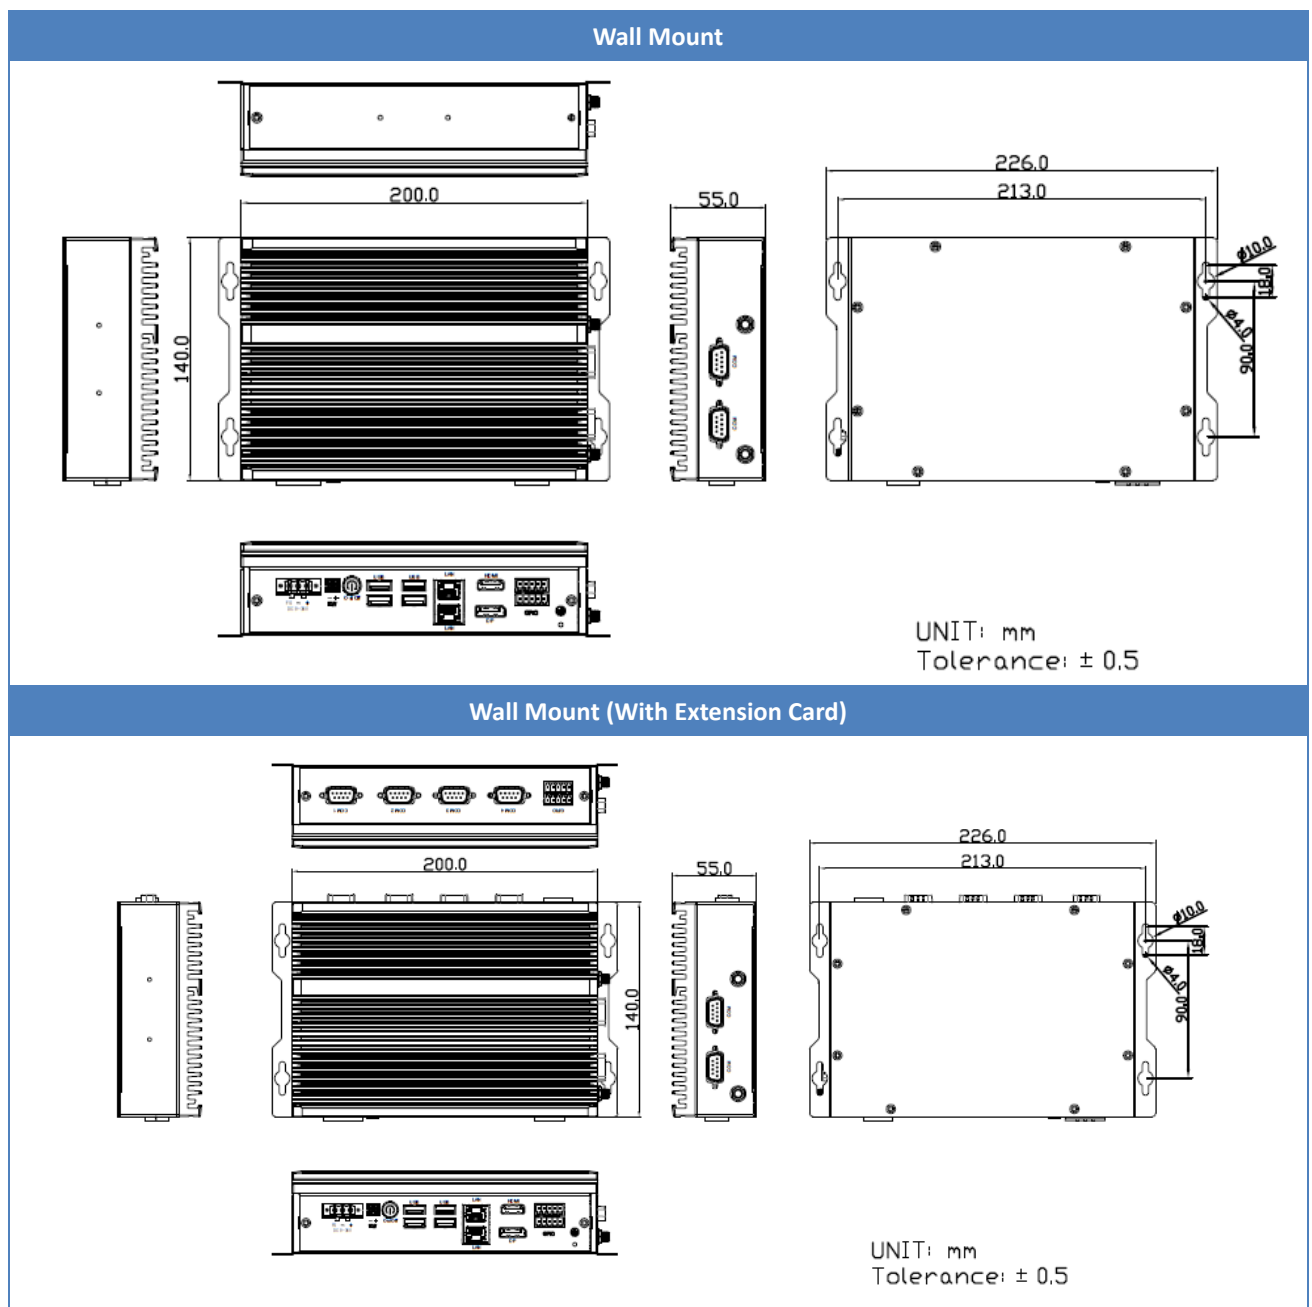


Figure 1: Dimensions of ACS-330 (Wall Mount)

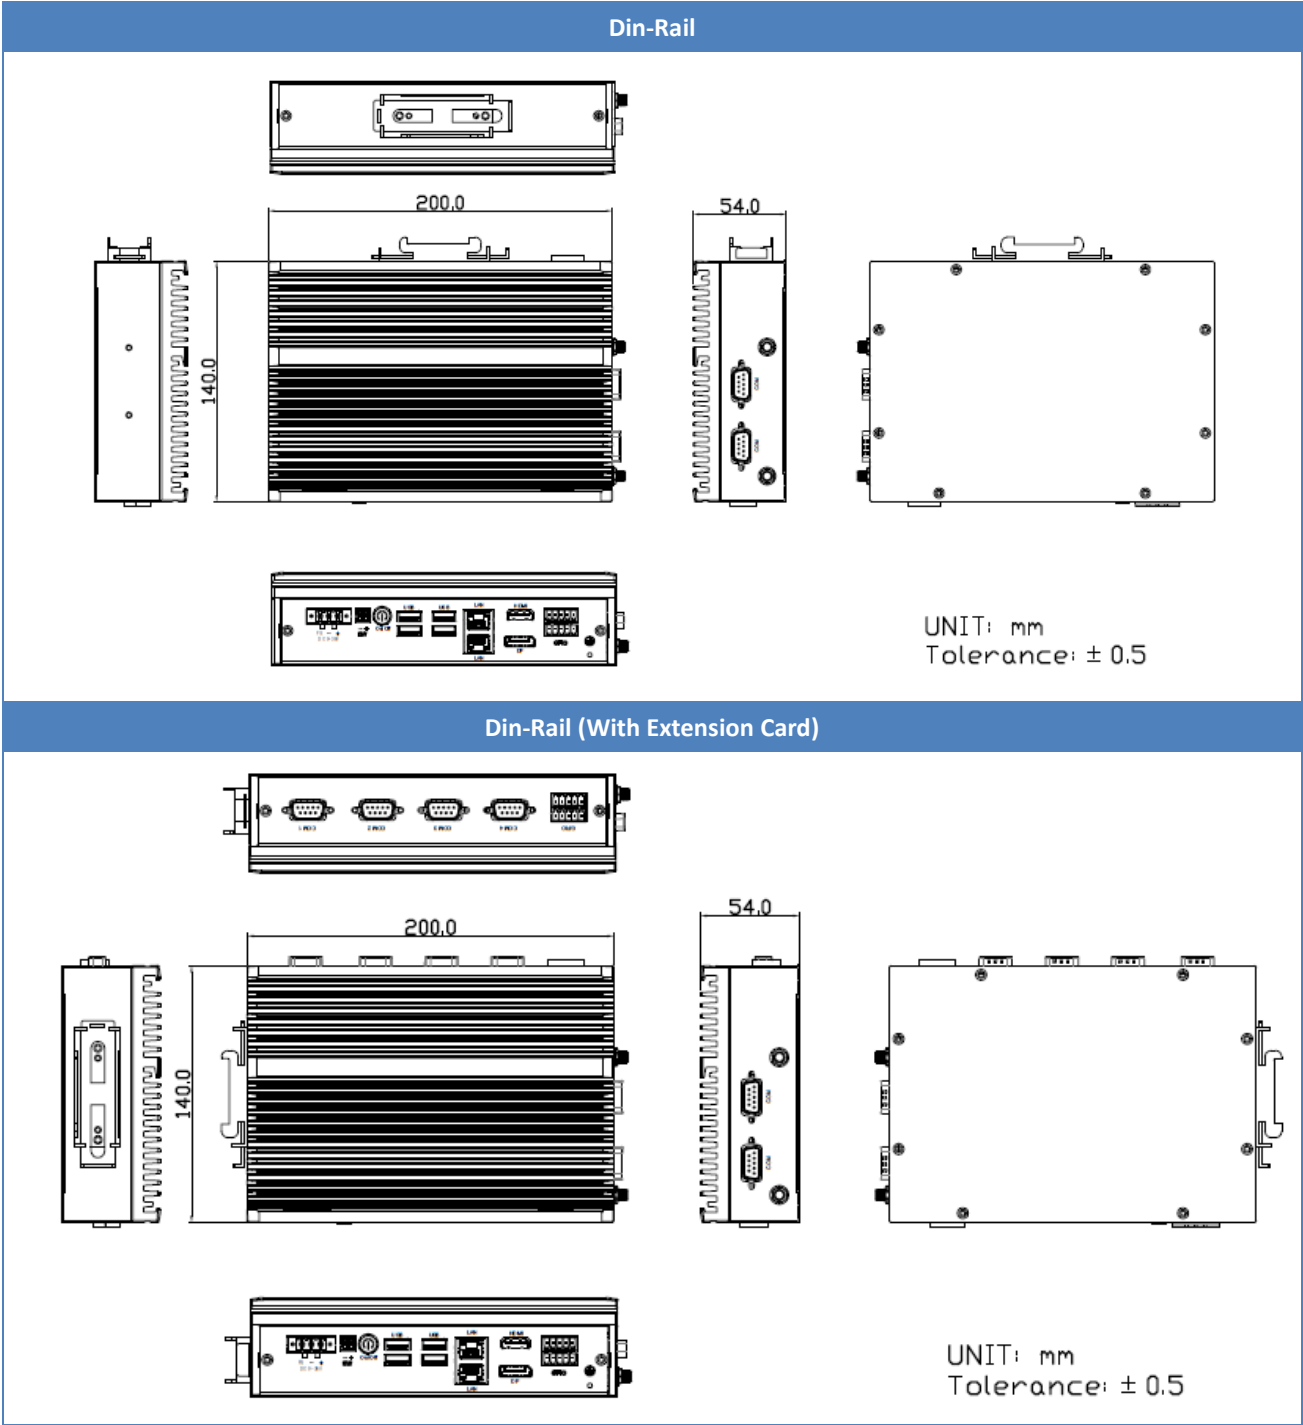


Figure 2: Dimensions of ACS-330 (Din Rail)

1.4 Brief Description of ACS-330


APLEX's ACS-330 embedded edge controllers deliver high performance and flexibility, supporting PCIe, SATA, and optional UART for Wi-Fi, 5G, and storage with cableless.

ACS-330 provide reliable edge solutions, bridging the gap between OT and IT. By installing the ACS-330 series, your system gains video output capabilities that enable information visualization on dashboards and monitors.



Figure 2: Overall Appearance of ACS-330

1.5 Chassis Specifications & I/O Connector Function

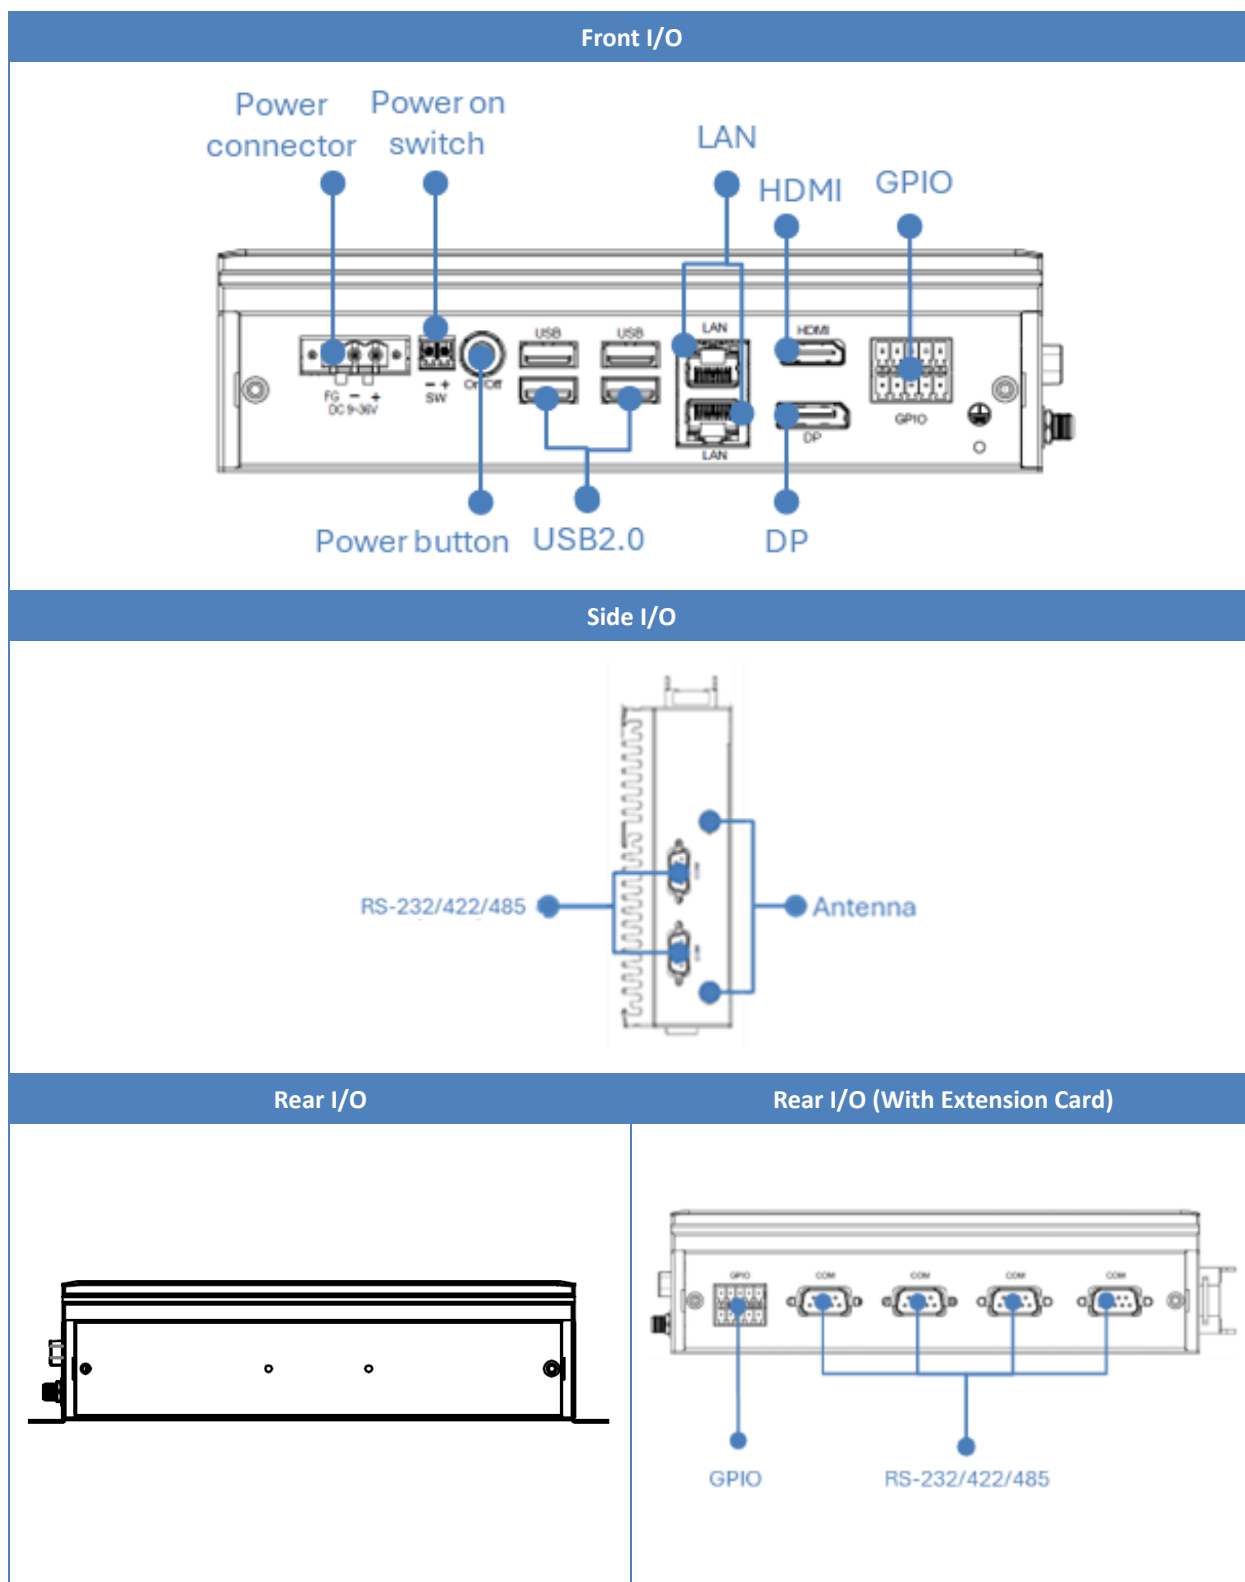

1.6 DIN-rail Mounting (optional)


Suggested Installation Method

STEP 1:

Hold the DIN rail lower lip kit on the mounting rail.

STEP 2:

Press the device against the upper mounting rail until it snaps into place

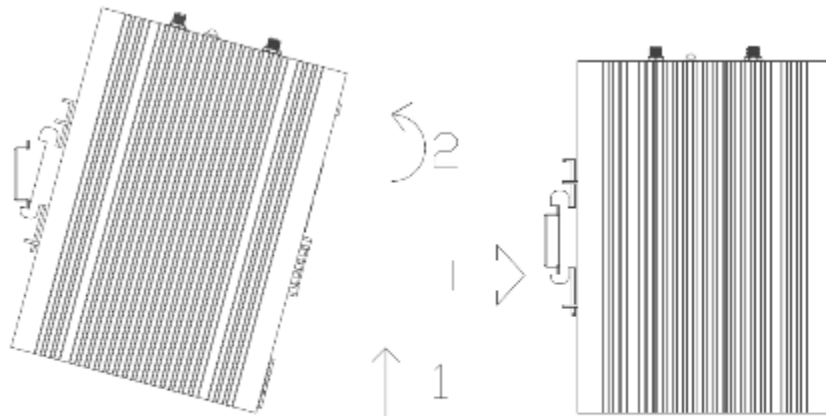

Assembly instructions


Suggested Removal Method

STEP 1:

Pull the device up and off the DIN rail with the upper lip off the rail.

STEP 2:

Gently pull the device back at a 45° angle away from the rails, and then pull the device down to remove.

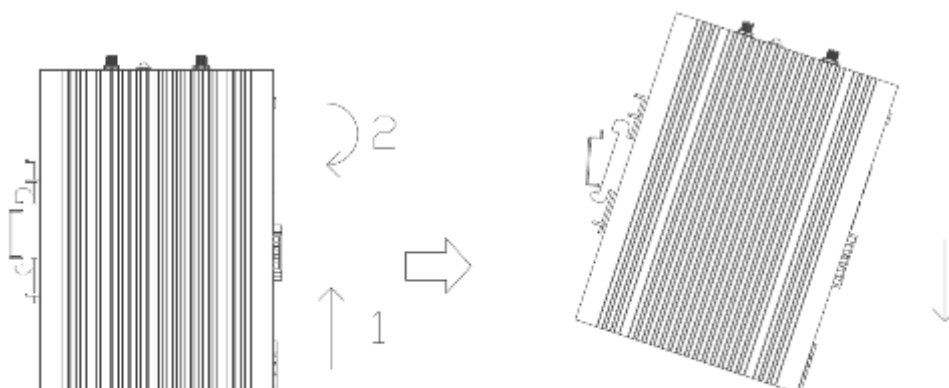

Disassembly instructions

2.1 Motherboard Introduction


SBC-7136 is a industrial motherboard developed on the basis of Intel Alder Lake, which provides abundant peripheral interfaces to meet the needs of different customers.

2.2 Motherboard Specifications & Dimensions

Specifications	
Board Size	196mm x 114mm
CPU Support	Intel N97, 4C4T, up to 3.6GHz, 24EU iGPU, TDP:12W
Chipset	SOC
Memory Support	1 x SO-DIMM (262pins), up to 32GB DDR5 4800MT/s
Graphics	Integrated Intel UHD Graphics
Display Mode	1 x HDMI 2.0b via HDMI Port 1 x DP 1.4 via DP Port
Support Resolution	HDMI: support up to 4096x2160@60Hz DP: support up to 4096x2160@60Hz
Super I/O	Extra ITE IT8786E-I/HX are optional
BIOS	AMI/UEFI BIOS
Storage	1 x SATAIII via 7pin SATA connector 1 x M.2 B+M Key(SATA) 2242 for Storage
Ethernet	1 x 2.5G LAN via Intel® I226V/IT controller (PXE/WOL) 1 x 2.5G LAN via Intel® I226V/IT controller (PXE/WOL)
USB	4 x USB2.0, Type-A stack ports 1 x USB2.0 for M.2 B+M Key 1 x USB2.0 for Mini PCIE 1x USB2.0 & USB3.2 Gen1 for M.2 B-Key
Serial	2 x RS-232(default)/422/485, signals select via BIOS, pin9 RI(default)/5V/12V, select via jumper on BOARD. 4 x RS-232(default)/422/485 via Extra card are optional
GPIO	8-bit digital I/O connector
Audio	Support Audio via Realtek ALC887-VA2-CG HD audio codec Support Line-in,Line-out,MIC by 2.0mm 2x5pin header
Expansion Slots	1 x M.2 B-Key(PCIex1, USB3.0, USB2.0),3042/3052 for 4G/5G module with Nano SIM slot 1 x MiniPCIE (PCIex1, USB2.0) for WiFi/BT module

FAN	1x 2pin fan connector
Watchdog Timer	Software programmable 1–255 level
TPM	Onboard TPM, Support fTPM, select via BIOS
Switches and LED Indicators	1 x Power button 1 x Switch connector
Battery	Support 3V RTC Li-battery via 2pin wafer (VBAT1)
Power Management	Wide range DC 9~36V±10% power input via 3pin connector
Temperature	Operating: -20°C to 60°C Storage: -40°C to 85°C
Humidity	5% - 95%, non-condensing, operating
Certifications	Meet CE/FCC class A UL RoHS2.0

2.3 Board Dimensions

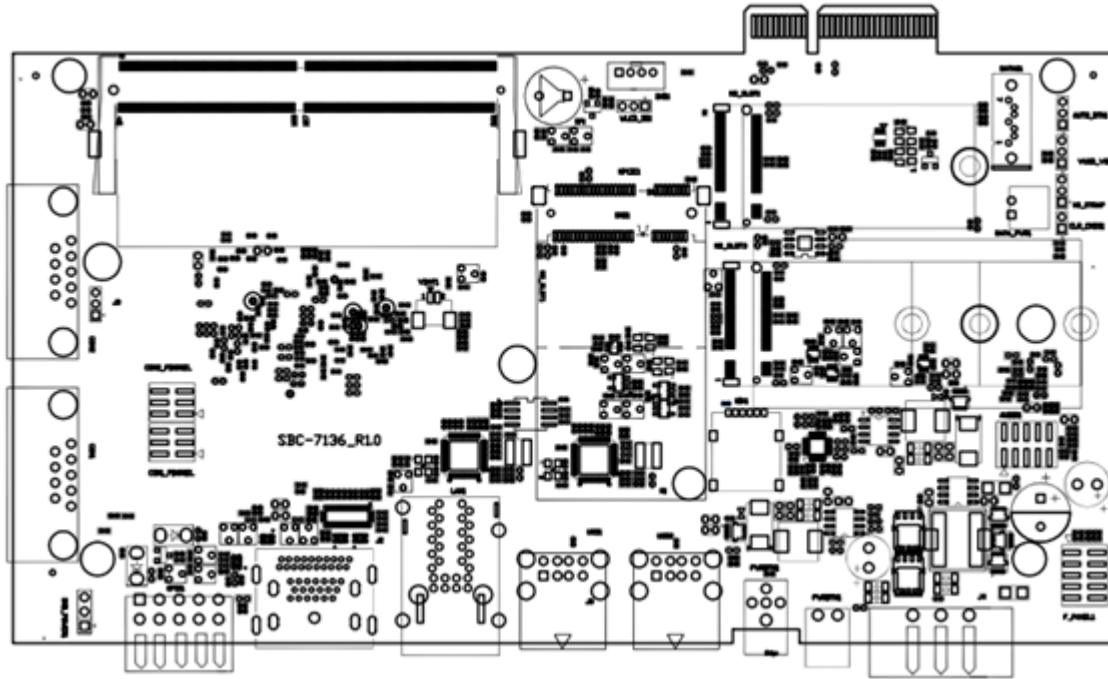

Dimensions: 146 x 101.6 (units :mm)

Figure 3: Motherboard Dimensions

2.4 Jumpers and Connectors Location

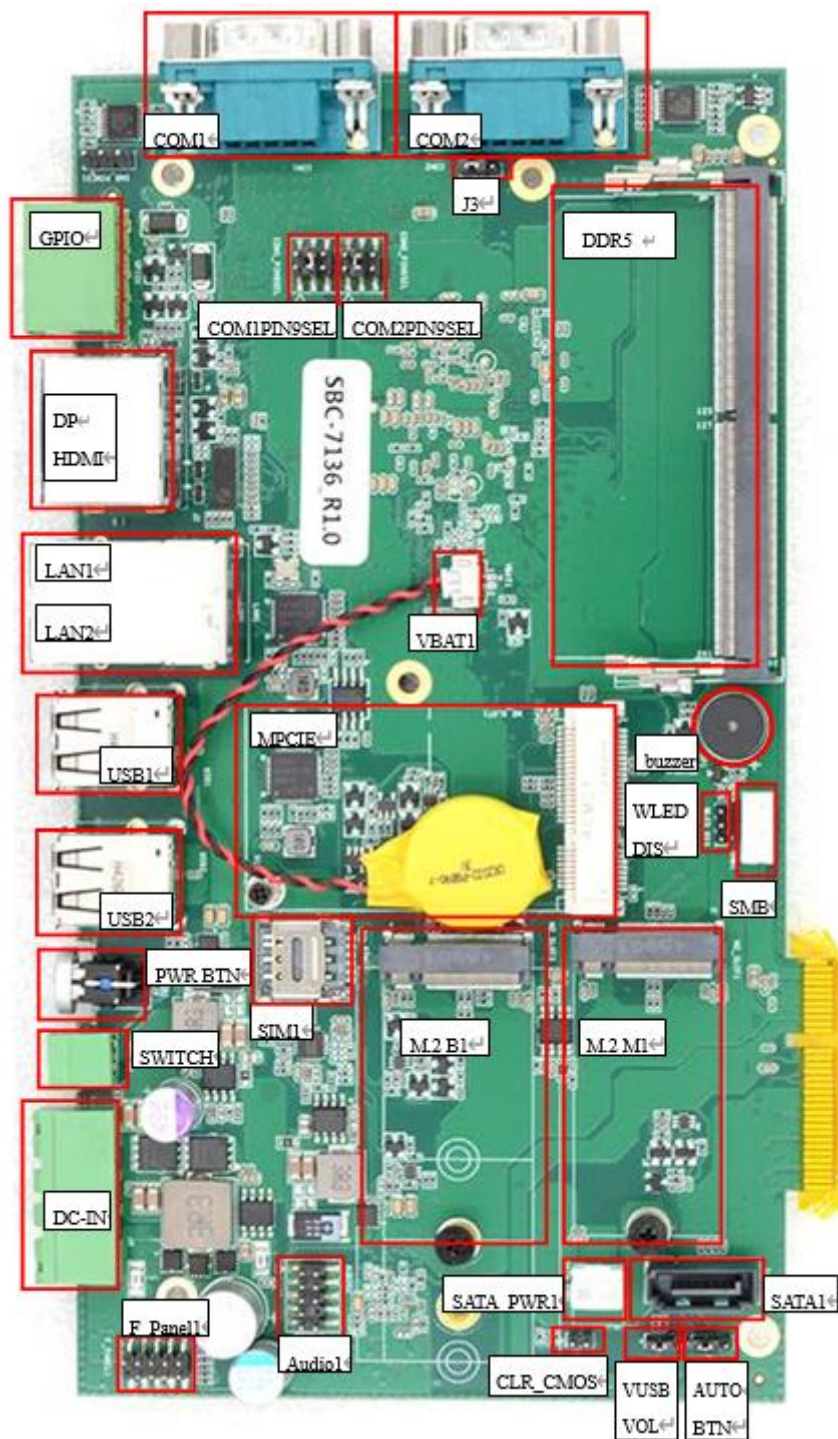


Figure 3: Jumpers and Connectors Location- Board Top

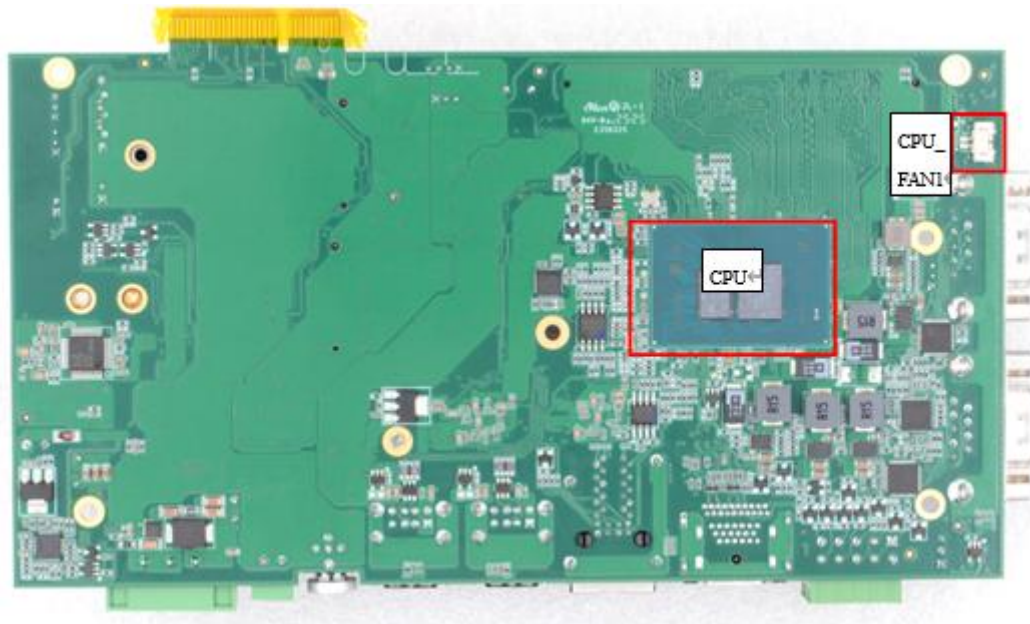


Figure 4: Jumpers and Connectors Location- Board Bottom

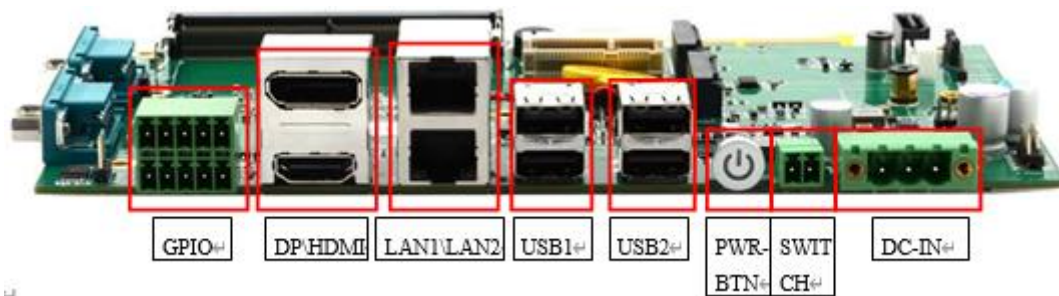


Figure 5: Jumpers and Connectors Location- External I/O

2.5 Jumpers Setting and Connectors

1. CPU1:

(FCBGA1264) Onboard Intel Alder Lake SoC

Model	SoC				
	Number	PBF	Cores/ Threads	TDP	Remarks
SBC-7136-N97	N97	Up to 3.6GHz	4C/4T	12W	Default

2. DDR5:

(SO-DIMM 262Pin slot) DDR5 memory socket, the socket is located at the top of the board and supports 262Pin 1.1V DDR5 SO-DIMM memory module up to 16GB.

Max Memory Size (dependent on memory type).

3. VBAT1:

(1.25mm Pitch 1x2 wafer Pin Header) 3.0V Li battery is embedded to provide power for CMOS.

Pin#	Signal Name
Pin1	VCC_RTC
Pin2	GND

4. CLR CMOS1:

CMOS clear switch, CMOS clear operation will permanently reset old BIOS settings to factory defaults.



Procedures of CMOS clear:

- Turn off the system and unplug the power cord from the power outlet.
- To clear the CMOS settings, close CLR_CMOS1 for 1 second
- Power on the system again.
- When entering the POST screen, press the key to enter CMOS Setup Utility to load optimal defaults.
- After the above operations, save changes and exit BIOS Setup.

5. CPU FAN1:

(1.25mm Pitch 1x2 wafer Pin Header) Fan connector, cooling fans can be connected directly for use.

Pin#	Signal Name
1	GND
2	VCC(5V_S0)



Note:

Output power of cooling fan must be limited under 3W.

6. DC IN1:

(5.08mm Pitch 1x3 Pin Connector) DC9~36V System power input connector.


Pin#	Power Input
Pin1	DC_IN+ (DC+9V~36V)
Pin2	DC_IN- (Ground)
Pin3	GND (Earth)

7. SMB:

(2.00mm Pitch 1x4 Pin Header) For SMBUS interface Device.

Pin#	Signals
1	GND
2	Data
3	Clock
4	Vcc 3.3V

8. Display Port:




Integrated DP and HDMI connectors (upper layer interface), support DP1.4 and maximum resolution 4096x2304@60Hz.

9. HDMI1:



Integrated DP and HDMI connectors (lower level interface), support HDMI2.0b and maximum resolution 4096x2304@60Hz.

10. LAN1, LAN2:



(Integrated RJ45 Connector) Provide 2.5GbE LAN via Intel® I226V/IT

Status	Description
Green ACT, Yellow Link	100Mbps
Green ACT, Yellow Link	1Gbps/2.5Gbps

11. WLED DIS:

(2.0mm Pitch 1x3 Pin Header) For Mini PCIE signals

JP1 Pin#	Function
1	For MiniPCIE Pin20 signals:W_DISABLE
2	For MiniPCIE Pin42 signals:LED_WWAN
3	For MiniPCIE Pin44 signals:LED_WLAN


12. AUDIO:

(2.0mm Pitch 2x5Pin header) Provide line-in/line-out/mic-in via onboard Realtek ALC897 codec.

Signal Name	Pin#	Pin#	Signal Name
LINE-OUT-R	1	2	LINE-OUT-L
GND	3	4	GND
MIC-IN-R	5	6	MIC-IN-L
GND	7	8	GND
LINE-IN-R	9	10	LINE-IN-L

13. USB1, USB2:

(Double stack USB typeA) Rear USB2.0 connector, provides up to 4 USB2.0 ports.



Each USB Type A Receptacle (2 Ports) Current limited value is 1A.


14. VUSB VOL:

(2.0mm Pitch 1x3 Pin Header) Set USB power status when the system is turned off..

JP1 Pin#	Function
Close 1-2	USB interface provides power after the system is turned off (Default)
Close 2-3	The USB interface does not provide power after the system is turned off

15. COM1, COM2:

(DB9 connector) Provide serial RS232/422/485 via standard DB9 male connector. Default is set to RS232, RS422/485 can be selected via BIOS. Pin 9 RI/5V/12V select via COM1_PIN9SEL, COM2_PIN9SEL.



RS232 (Default):	
Pin#	Signal Name
1	DCD# (Data Carrier Detect)
2	RXD (Received Data)
3	TXD (Transmit Data)
4	DTR (Data Terminal Ready)
5	GND
6	DSR (Data Set Ready)
7	RTS (Request To Send)
8	CTS (Clear To Send)
9	JP1 select Setting (RI/5V/12V)
BIOS Setup : Serial Port 1 Configuration 【RS-232】	

RS422 (option):	
Pin#	Signal Name
1	422_TX-
2	422_TX+
3	422_RX+
4	422_RX-
5	GND
6	NC
7	NC
8	NC
9	NC

BIOS Setup : Serial Port 1 Configuration 【RS-422】

RS485 (option):

Pin#	Signal Name
1	485-
2	485+
3	NC
4	NC
5	GND
6	NC
7	NC
8	NC
9	NC

BIOS Setup : Serial Port 1 Configuration 【RS-485】

16. COM1 PIN9SEL, COM2 PIN9SEL:

(2.0mm Pitch 2x3 Pin Header) For COM1, COM2 pin9 signal setting.

JP1 Pin#	Function
Close 1-2	COM1/2 Pin9 = +12V
Close 3-4	COM1 Pin9 RI (Ring Indicator, Default)
Close 5-6	COM1/2 Pin9 = +5V


17. J3: GPIO POWER Select:

Set GPIO connector voltage through J3 jumper.

JP1 Pin#	Function
Close 1-2	GPIO connector voltage= +5V
Close 2-3	GPIO connector voltage=+3.3V (Default)

18. SWITCH:

(3.5mm pitch 2x5 pin connector) Connect external switch.



JP1 Pin#	Function
1	GND
2	Power Button

19. GPIO1:

(3.5mm 2x5pin connector) Provide 8Xgpio with 3.3V or 5V.

Signal Name	Pin#	Pin#	Signal Name
GPIO_VCC	1	2	GND
GPIO0	3	4	GPIO1
GPIO2	5	6	GPIO3
GPIO4	7	8	GPIO5
GPIO6	9	10	GPIO7

20. F Panel1:

(2.0mm 2x5pin header) Provide power button/reset button/power LED/HDD LED.

Signal Name	Pin#	Pin#	Signal Name
HDD LED+	1	2	Power LED+
HDD LED-	3	4	Power LED-
Reset Button-	5	6	Power Button+
Reset Button+	7	8	Power Button-
NC	9	10	NC

21. SIM1:

(Nano-SIM Slot) Support Nano SIM card for M.2 B Key.

Pin#	Signal Name
1	SIM_VCC
2	SIM_RST
3	SIM_CLK
4	GND
5	NC
6	SIM_DAT

22. M2 B1:

(M.2 B-Key Socket) Support 3042/3052 4G/5G module with Nano SIM slot,and Support 2242 Nvme interface SSD.

23. M2 M1:

(M.2 B+M Key Socket) Provide SATA PCIe4, support M-key 2242 SATA interface SSD.

24. MPCIE:

(MPCIE) Provide USB2.0/PClex1, support Mini PCIE WiFi/BT expansion cards.

25. SATA1:

(SATA 7Pin) SATA connector provide SATA III signal for storages.

26. SATA PWR1:

(2.0mm Pitch 1x2 Wafer Pin Header) 5V power supply for SATA1 port device.

Pin#	Signal Name
1	5V_S0
2	GND



Note:

Output current of the connector must not be above 1A.


27. AUTO BTN:

The AUTO_BTN button allows you to select automatic power on after the motherboard is powered on.

Status	Function
Pin1-2 short circuit	Forced AT Mode(Default, auto power ON)
Pin2-3 short circuit	ATX Mode(Manual Power ON), but Auto power ON select via BIOS

3.1 Operations after POST Screen

After CMOS discharge or BIOS flashing operation. Press [Delete] key to enter CMOS Setup.

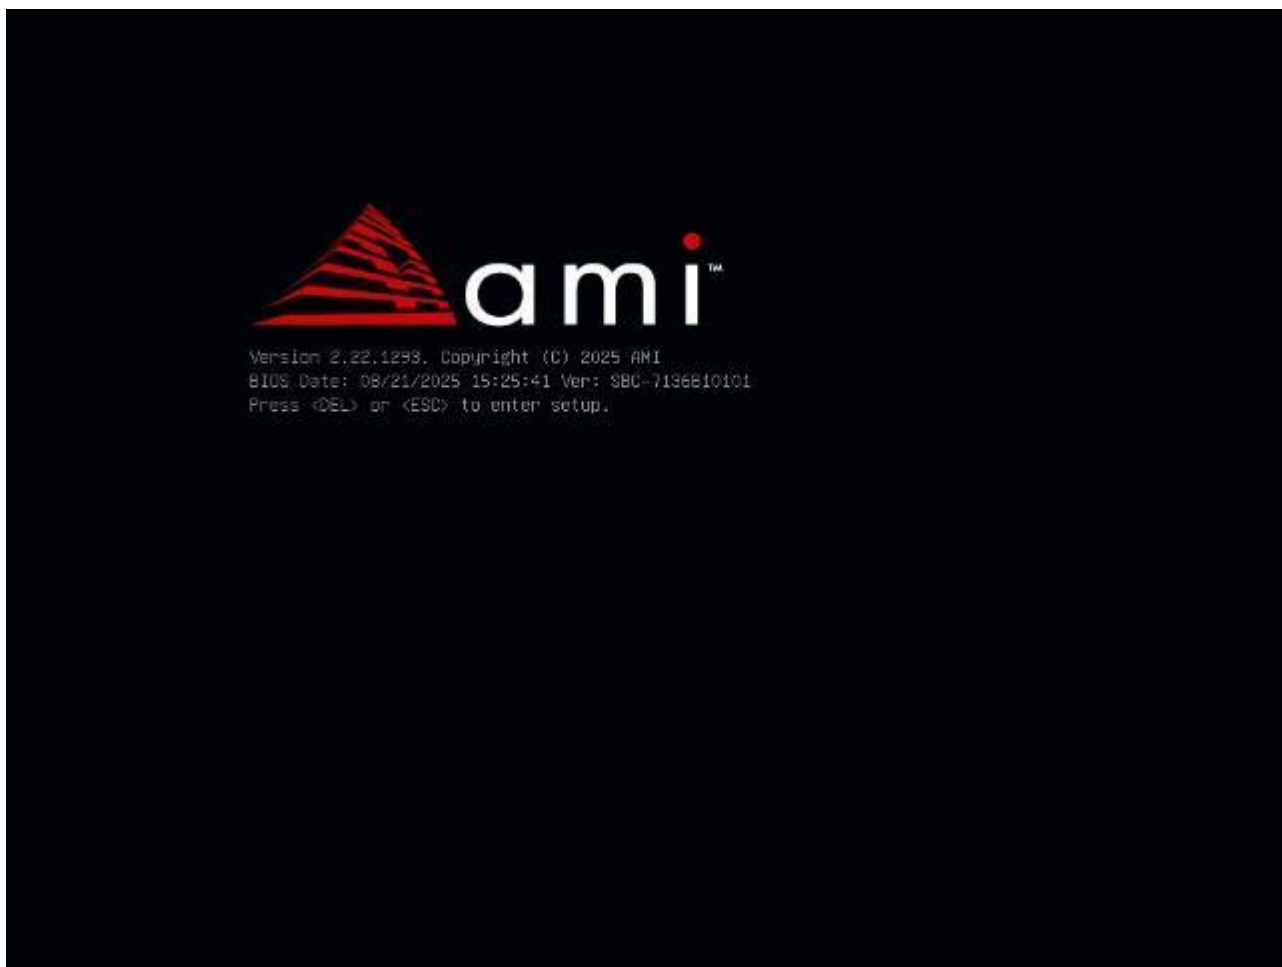


After optimizing and exiting CMOS Setup

3.2 BIOS SETUP UTILITY

Press [Delete] key to enter BIOS Setup utility during POST, and then a main menu containing system summary information will appear.

3.3 Main Settings

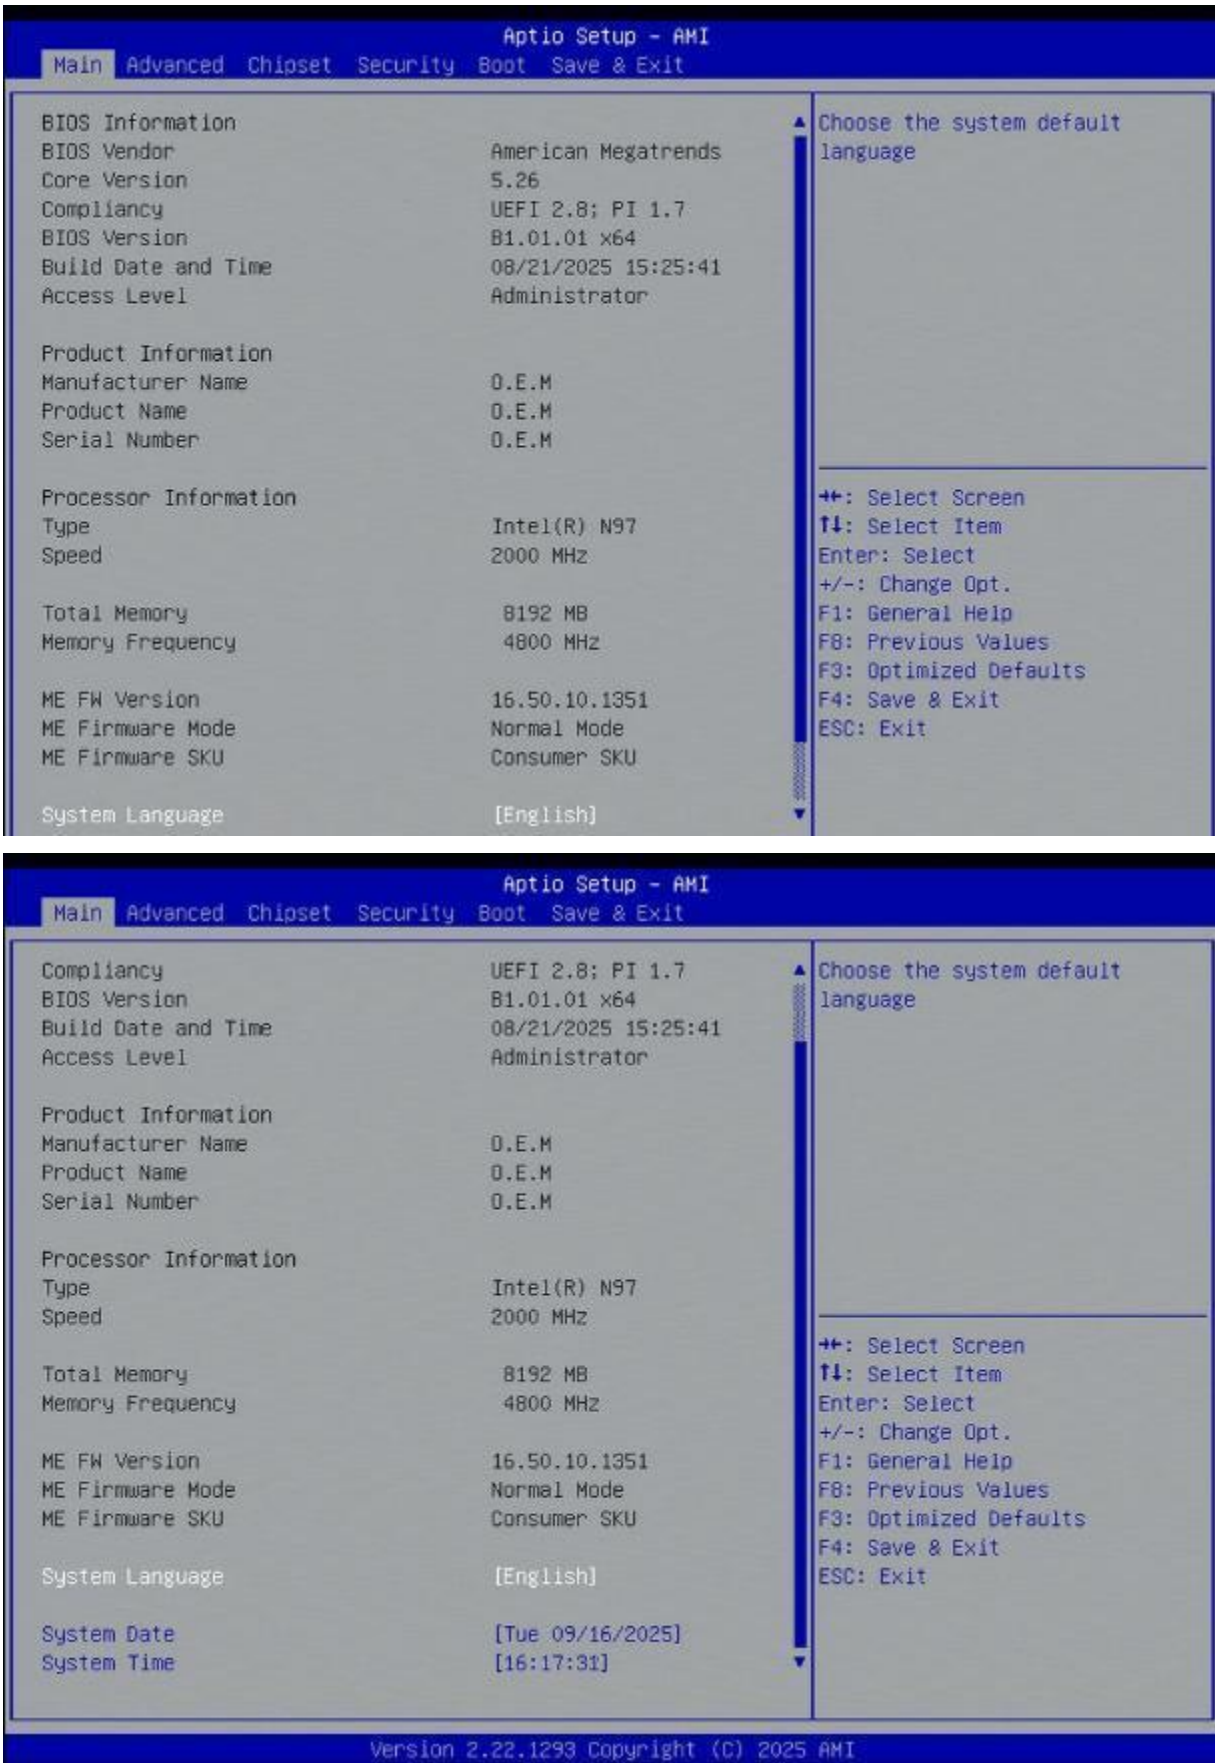

System Time:

Set the system time, the time format is:

Hour : 0 to 23

Minute : 0 to 59

Second : 0 to 59

System Date:

Set the system date, the date format is:

Day: Note that the 'Day' automatically changes when you set the date.

Month: 01 to 12


Date: 01 to 31

Year: 1998 to 2099


NOTE:

When all selectable items are not listed in the BIOS, it only has two options to "Enabled" or "Disabled".


3.4 Advanced Settings

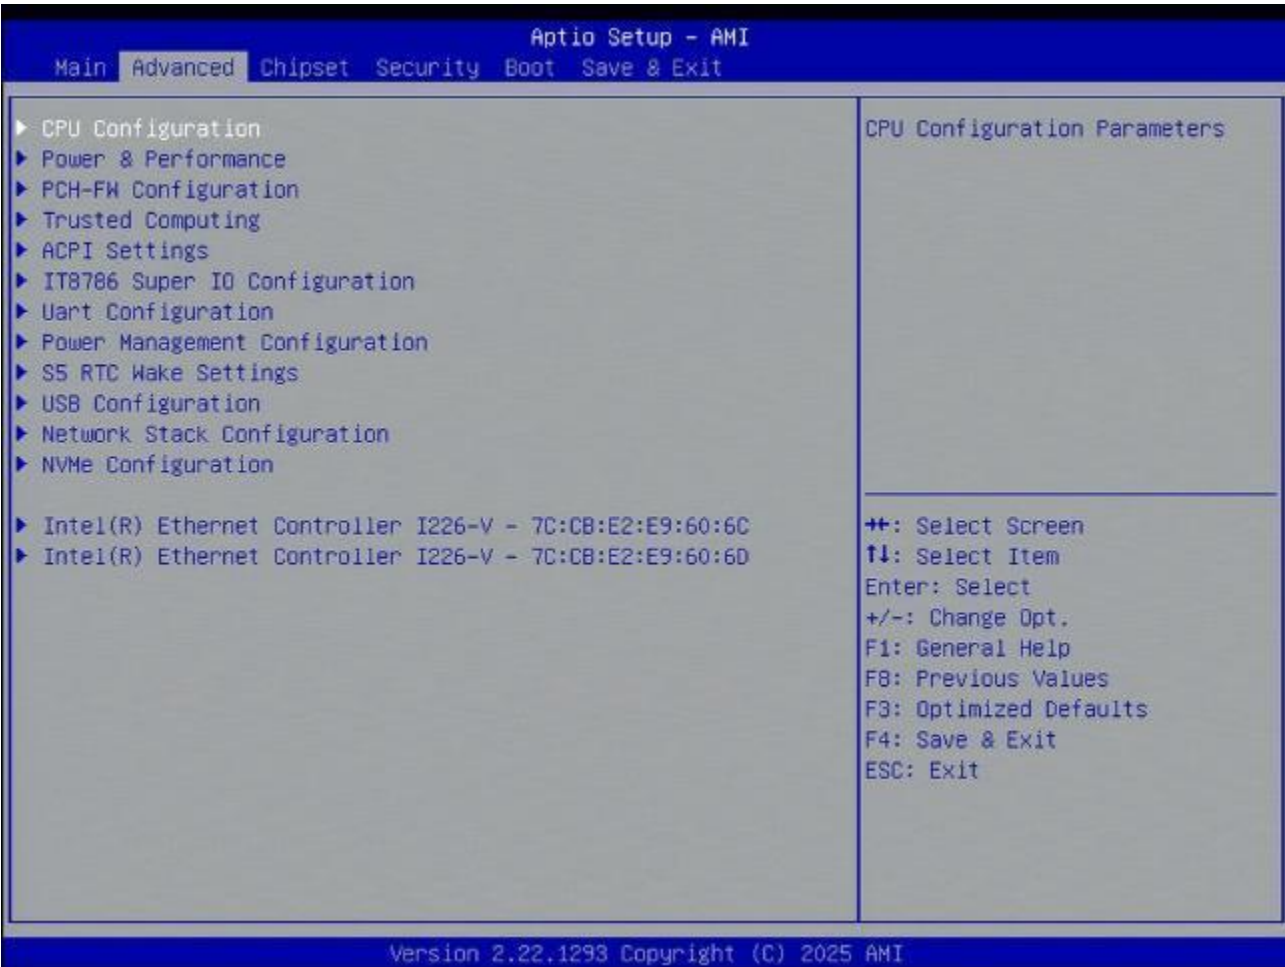


3.4.1 CPU Configuration

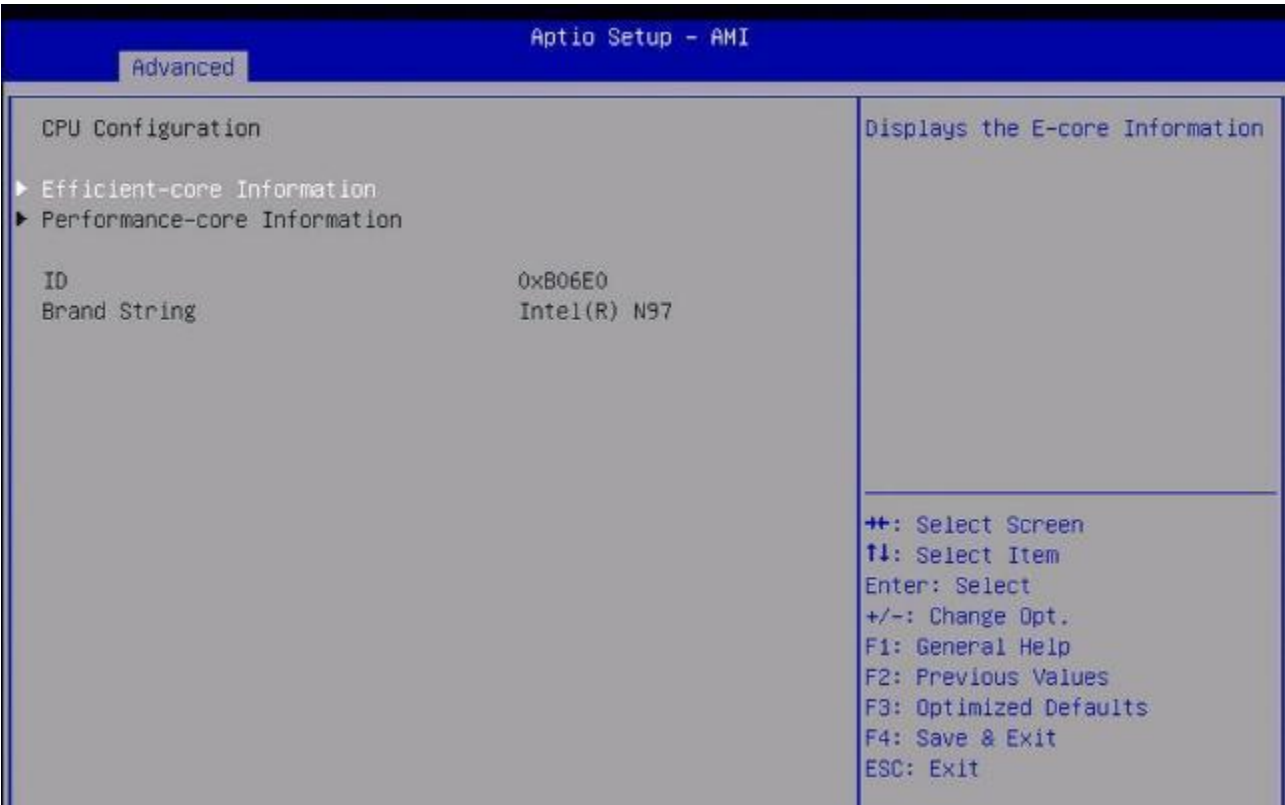


3.4.1.1 Efficient-core Information

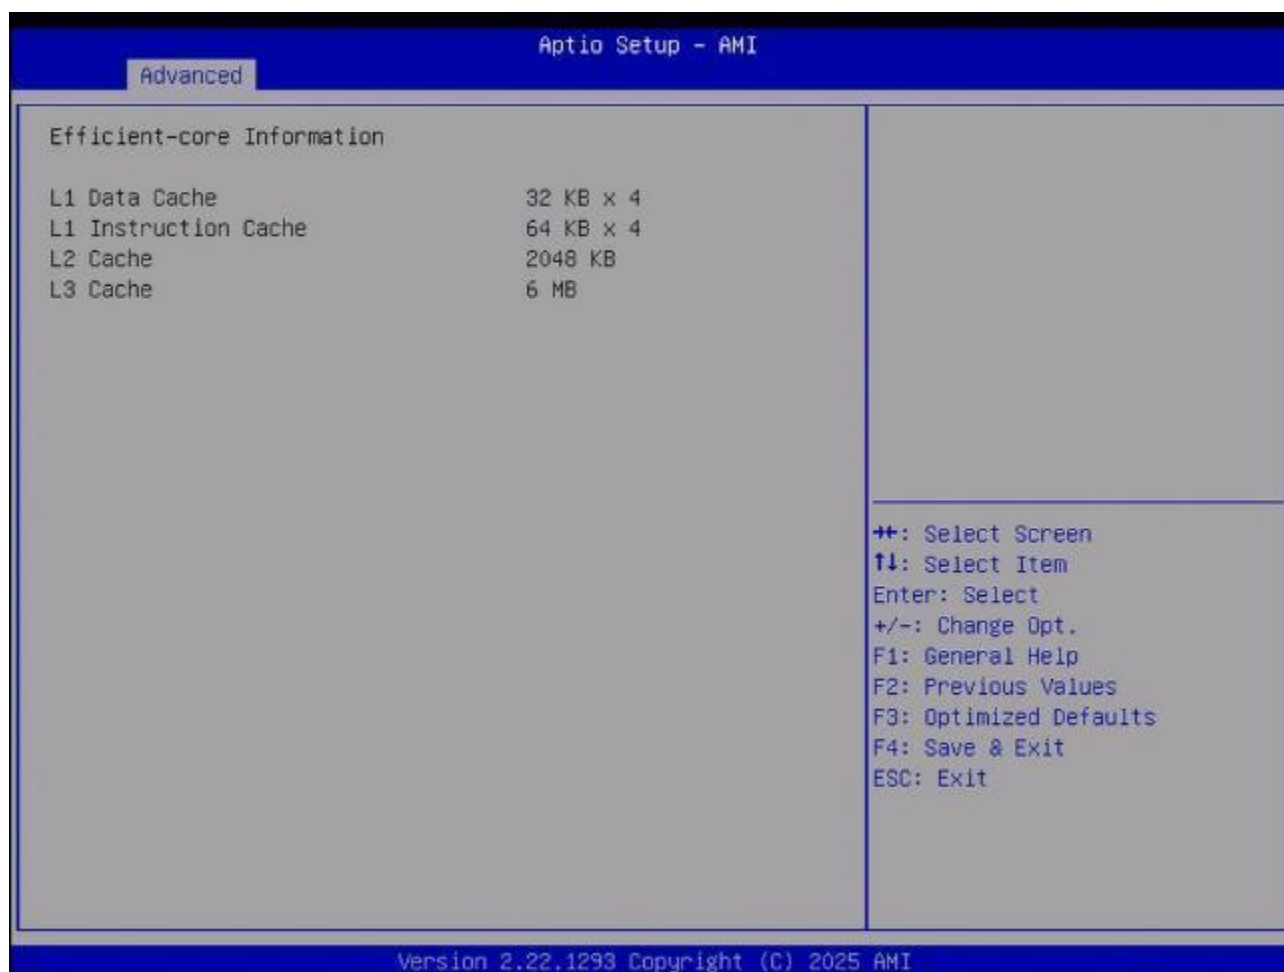

3.4.2 Power & Performance

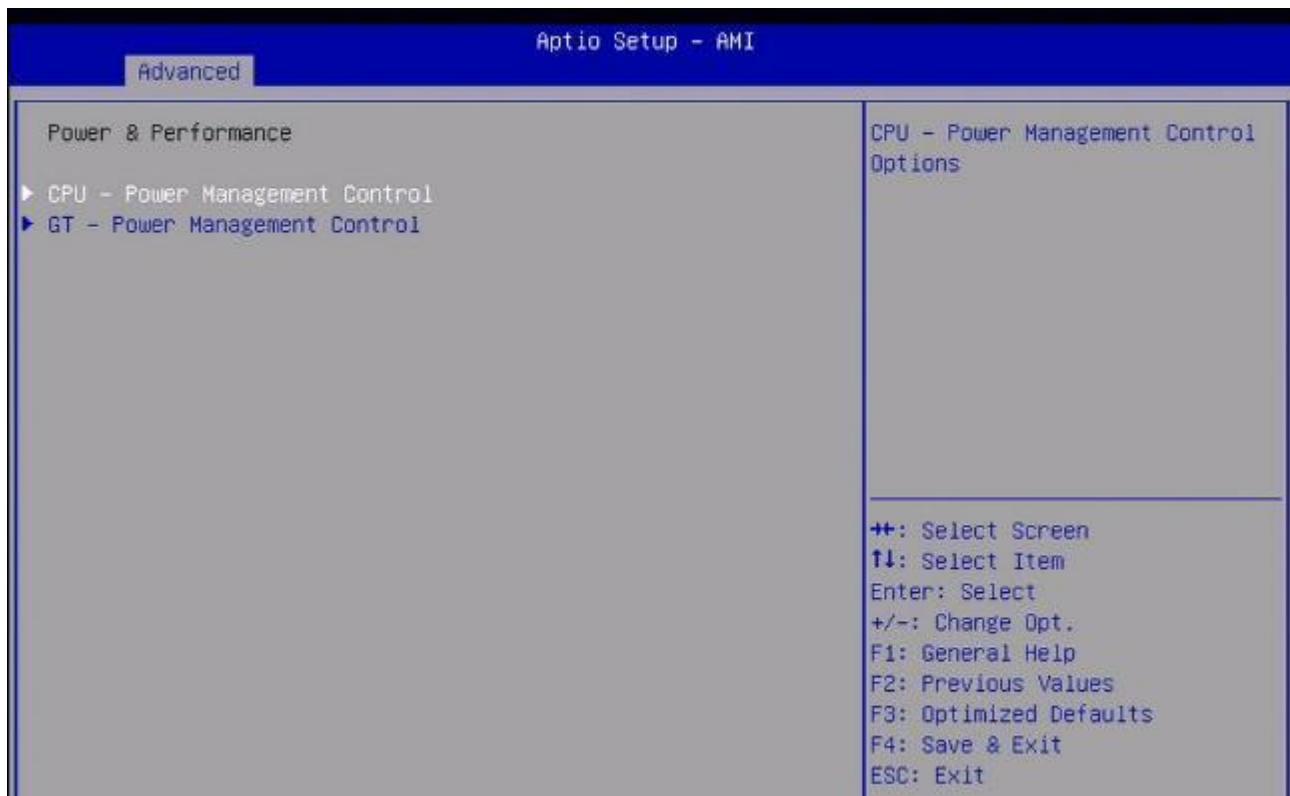

3.4.2.1 CPU-Power Management Control

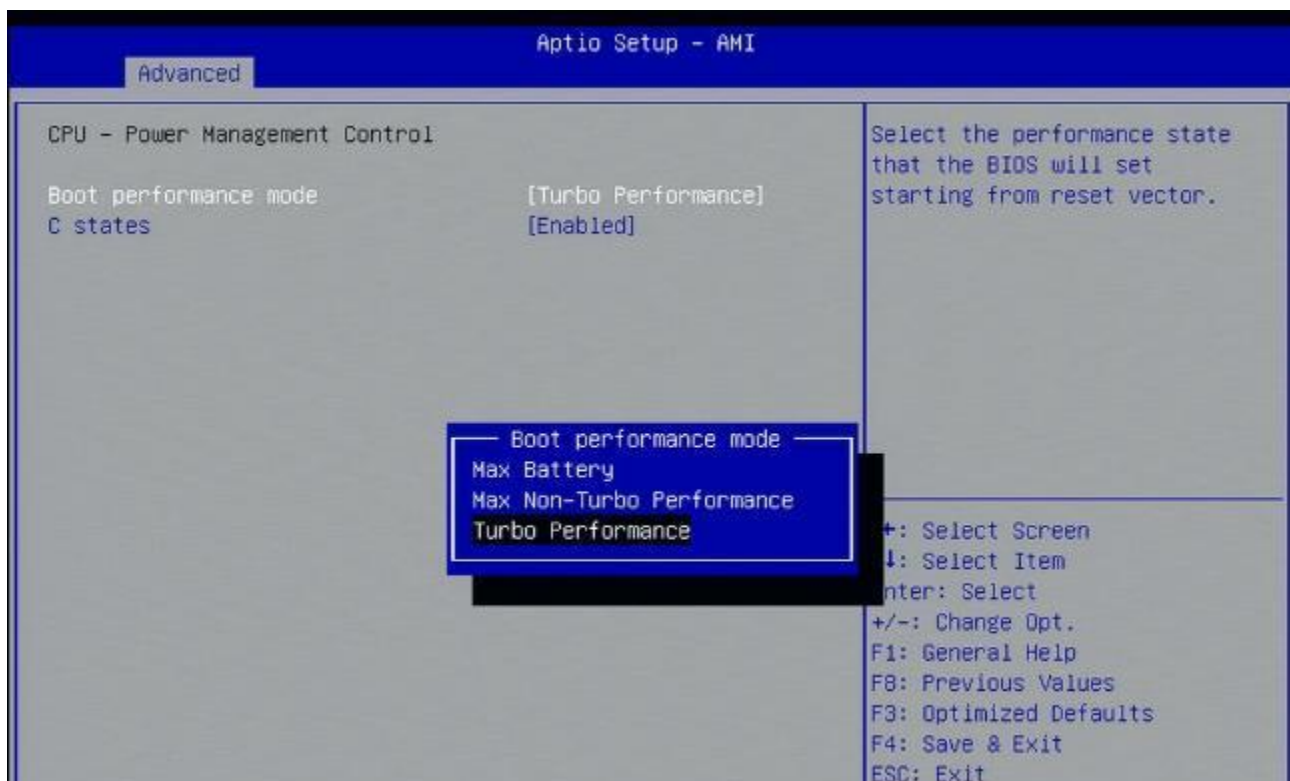


Boot performance mode:

Select the performance state that the BIOS will set starting from reset vector.


Turbo Mode:

Enable/Disable processor Turbo Mode (requires EMTTM enabled too). AUTO means enabled.

3.4.2.1.1 Boot performance mode

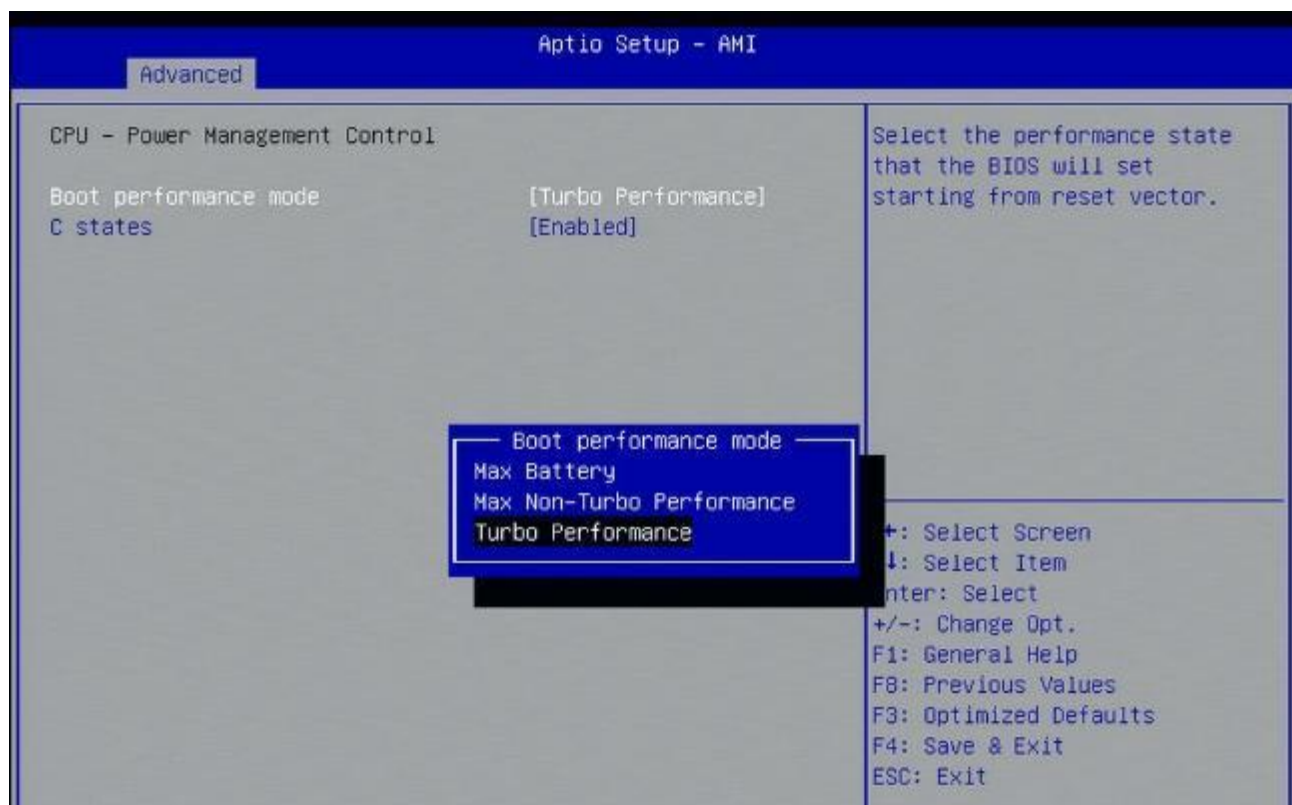


3.4.2.2 GT- Power Management Control

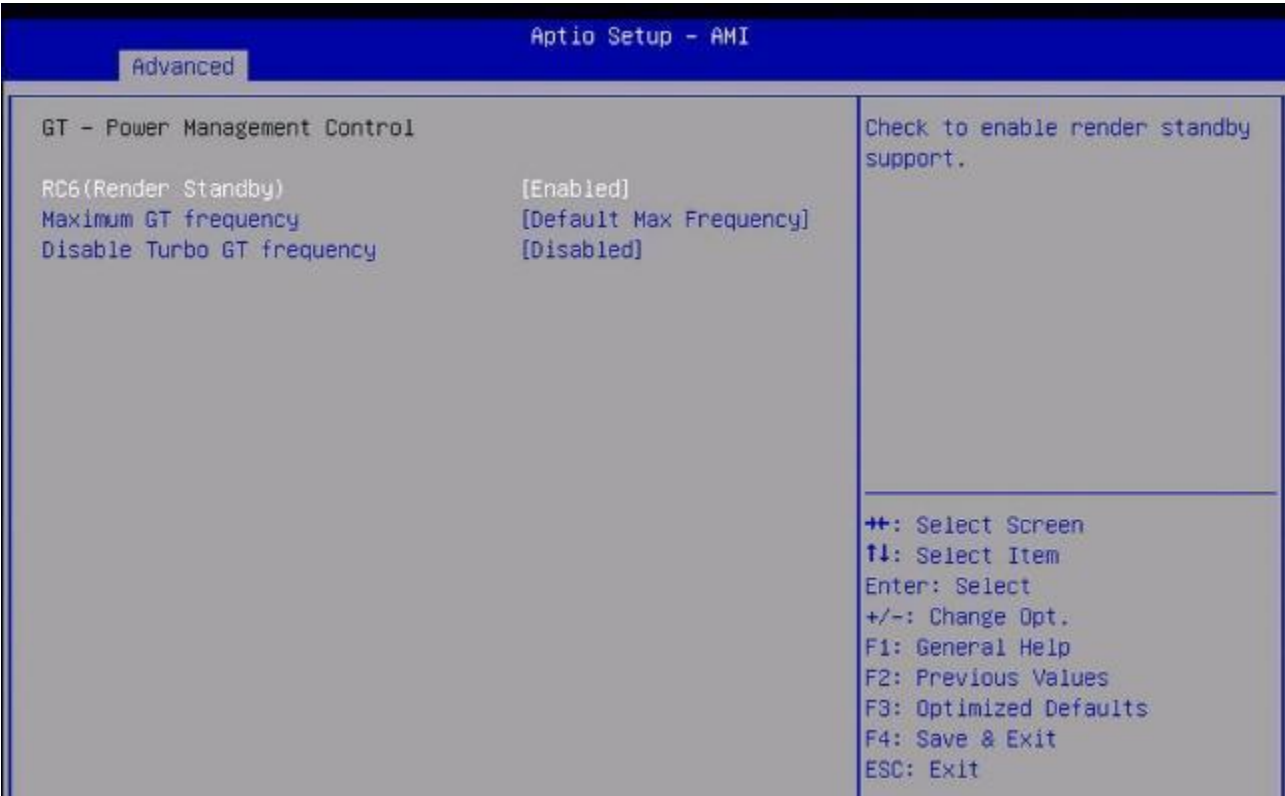


RC6(Render Standby):

Check to enable render standby support.

Maximum GT frequency

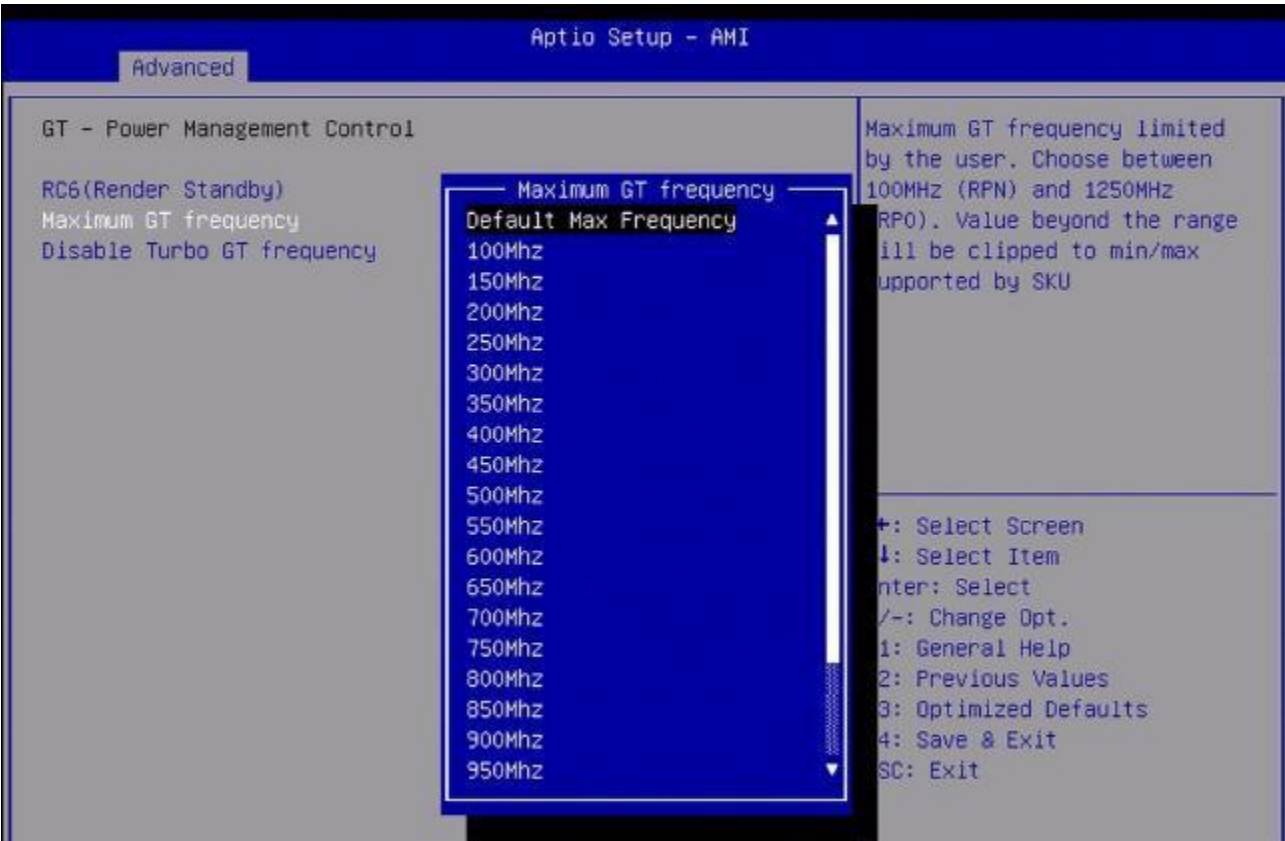


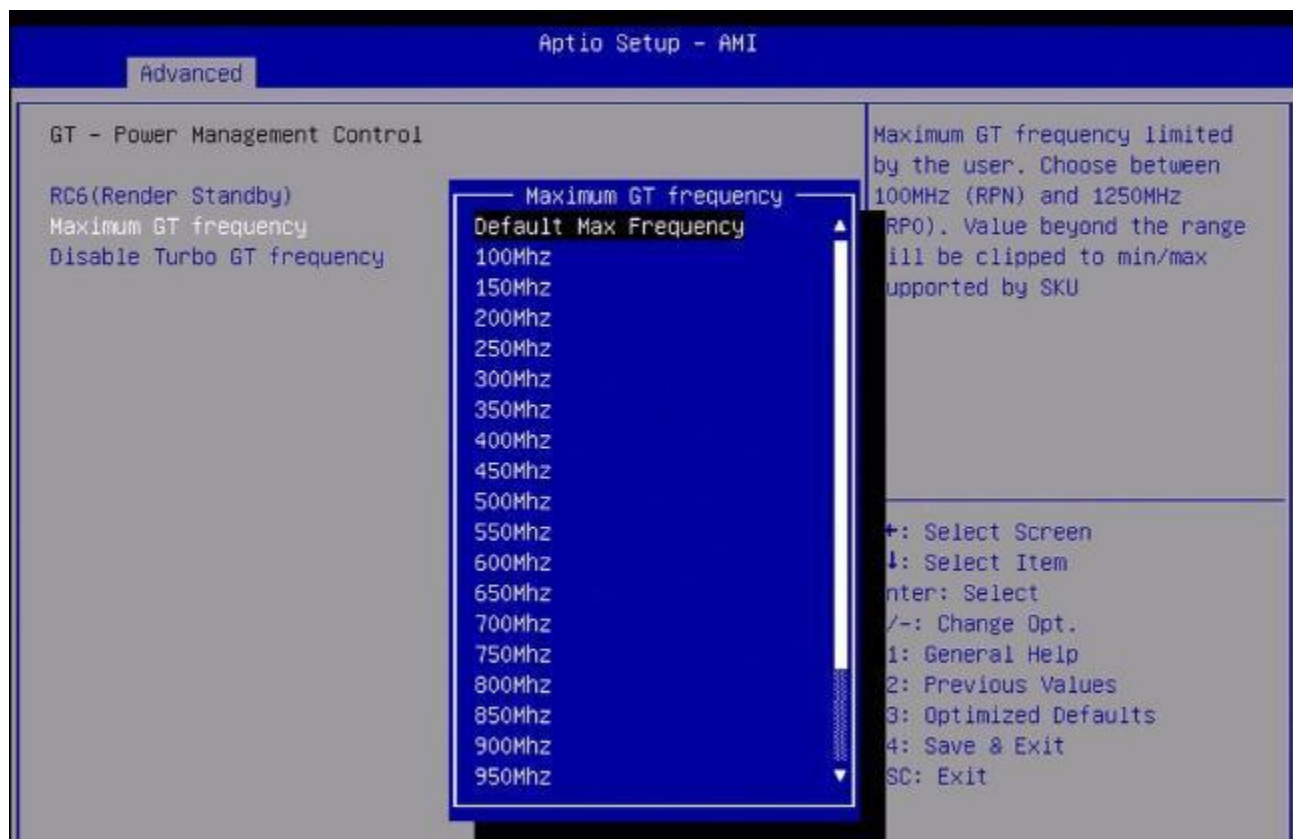


Disable Turbo GT frequency:

Enabled: Disables Turbo GT frequency. Disabled: GT frequency is not limited


3.4.3 PCH-FW Configuration

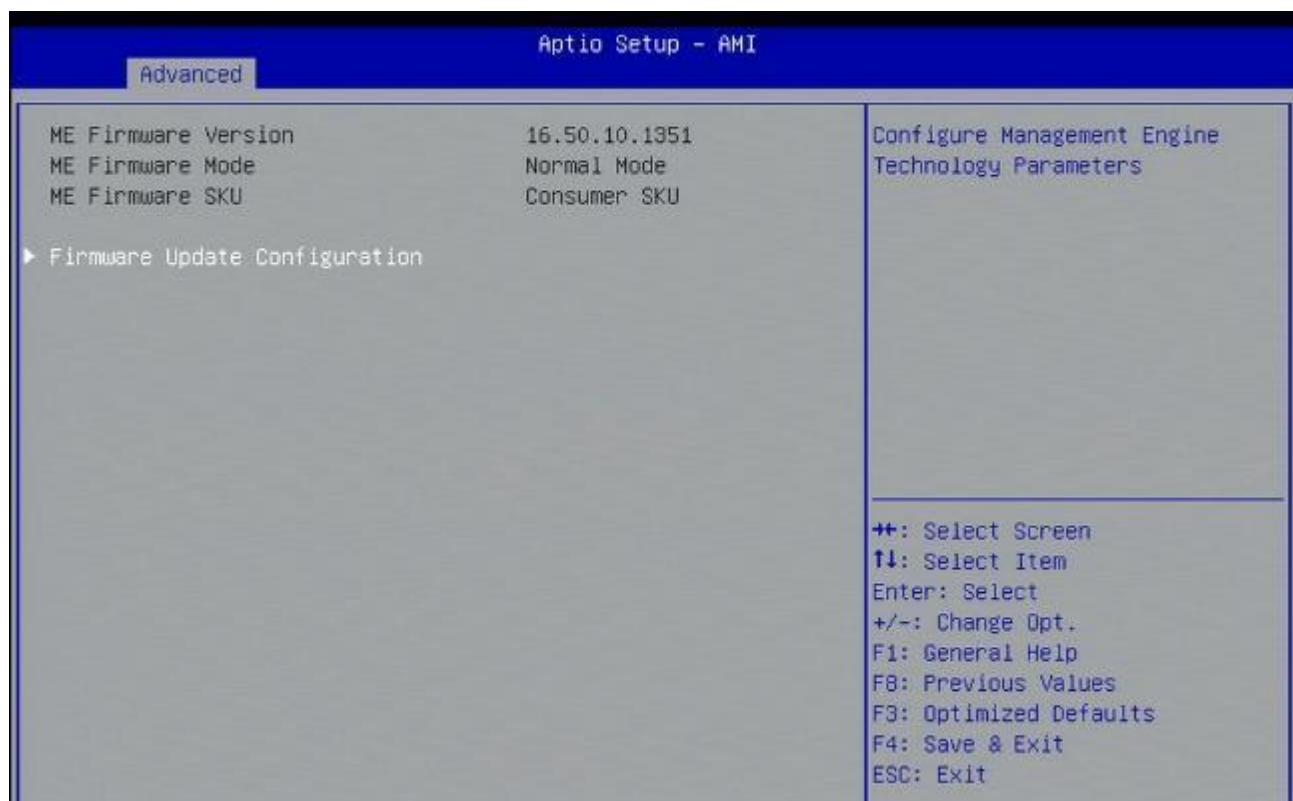

3.4.3.1 Firmware Update Configuration

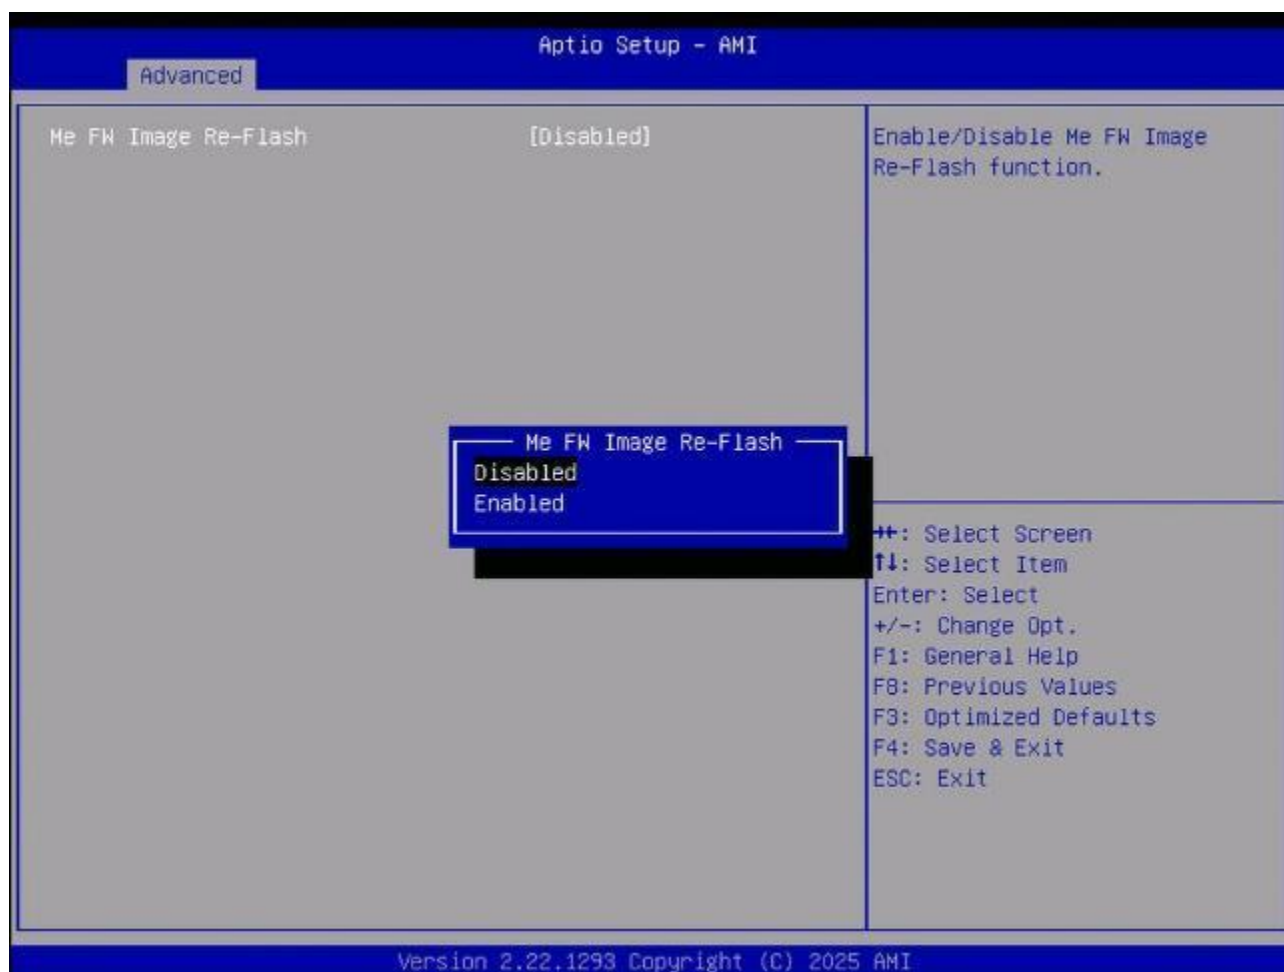

3.4.4 Trusted Computing

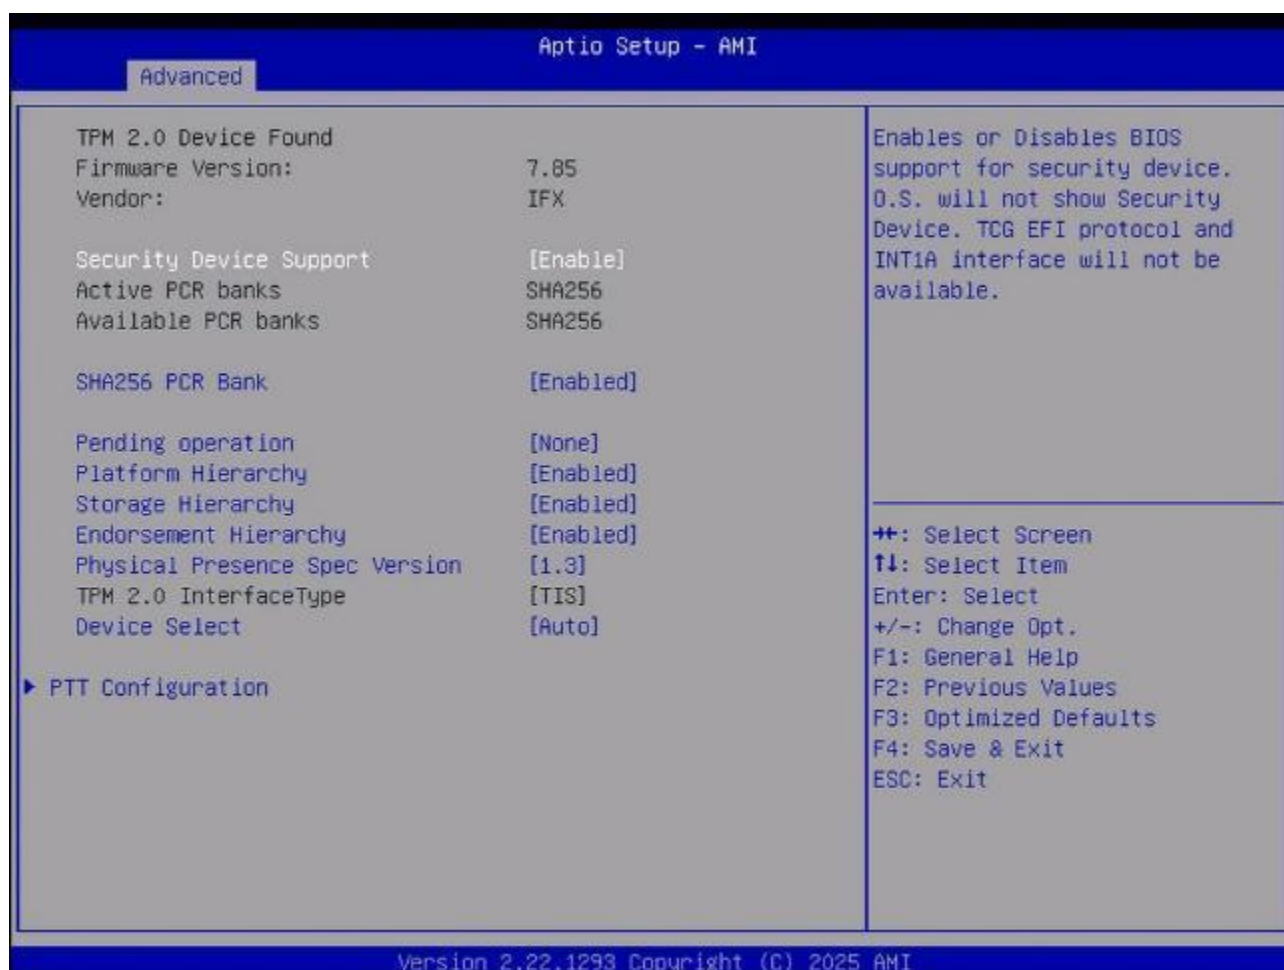

Security Device support:

Enables or Disables BIOS support for security device. o.S. will not show Security Device. TCG EFI protocol and INT1A interface will not be available.

SHA256 PCR Bank:

Enable or Disable SHA256 PCR Bank


Pending operation:

Schedule an Operation for the Security Device. NOTE: Your Computer will reboot during restart in order to change State of Security Device.


Device Select:

TPM1.2 will restrict support to TPM 1.2 devices, TPM 2.0 will restrict support to TPM 2.0 devices, Auto will support both with the default set to TPM 2.0 devices if not found, TPM 1.2 devices will be enumerated


3.4.4.1 Pending operation

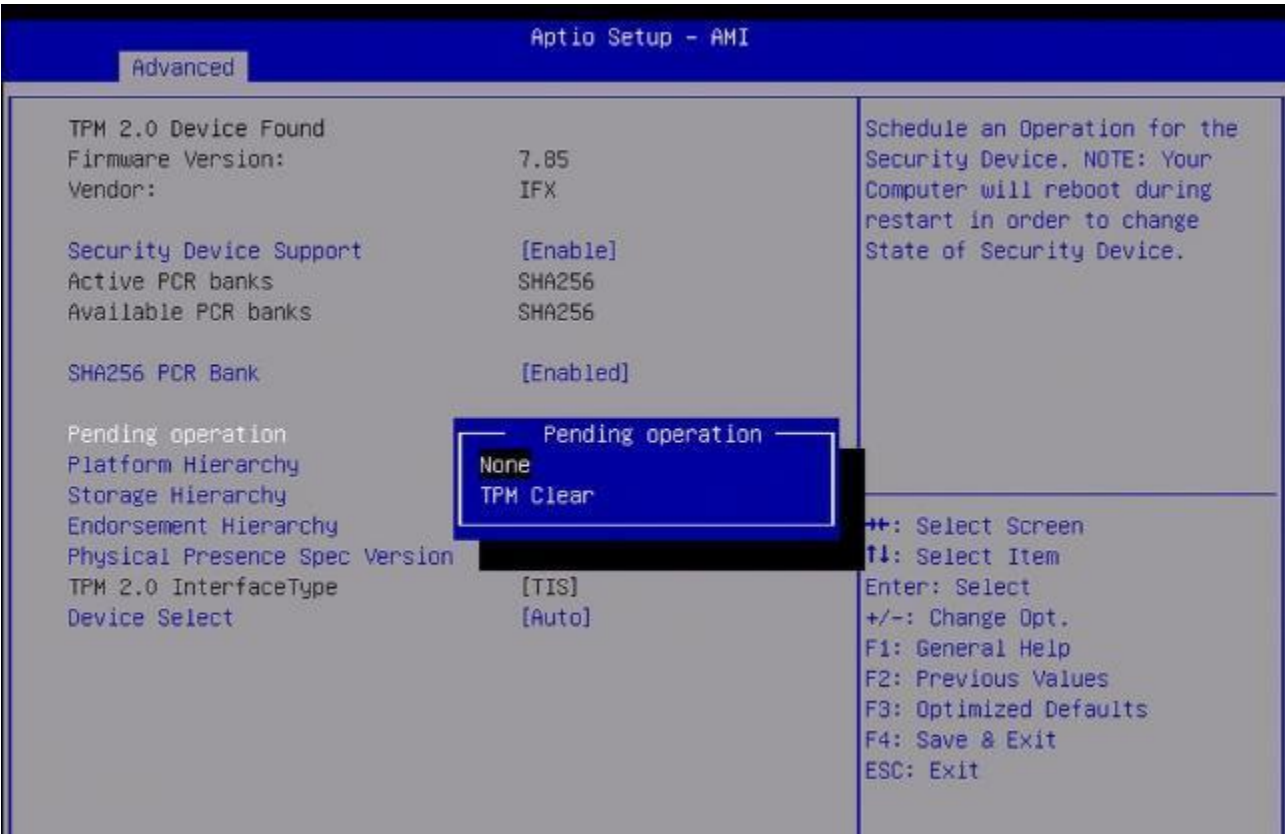


3.4.4.2 Physical Presence Spec Version

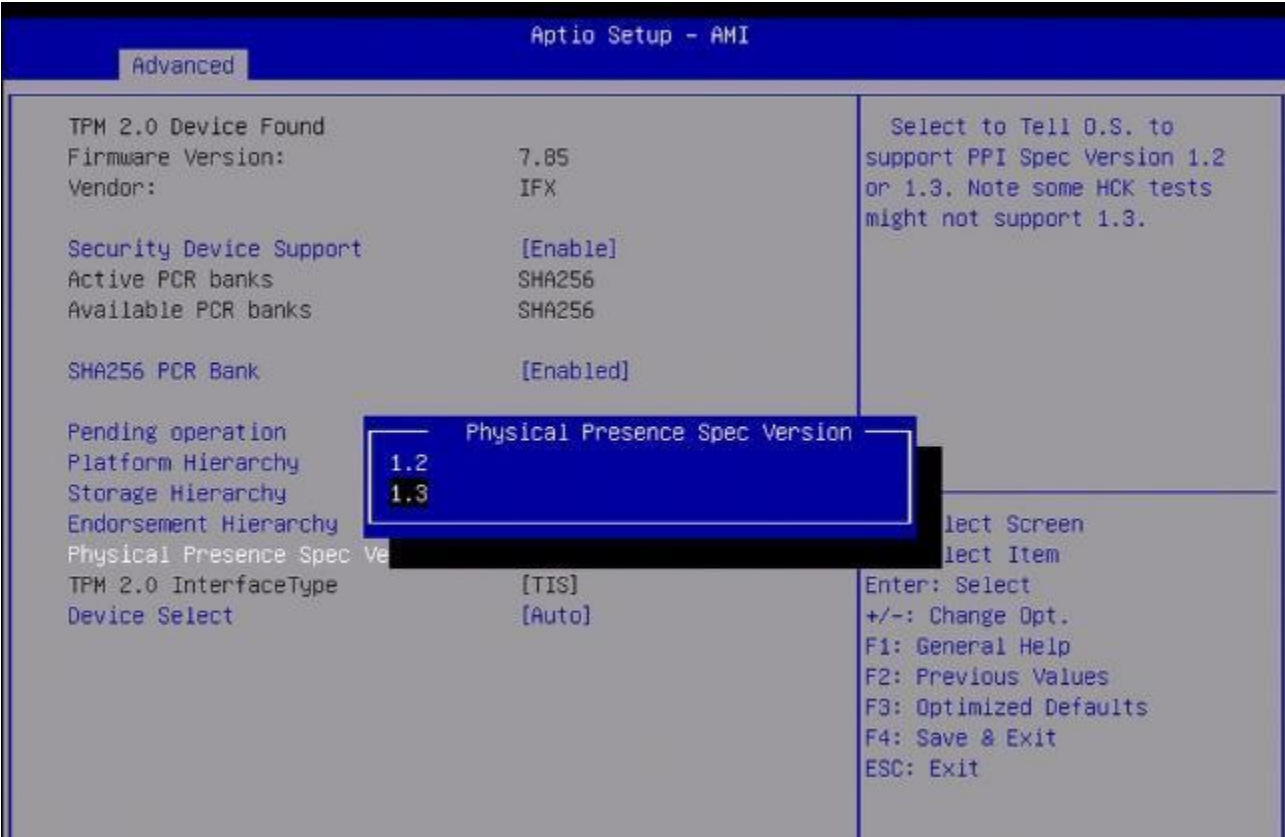

3.4.4.3 Device Select

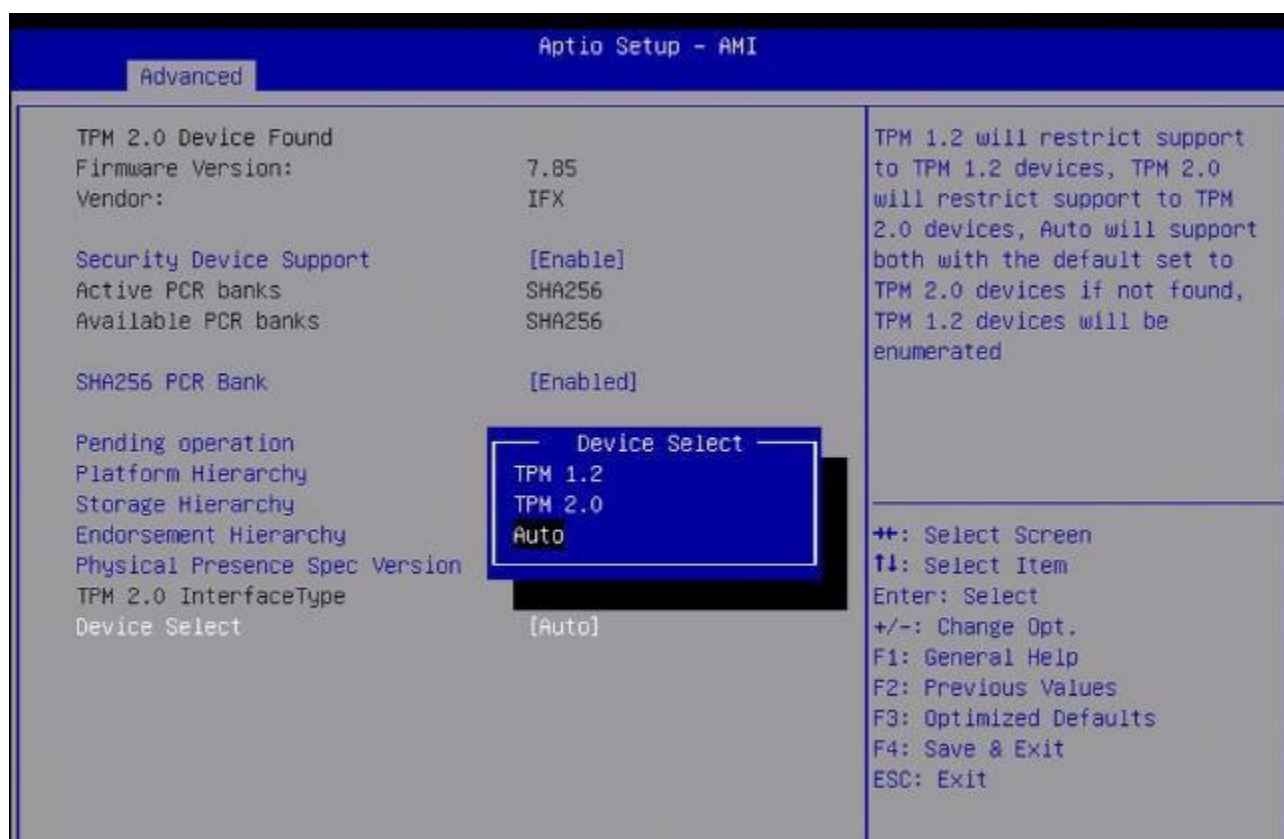

3.4.5 ACPI Settings

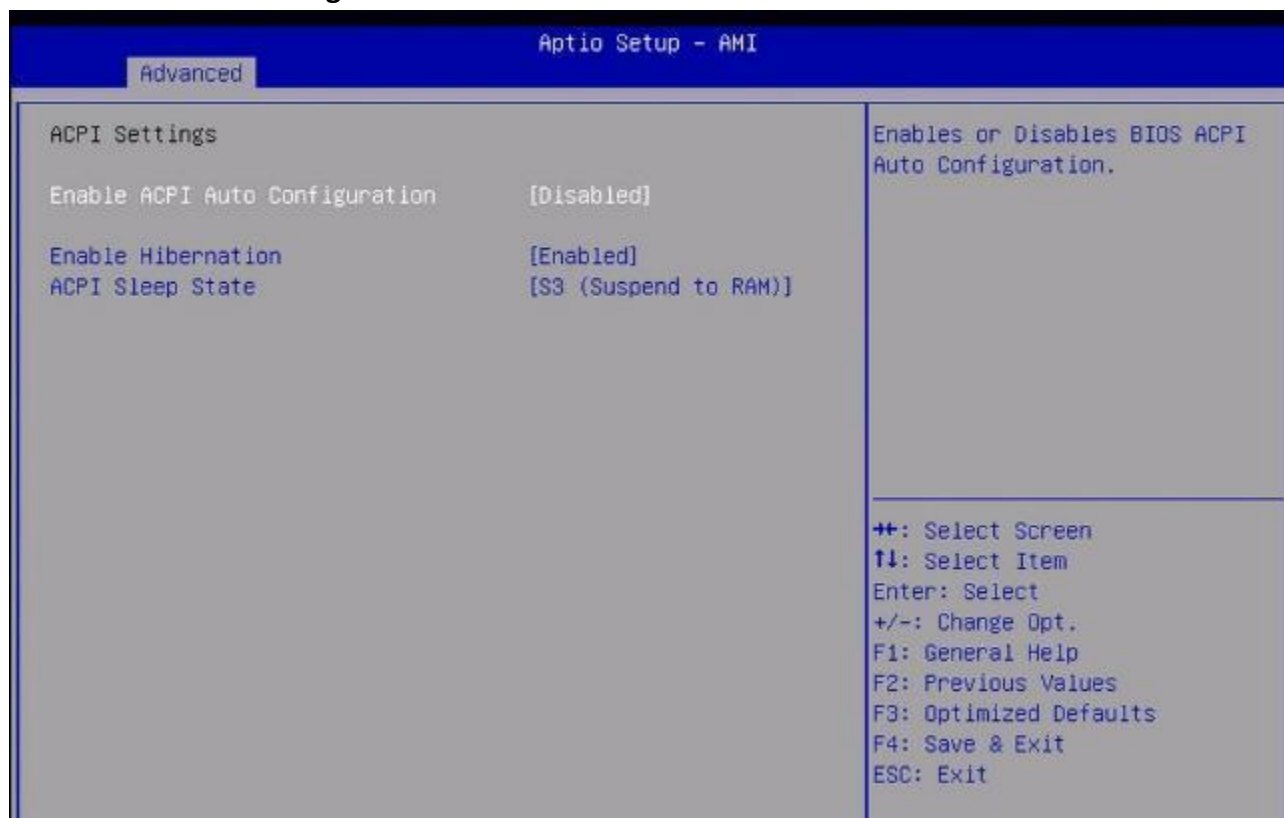


Enable Hibernation:

Enables or Disables System ability to Hibernate(OS/S4 Ssleep State). This option may not be effective with some operating systems.


ACPI Sleep State:

Select the highest ACPI sleep state the system will enter when the SUSPEND button is pressed.


3.4.6 IT8786 Super IO Configuration

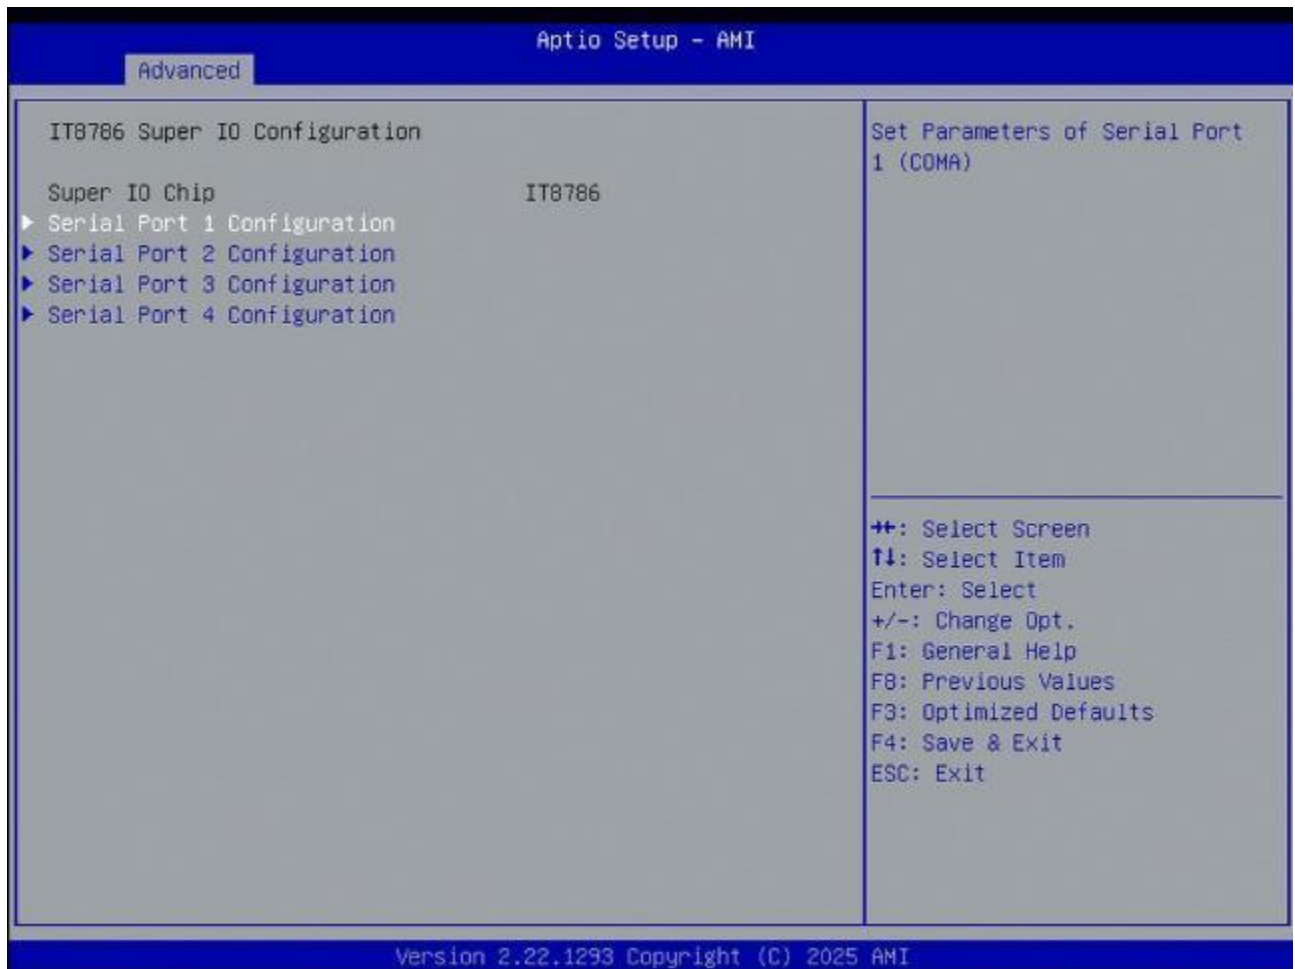


3.4.6.1 Serial Port 1 Configuration

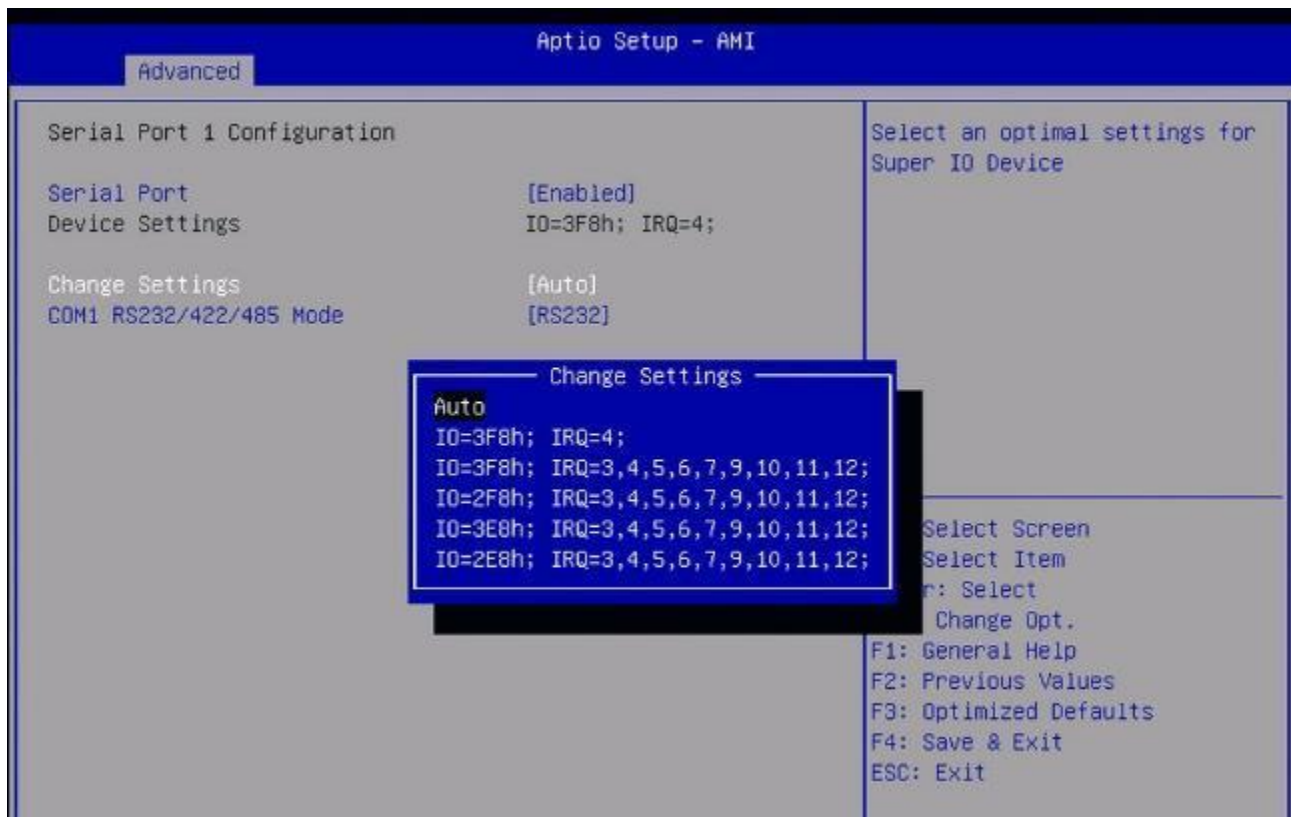


COM1 RS232/422/485 Mode

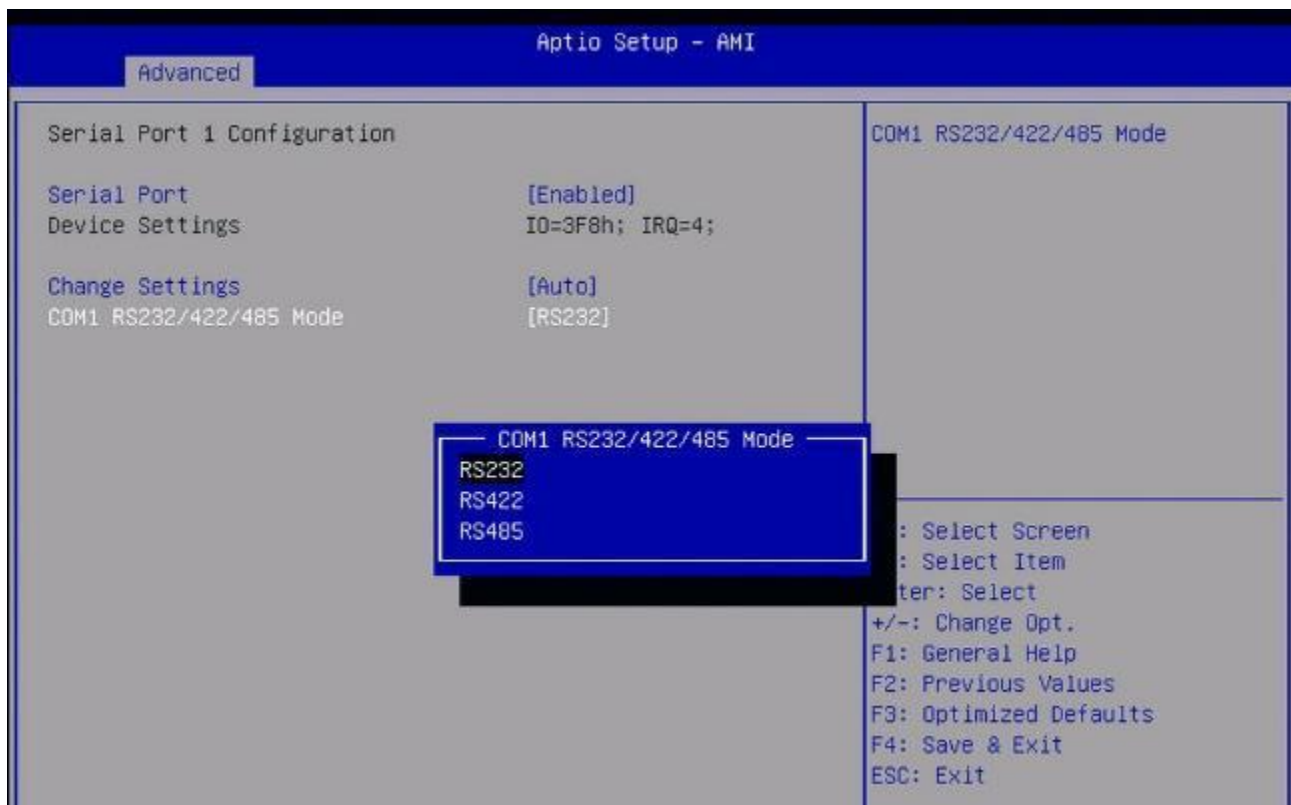


3.4.6.2 Serial Port 2 Configuration

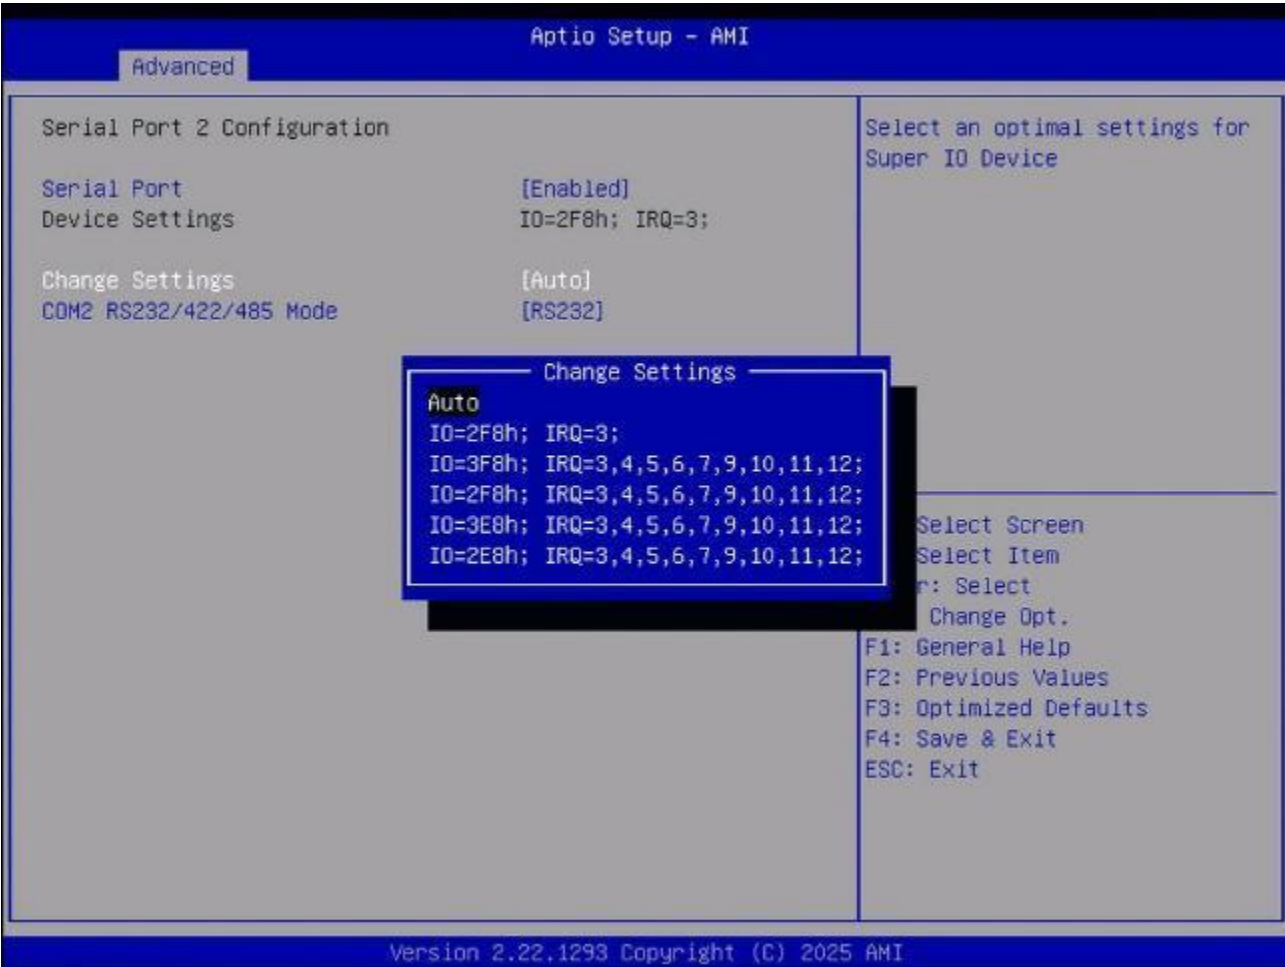


COM2 RS232/422/485 Mode

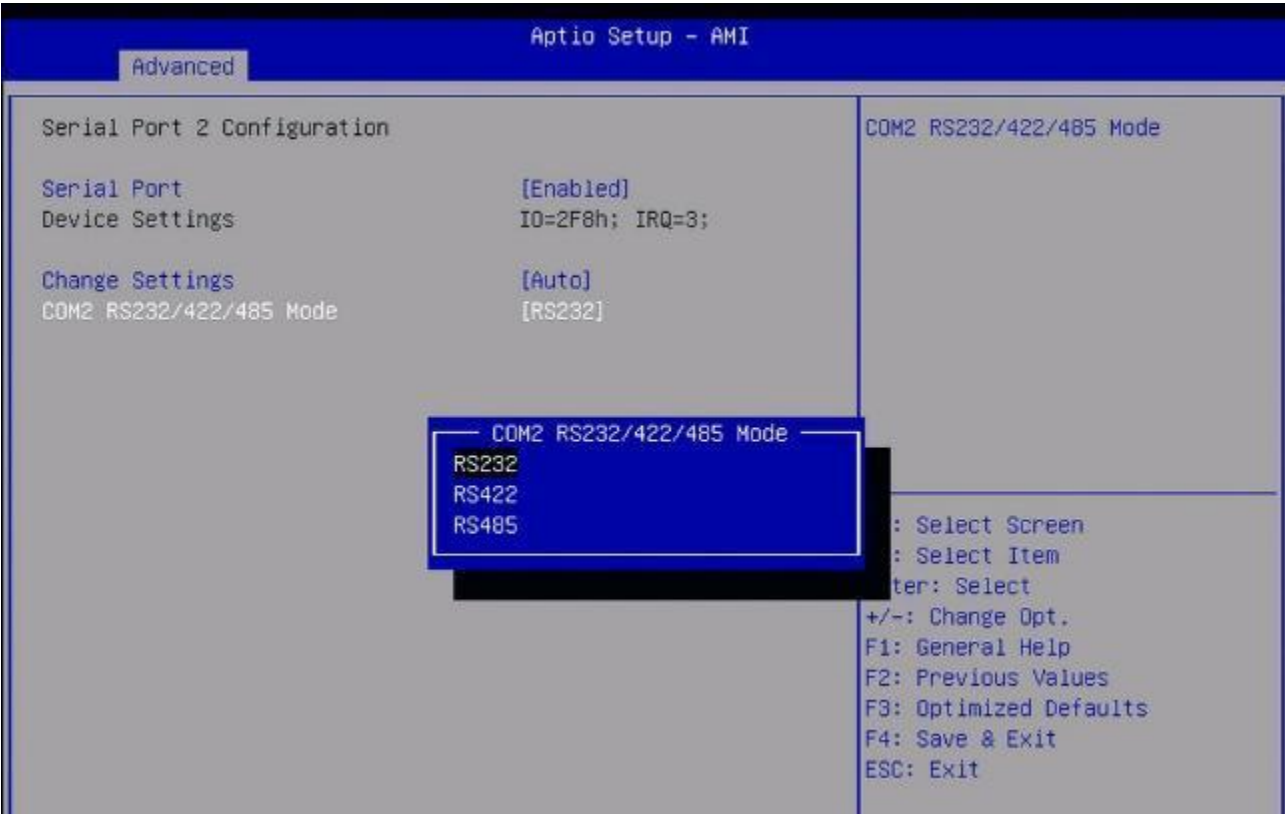


3.4.6.3 Serial Port 3 Configuration

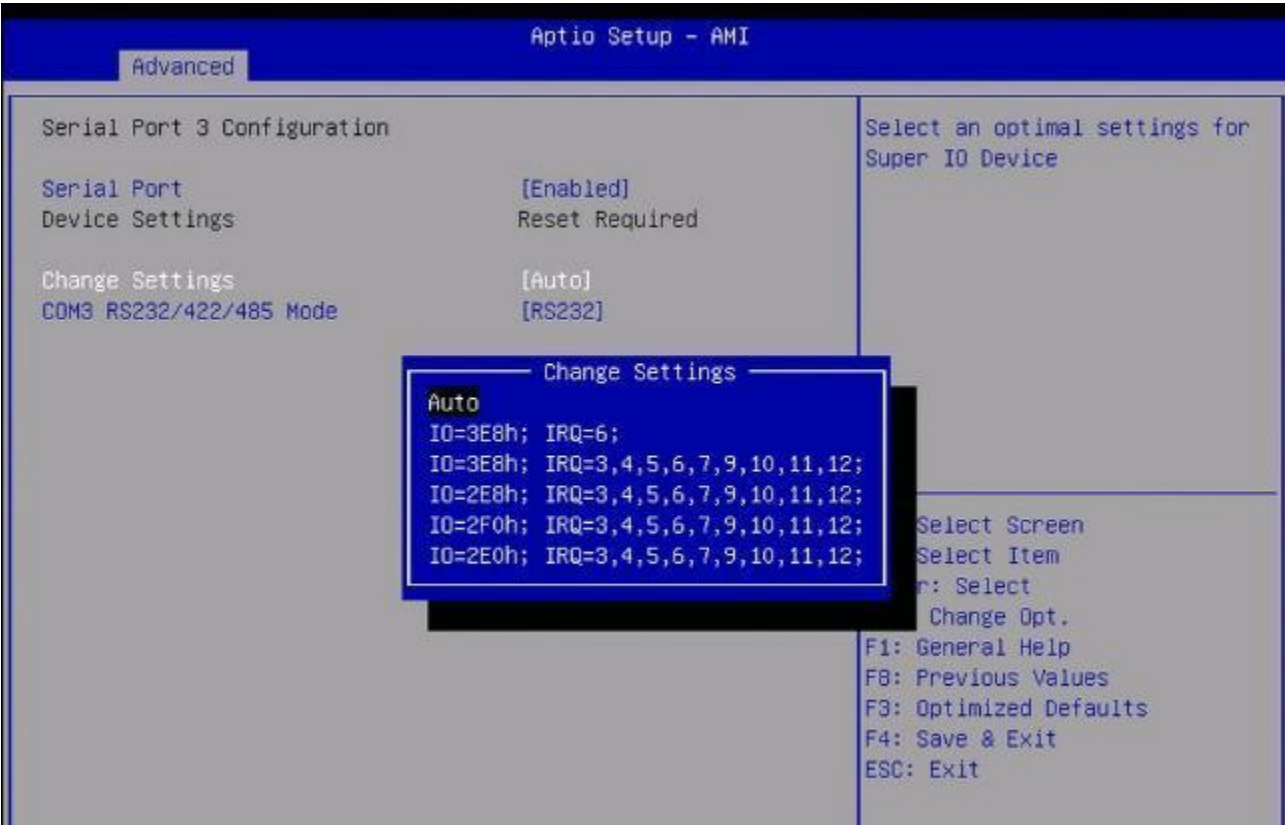


COM3 RS232/422/485 Mode

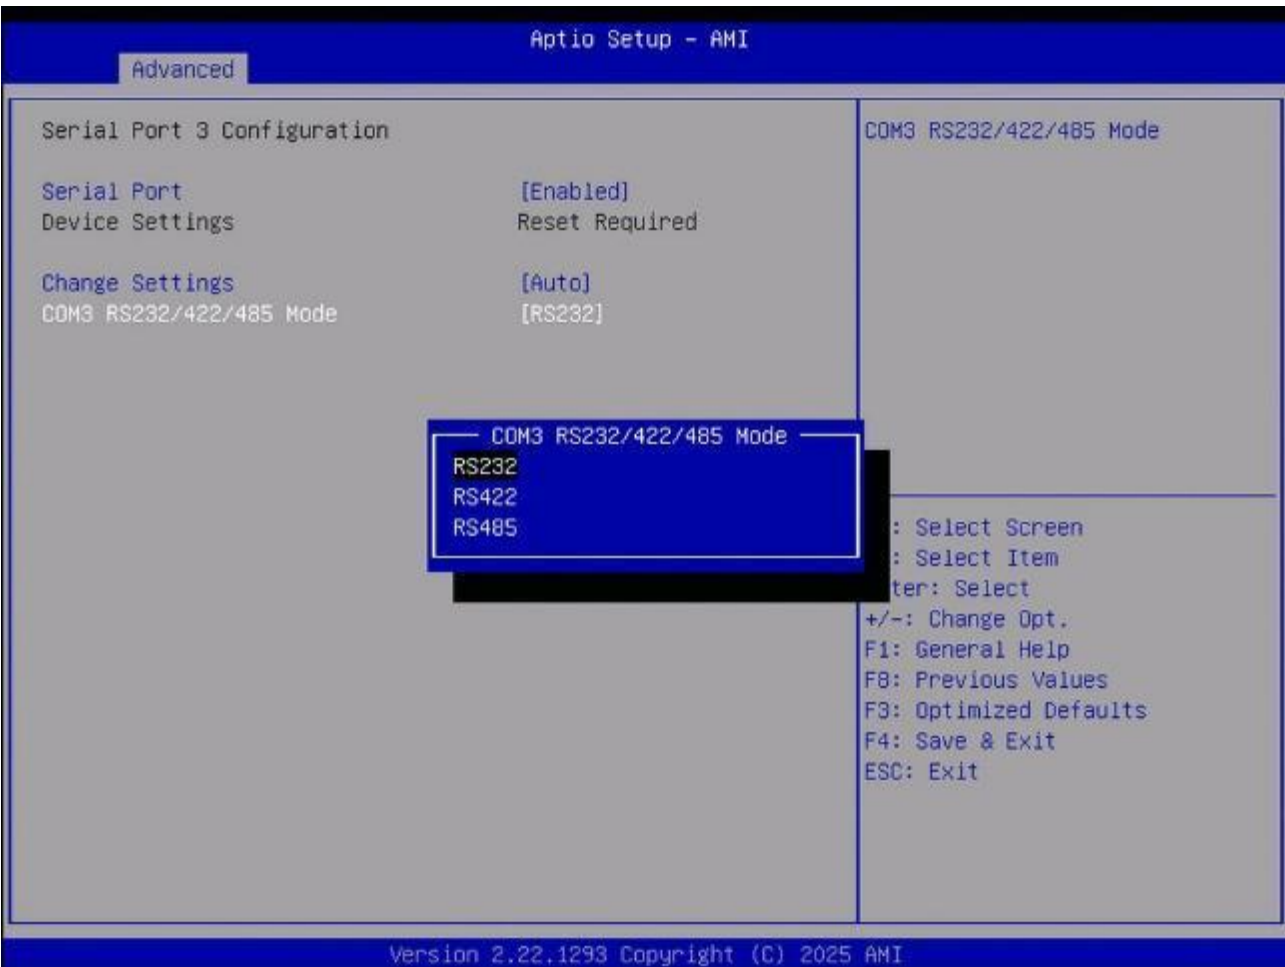


3.4.6.4 Serial Port4 Configuration

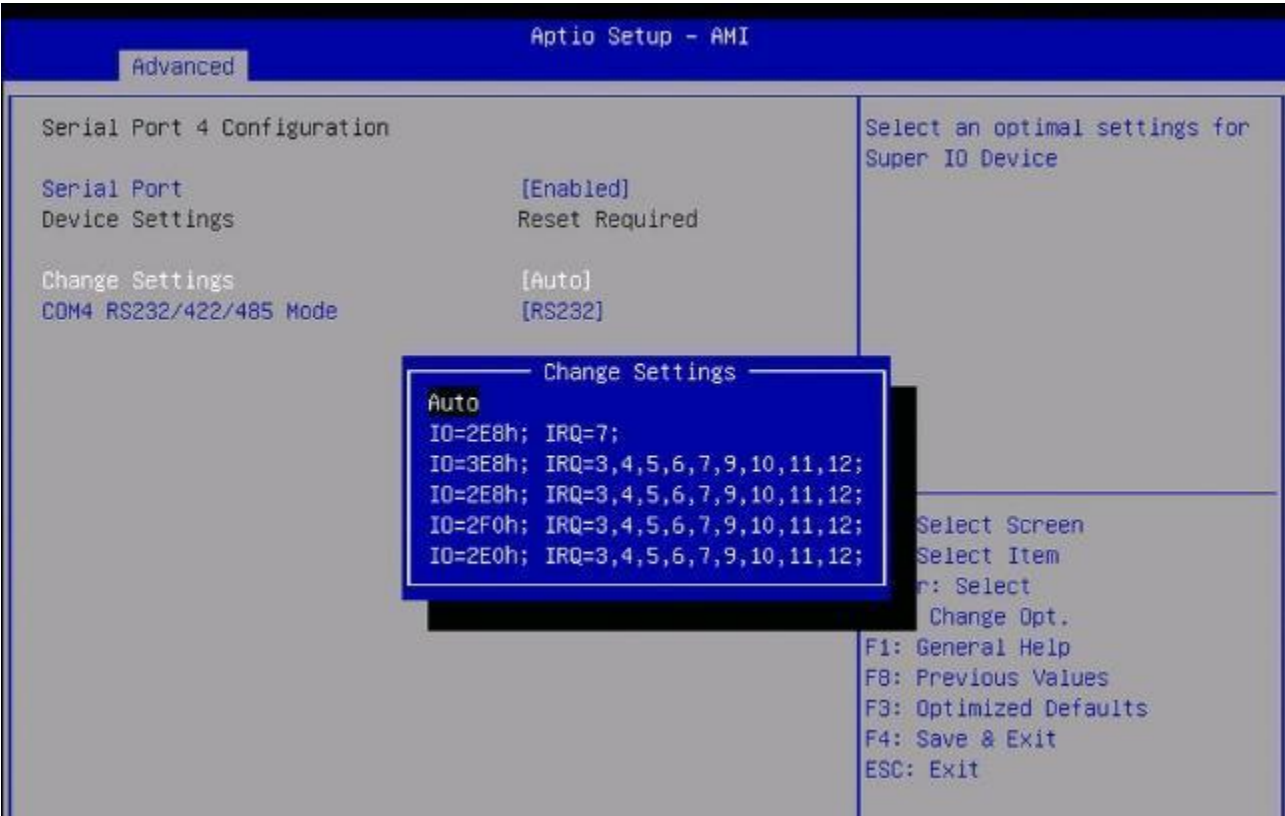


COM4 RS232/422/485 Mode

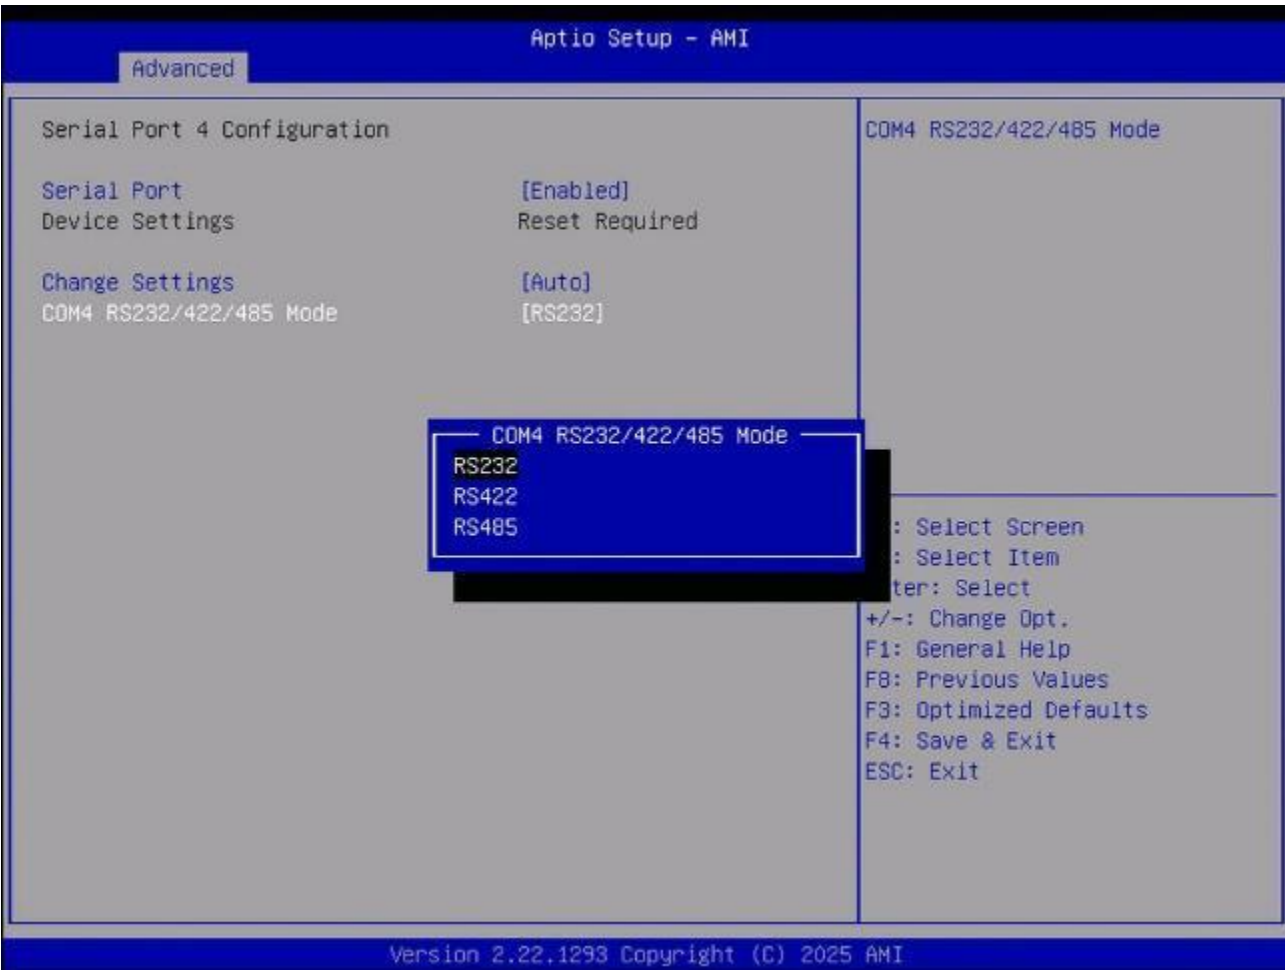


3.4.7 UART Configuration

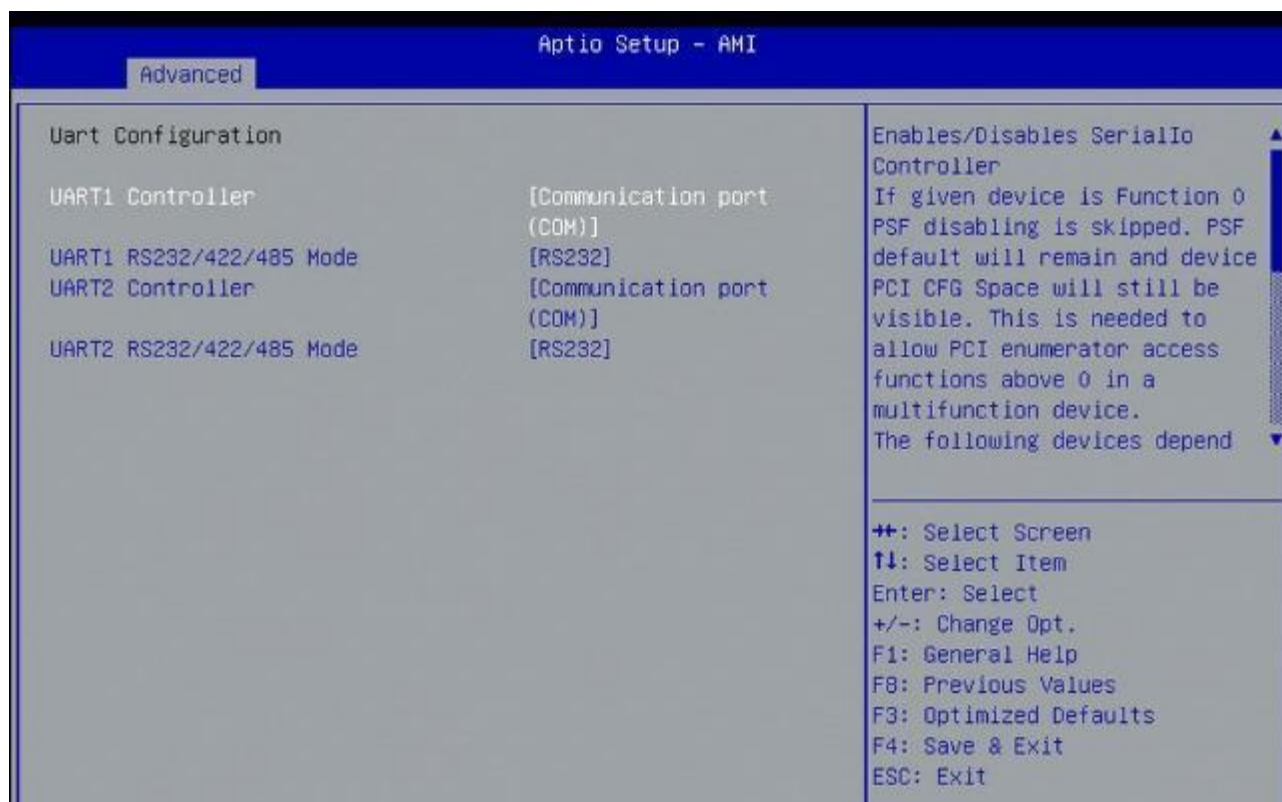

3.4.7.1 UART1 Controller

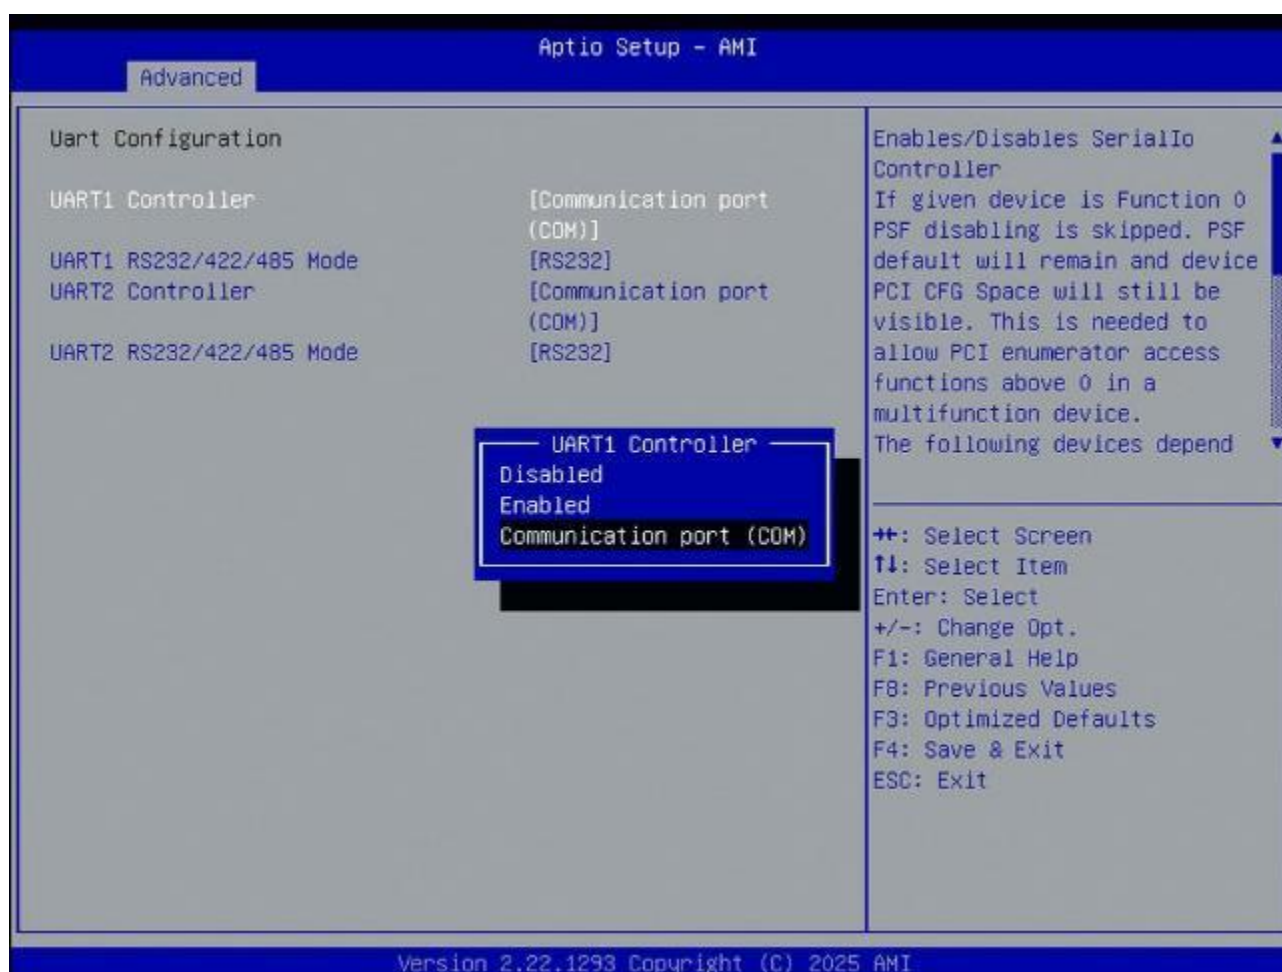


UART1 RS232/422/485 Mode

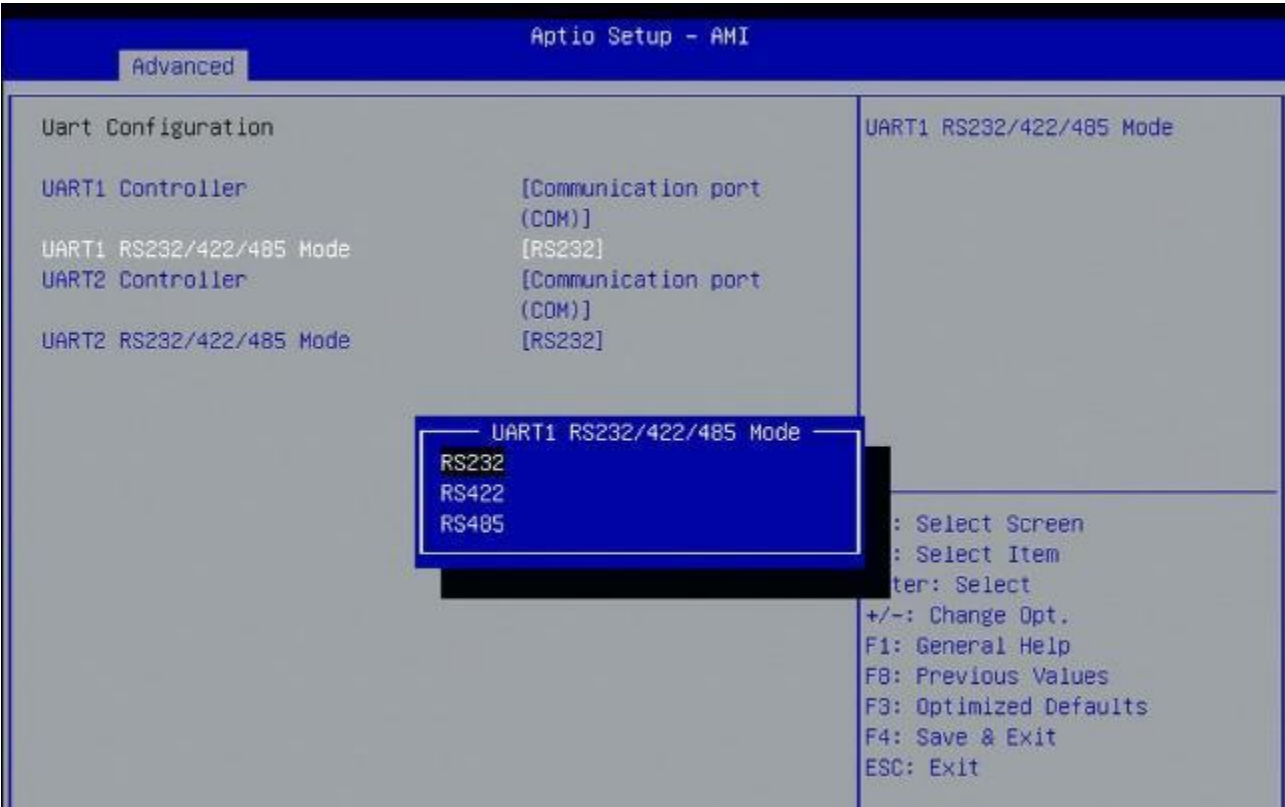


3.4.7.2 UART2 Controller



UART2 RS232/422/485 Mode

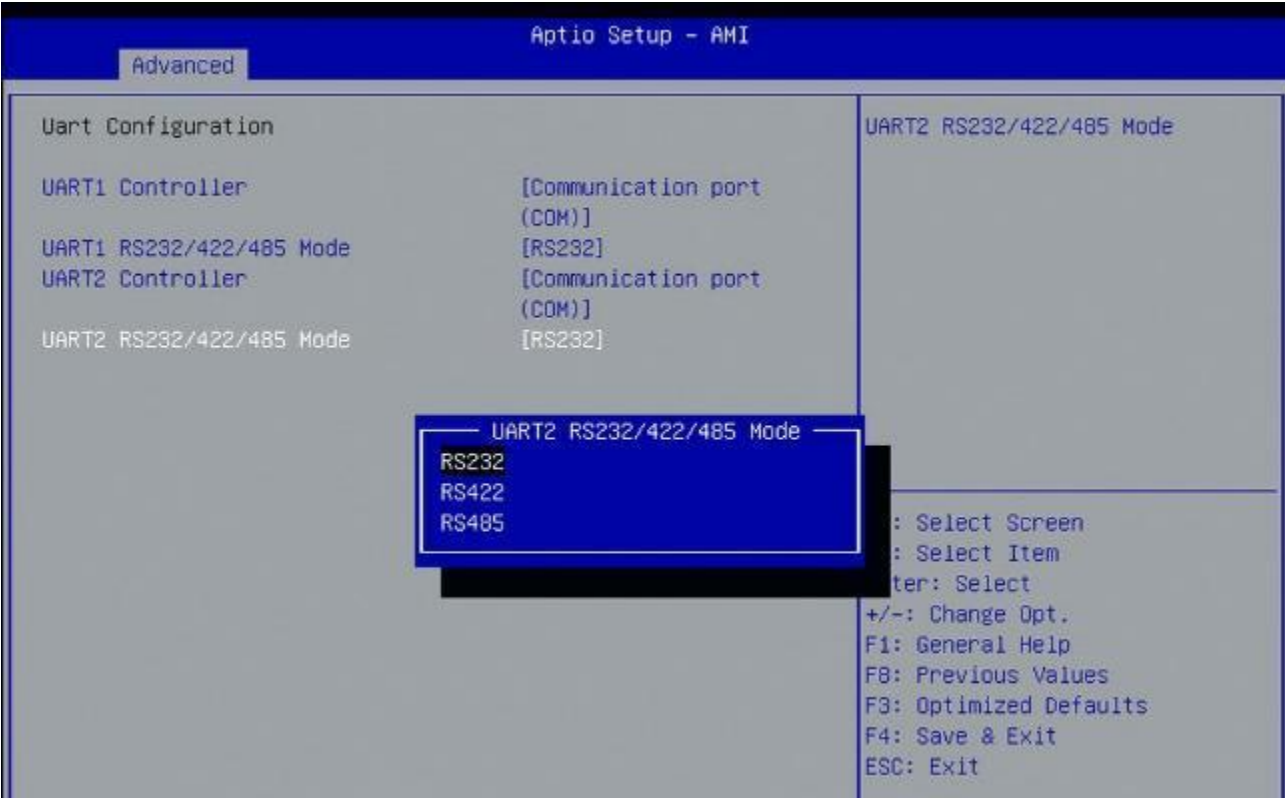

3.4.8 Power Management Configuration

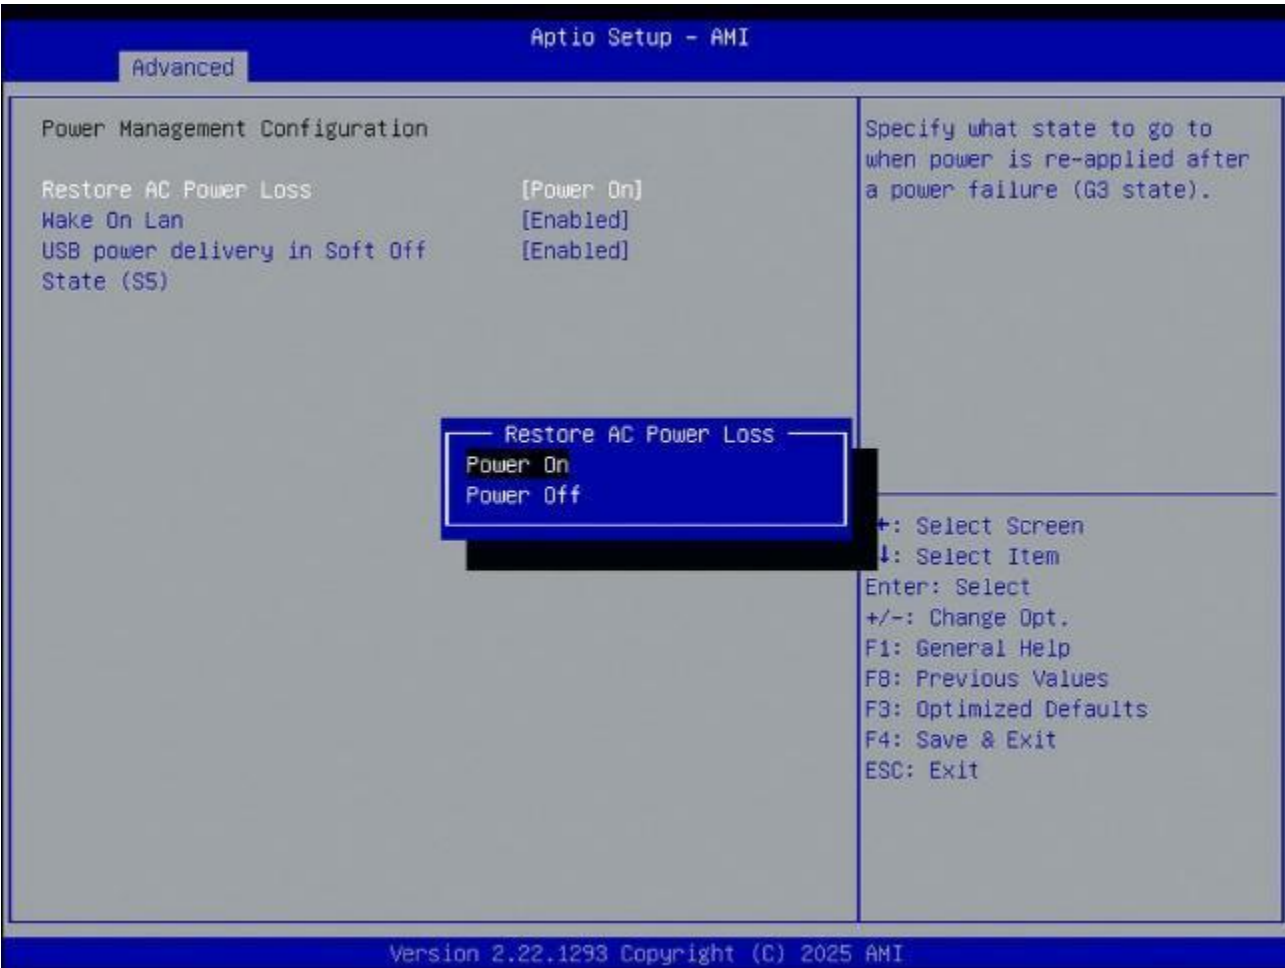




Note:

Restore AC Power Loss: Power ON (Default)


USB Power delivery in Soft off

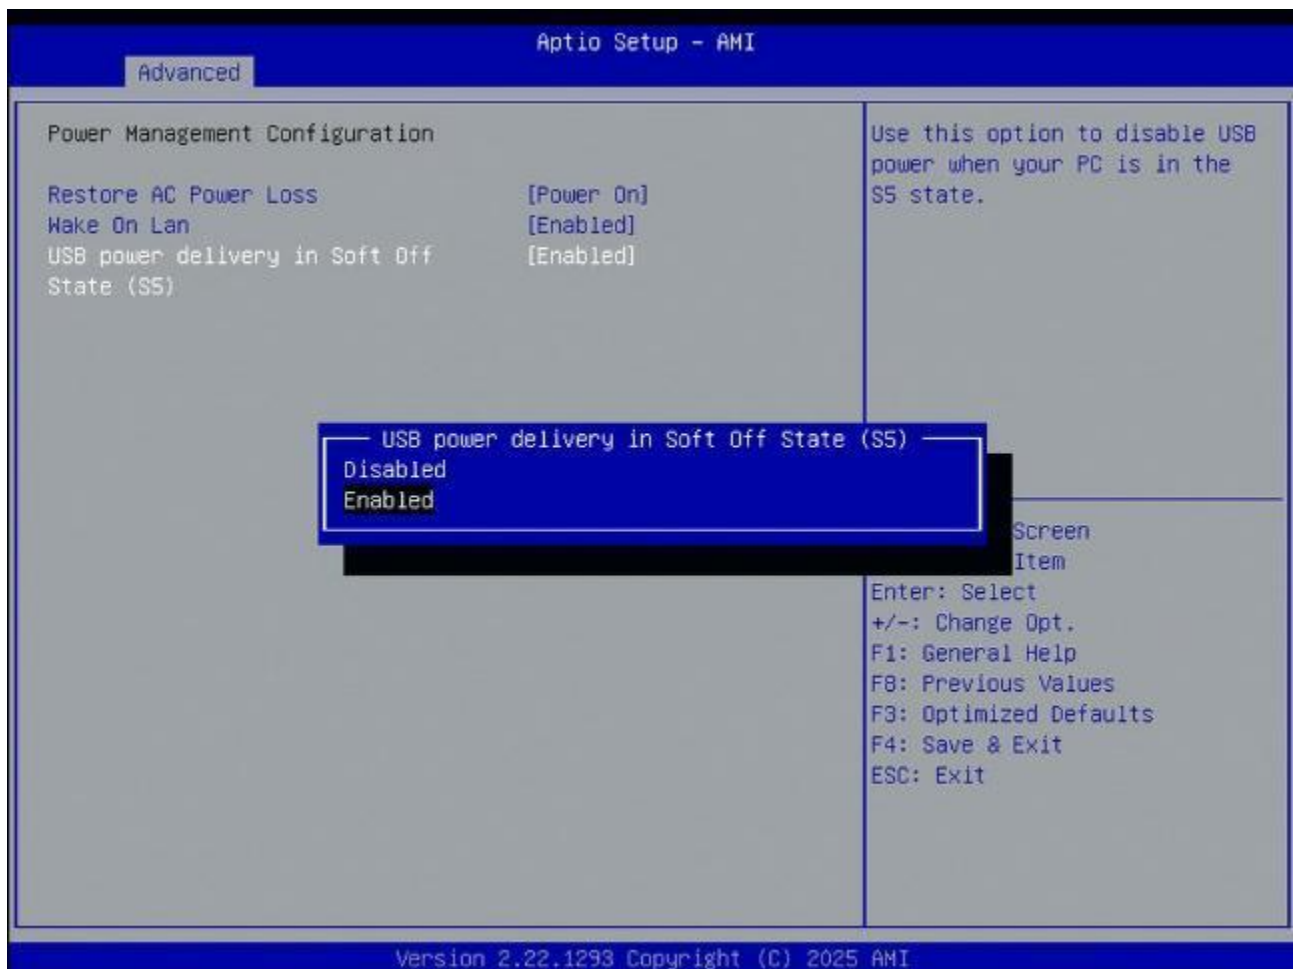

Note:

USB Power delivery in Soft off: After enabling this setting, the USB will remain powered on when the system is turned off.


3.4.9 S5 RTC Wake Settings

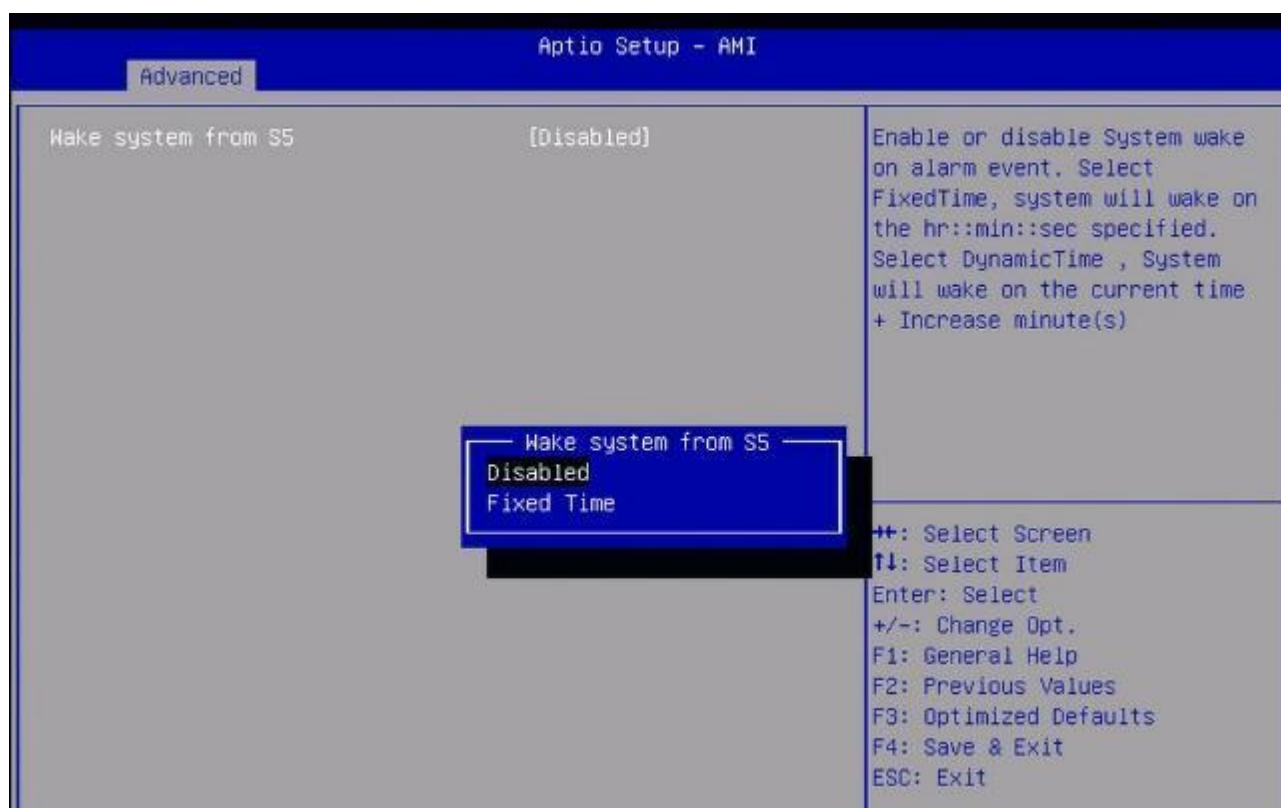


Wake system from S5:

Enable or disable System wake on alarm event. Select Fixed Time, system will wake on the hr:min:sec specified. Select Dynamic Time, System will wake on the current time + Increase minute(s)


Wake up date: Select 0 for daily system wake up 1-31 for which day of the month that you would like the system to wake up

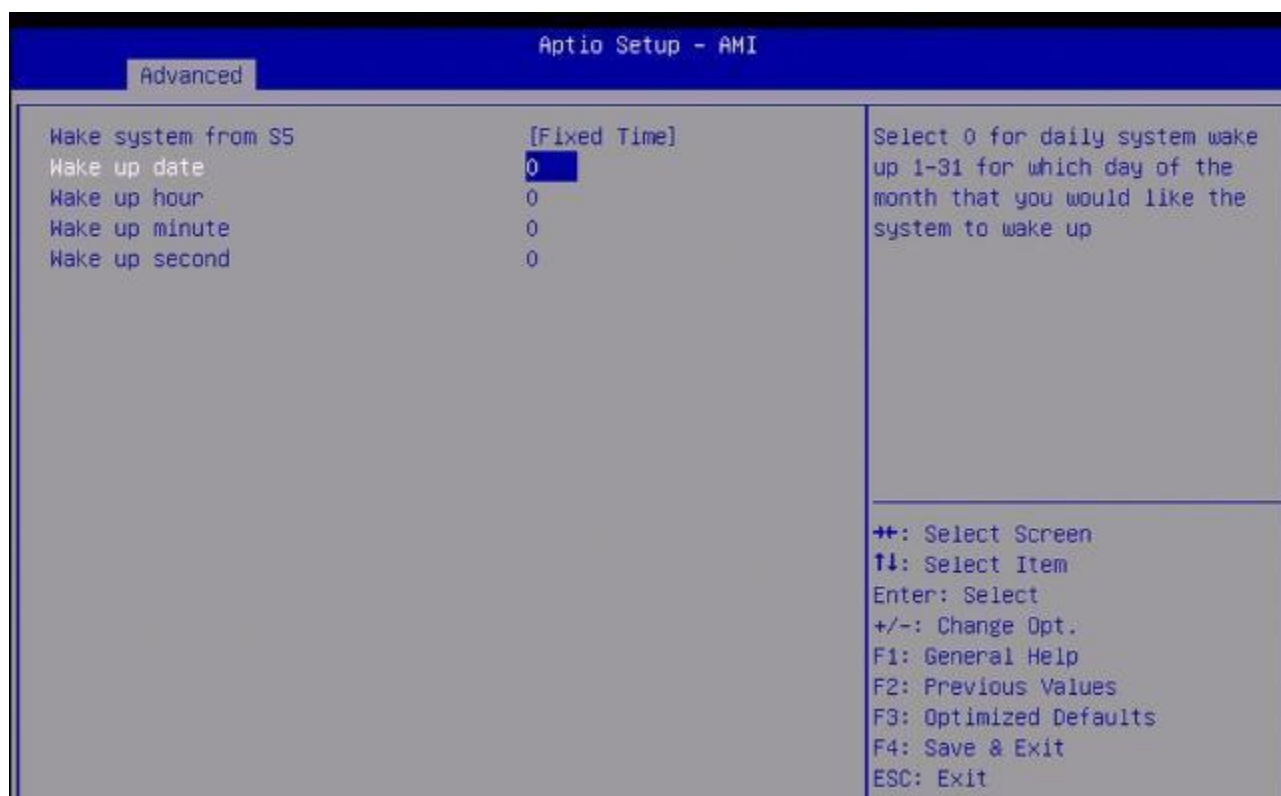


Select 0-23 For time, for example enter 3 for 3am and 15 for 3pm

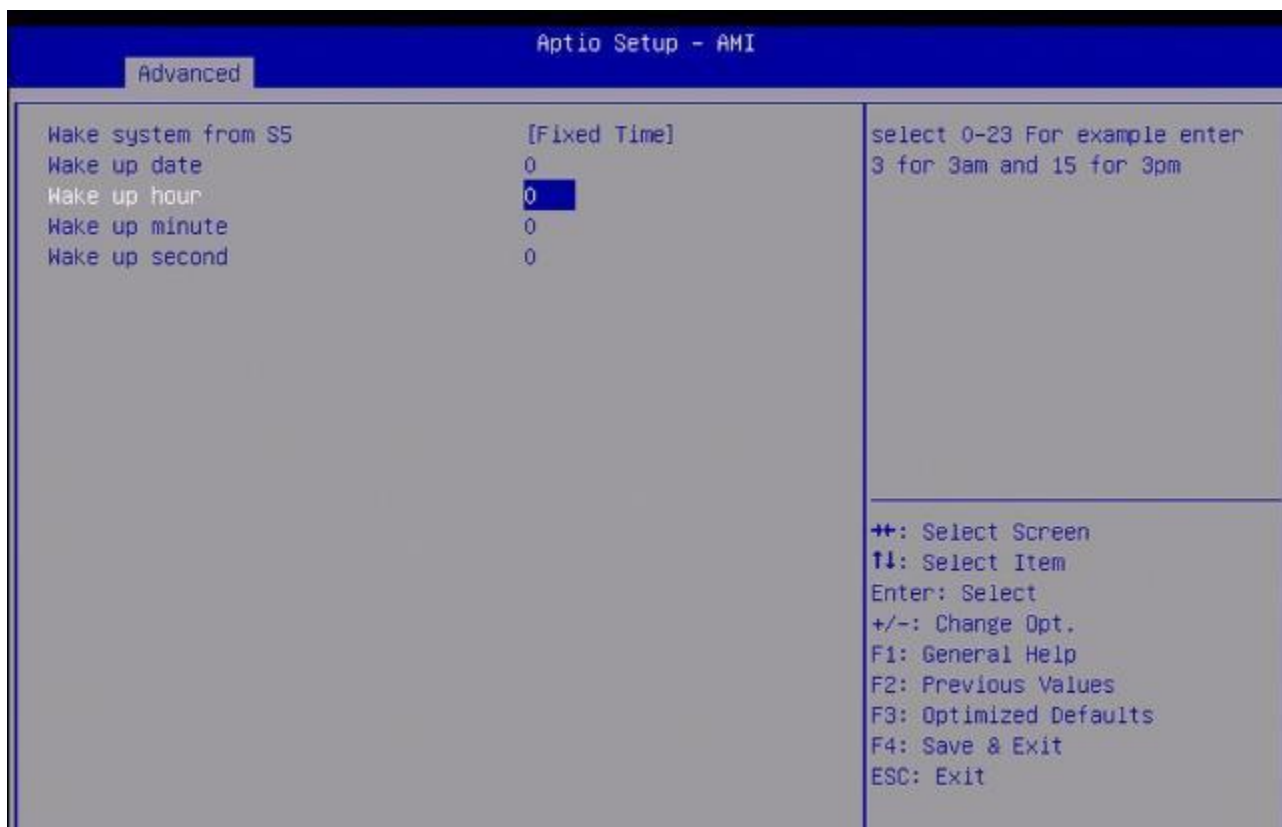


Select 0-59 for minute

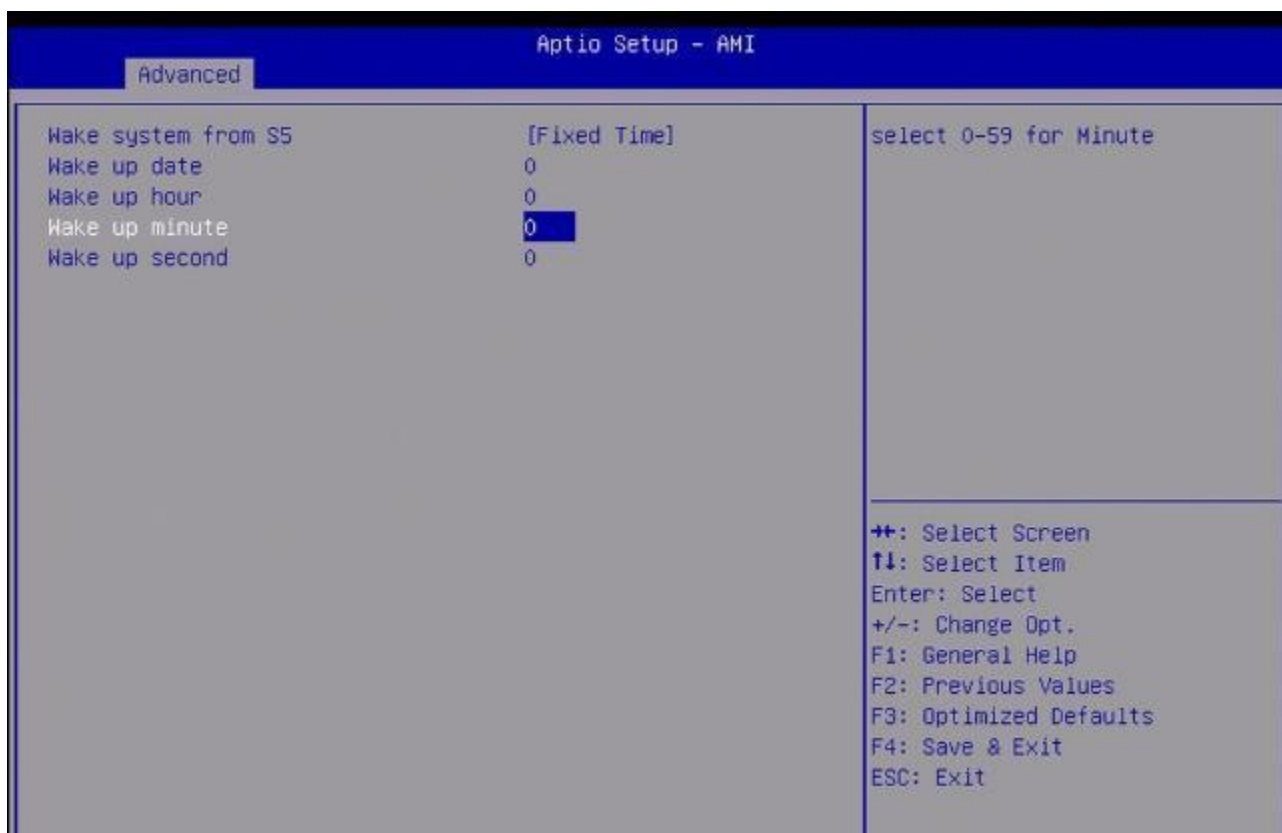

Select 0-59 for second

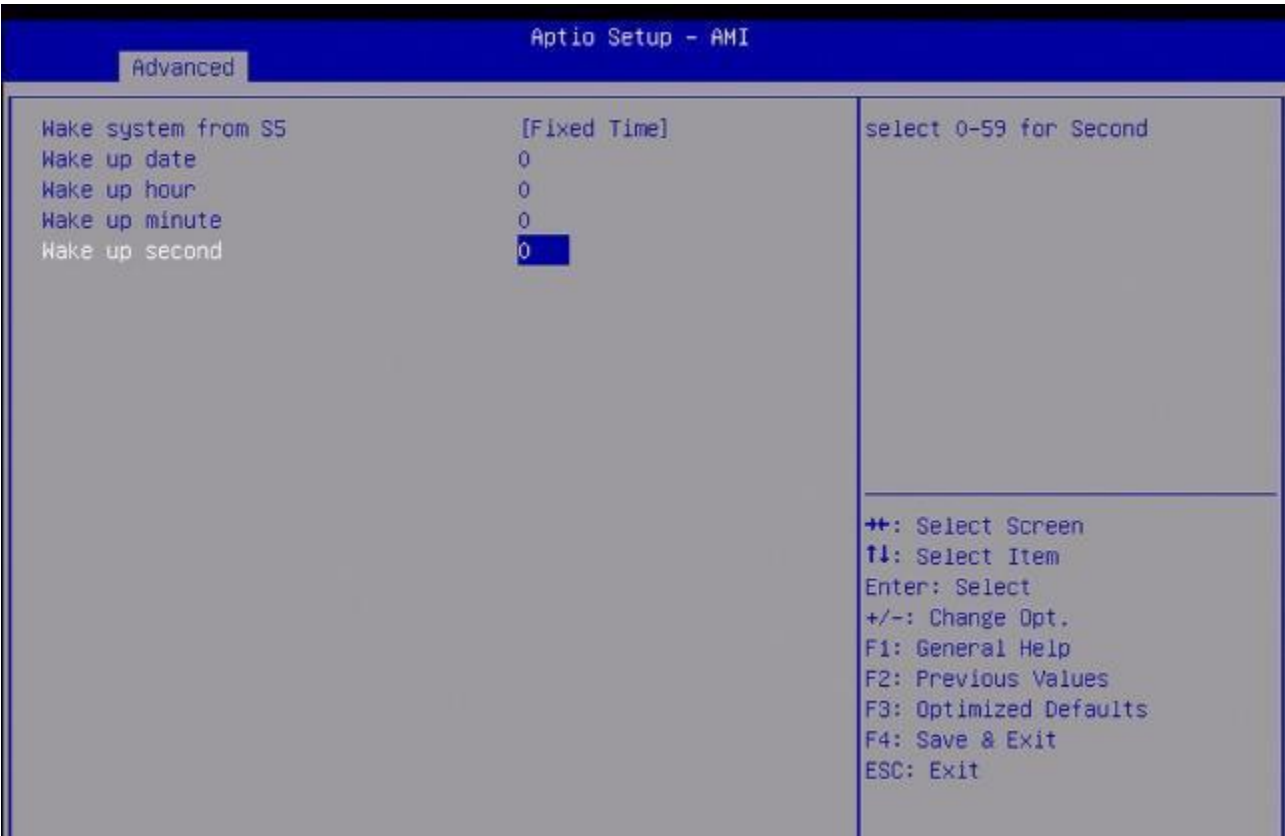


3.4.10 USB Configuration

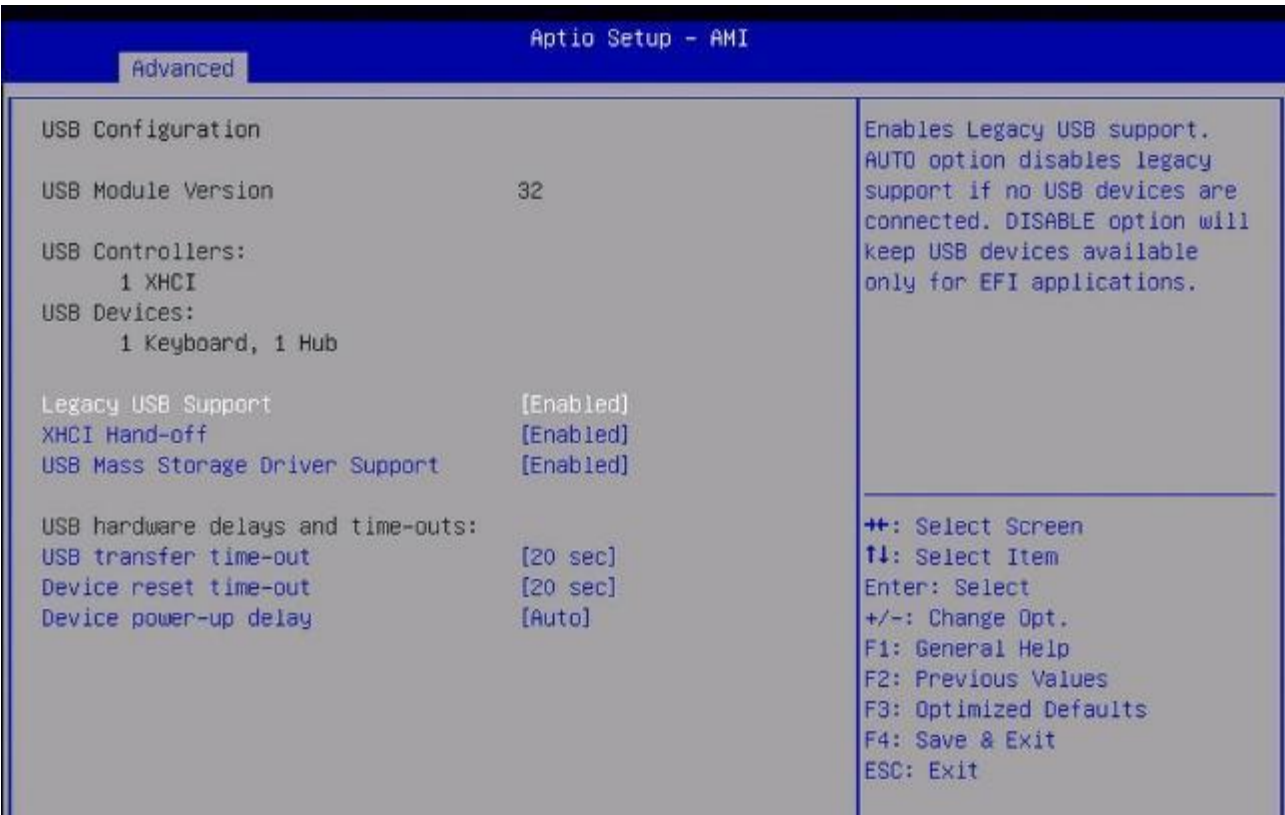

Legacy USB Support:

Enables Legacy USB support. AUTO option disables legacy support if no USB devices are connected.DISABLE option will keep USB devicesavailable only for EFI applications.


3.4.10.1 USB Transfer time-out

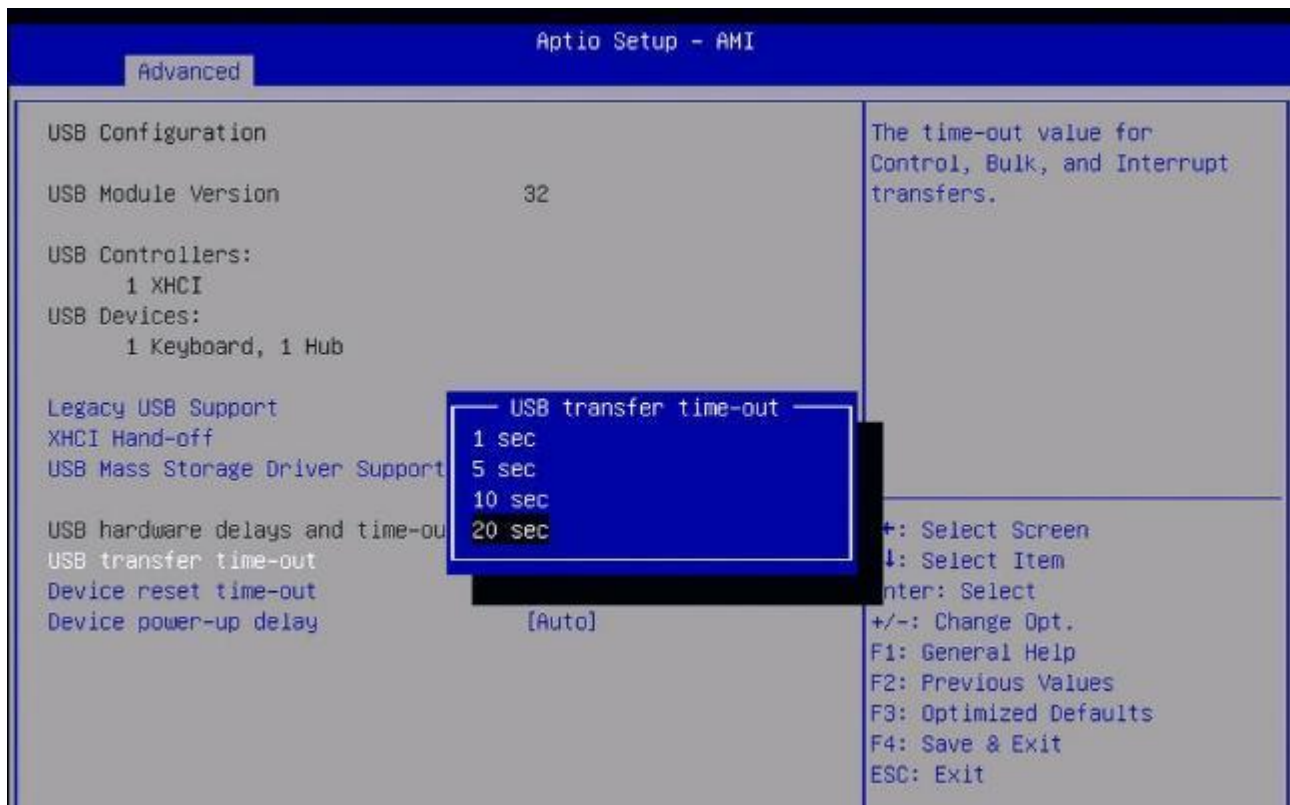

USB Transfer time-out:

The time-out value for Control, Bulk, and Interrupt transfers.


3.4.10.2 Device reset time-out

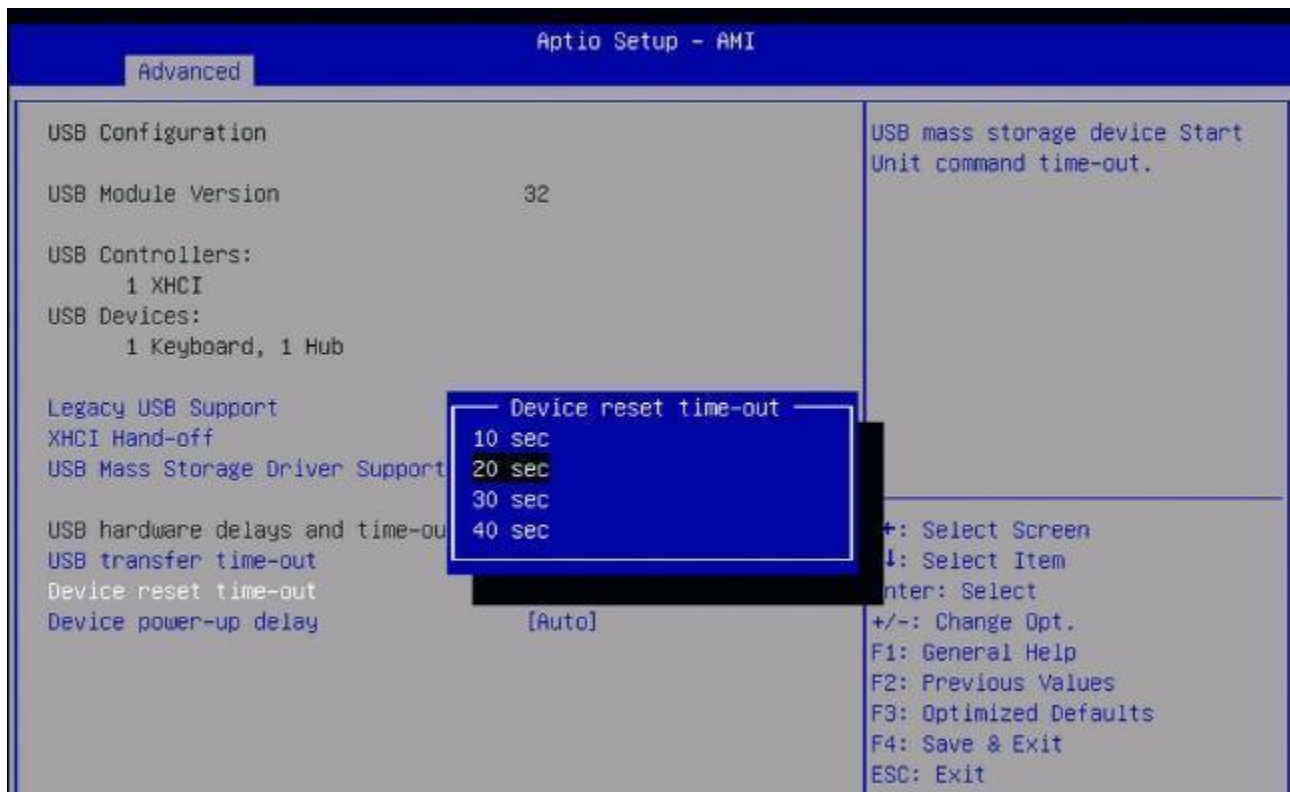

Device reset time-out:

USB mass storage device Start Unit command time-out.


3.4.10.3 Device power-up delay

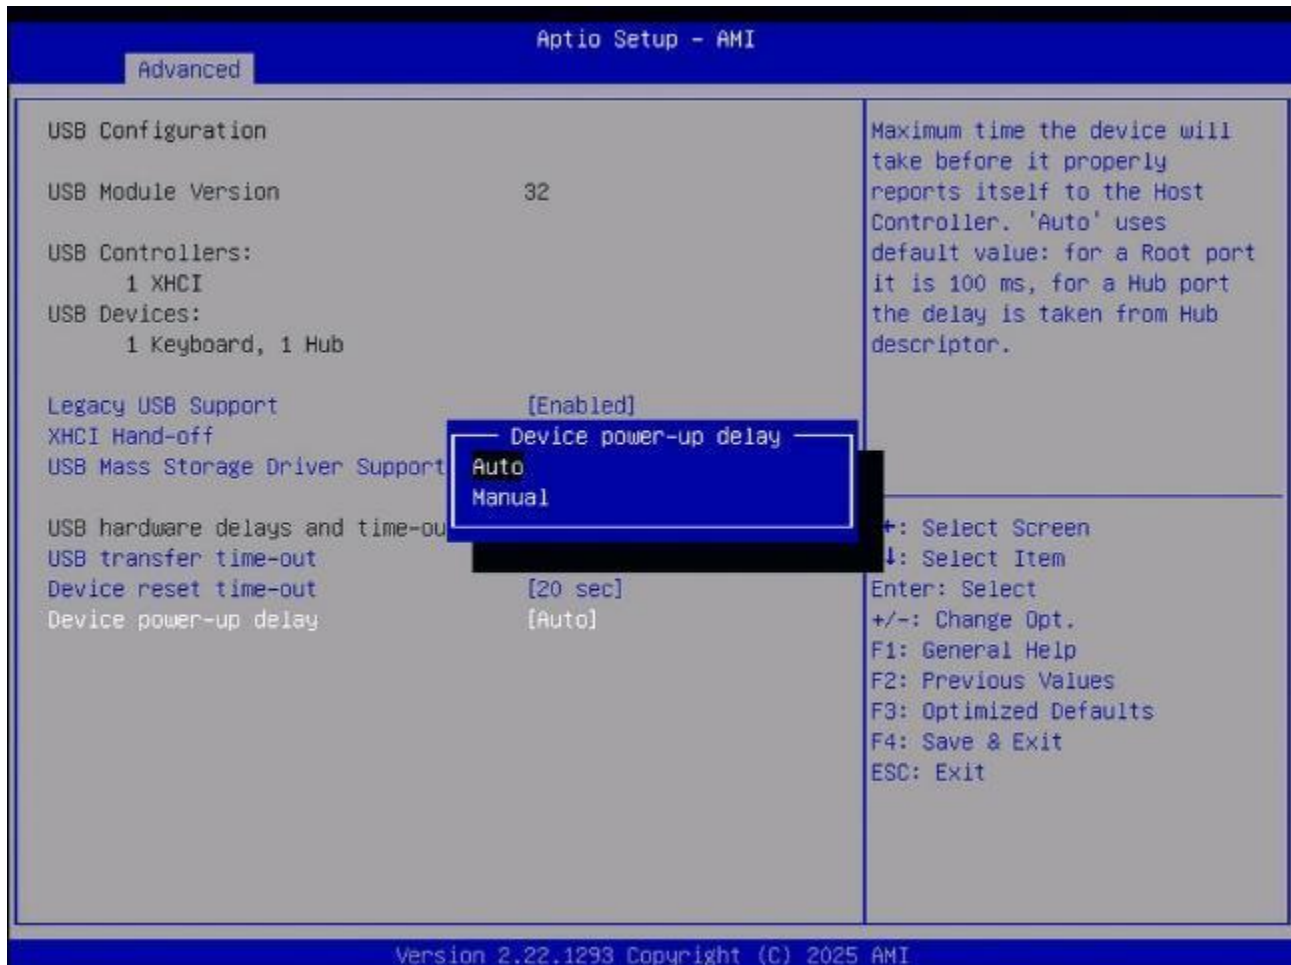

Device power-up delay:

Maximum time the device will take before it properly reports itself to the Host Controller. 'Auto' uses default value: for a Root port it is 100ms, for a Hub port the delay is taken from Hub descriptor.

3.4.11 Network Stack Configuration

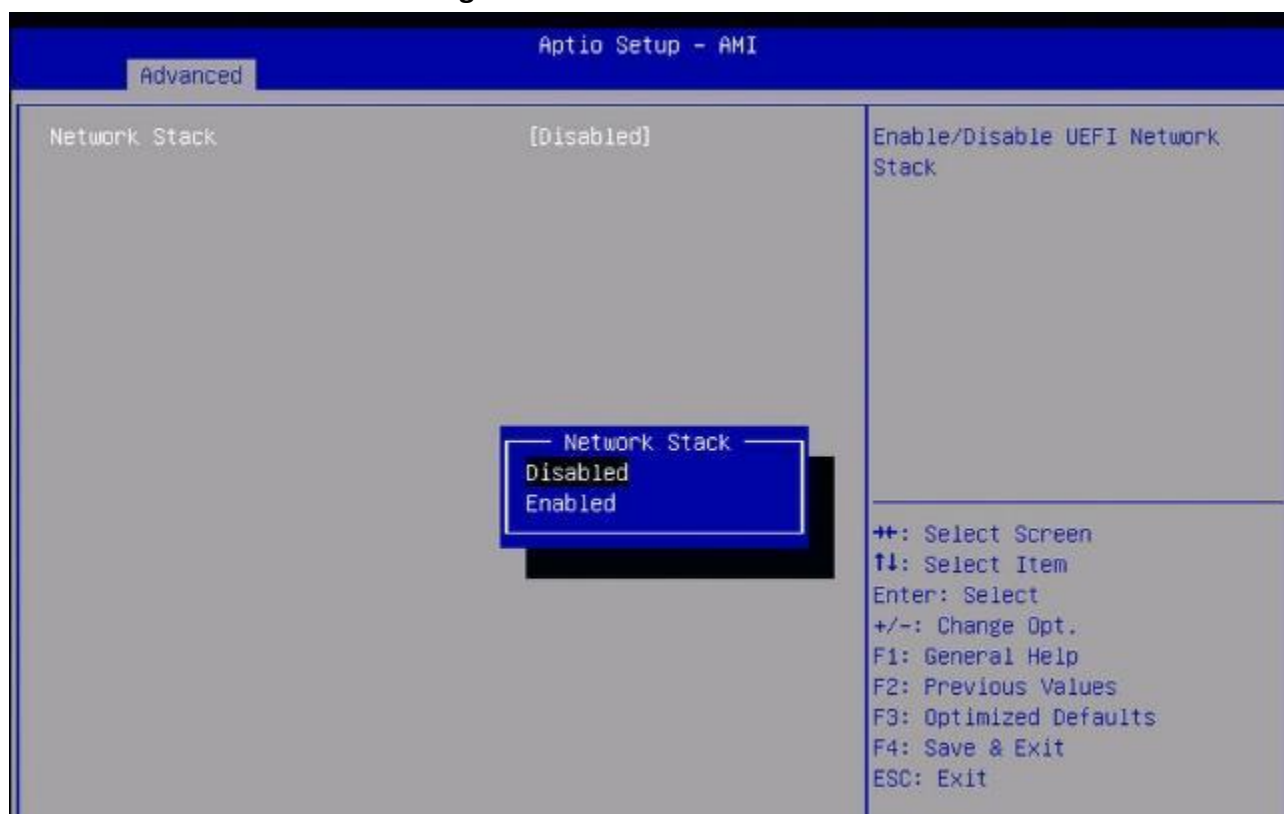

3.4.11.1 PXE boot wait time



IPv4 PXE Support:

Enable/Disable IPv4 PXE boot support. If disabled, IPv4 PXE boot support will not be available.

IPv4 HTTP Support:

Enable/Disable IPv4 HTTP boot support. If disabled, IPv4 HTTP boot support will not be available.

IPv6 PXE Support:

Enable/Disable IPv6 PXE boot support. If disabled, IPv6 PXE boot support will not be available.

IPv6 HTTP Support:


Enable/Disable IPv6 HTTP boot support. If disabled, IPv6 HTTP boot support will not be available.

PXE Boot Wait Time:


Wait time in seconds to press ESC key to abort the PXE boot. Use either +/- or numeric keys to set the value,

Media detect count:


Number of times the presence of media will be checked. Use either +/- or numeric keys to set the value.

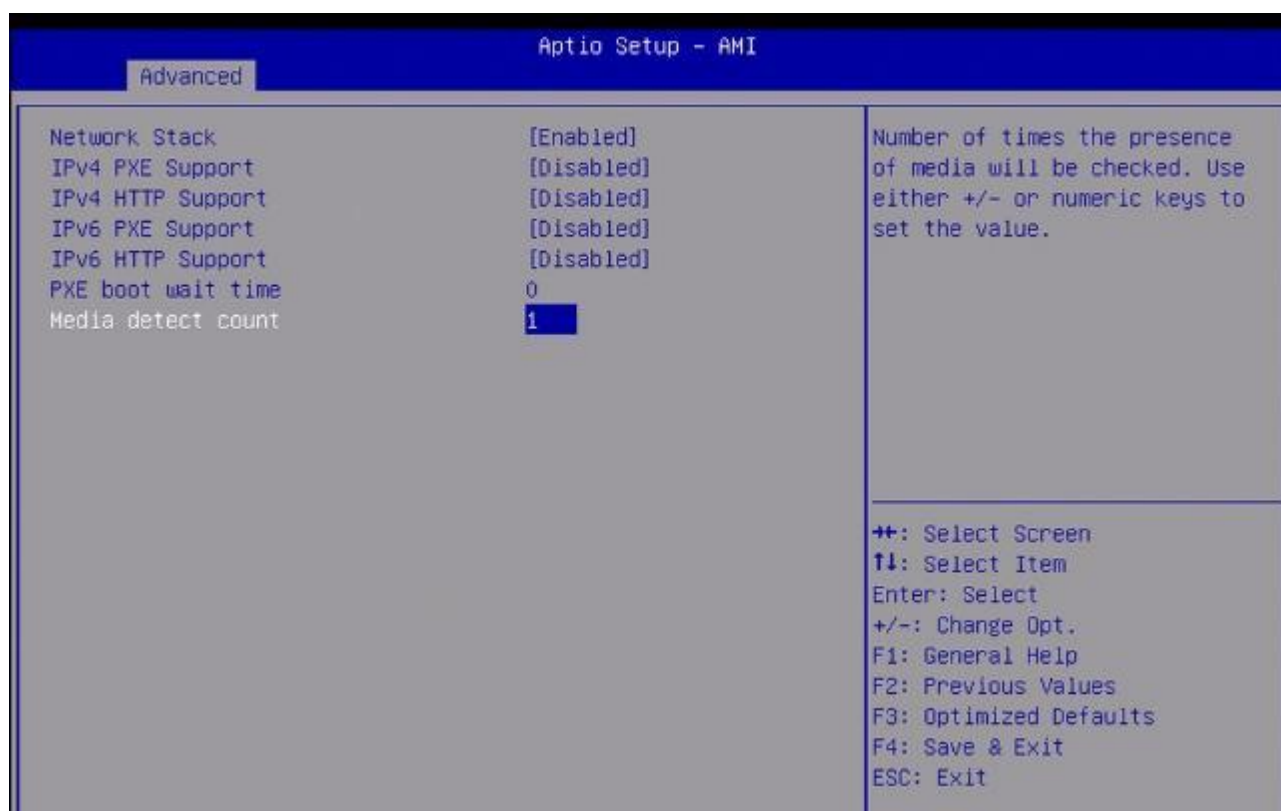3.4.11.2 Media detect count


3.4.12 NVMe Configuration

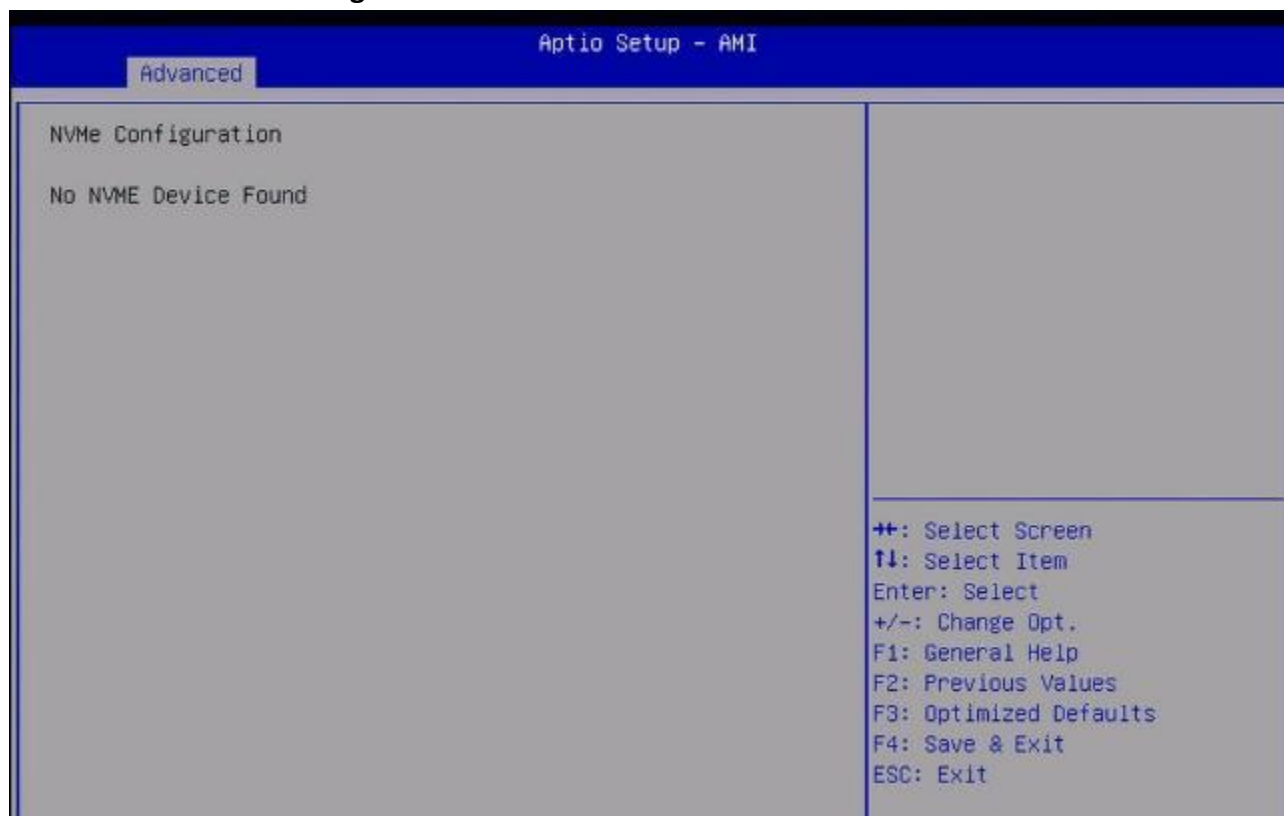


3.4.13 Intel® Ethernet Controller I226-V

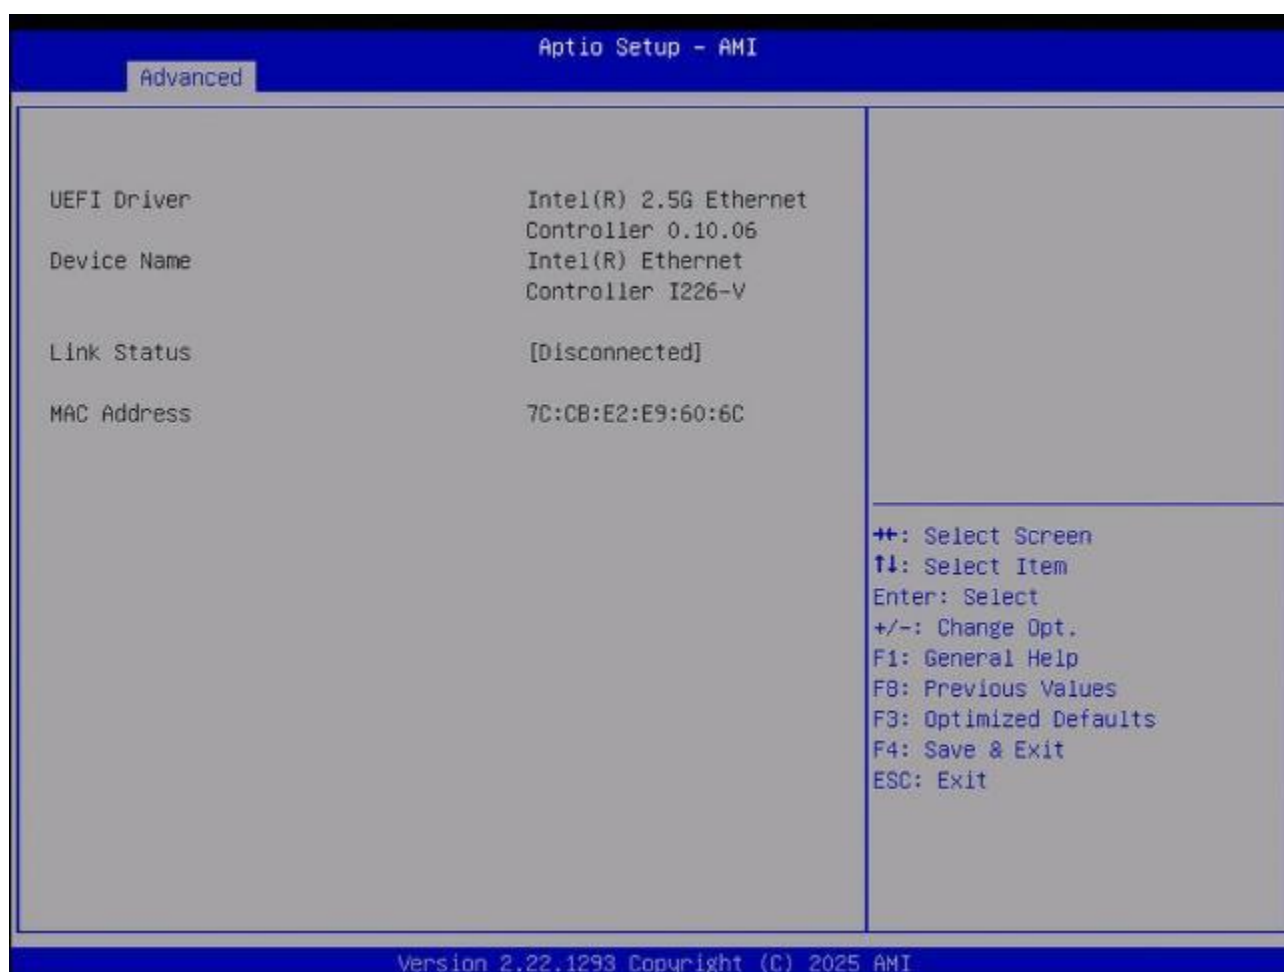

3.4.14 Intel® Ethernet Controller I226-V

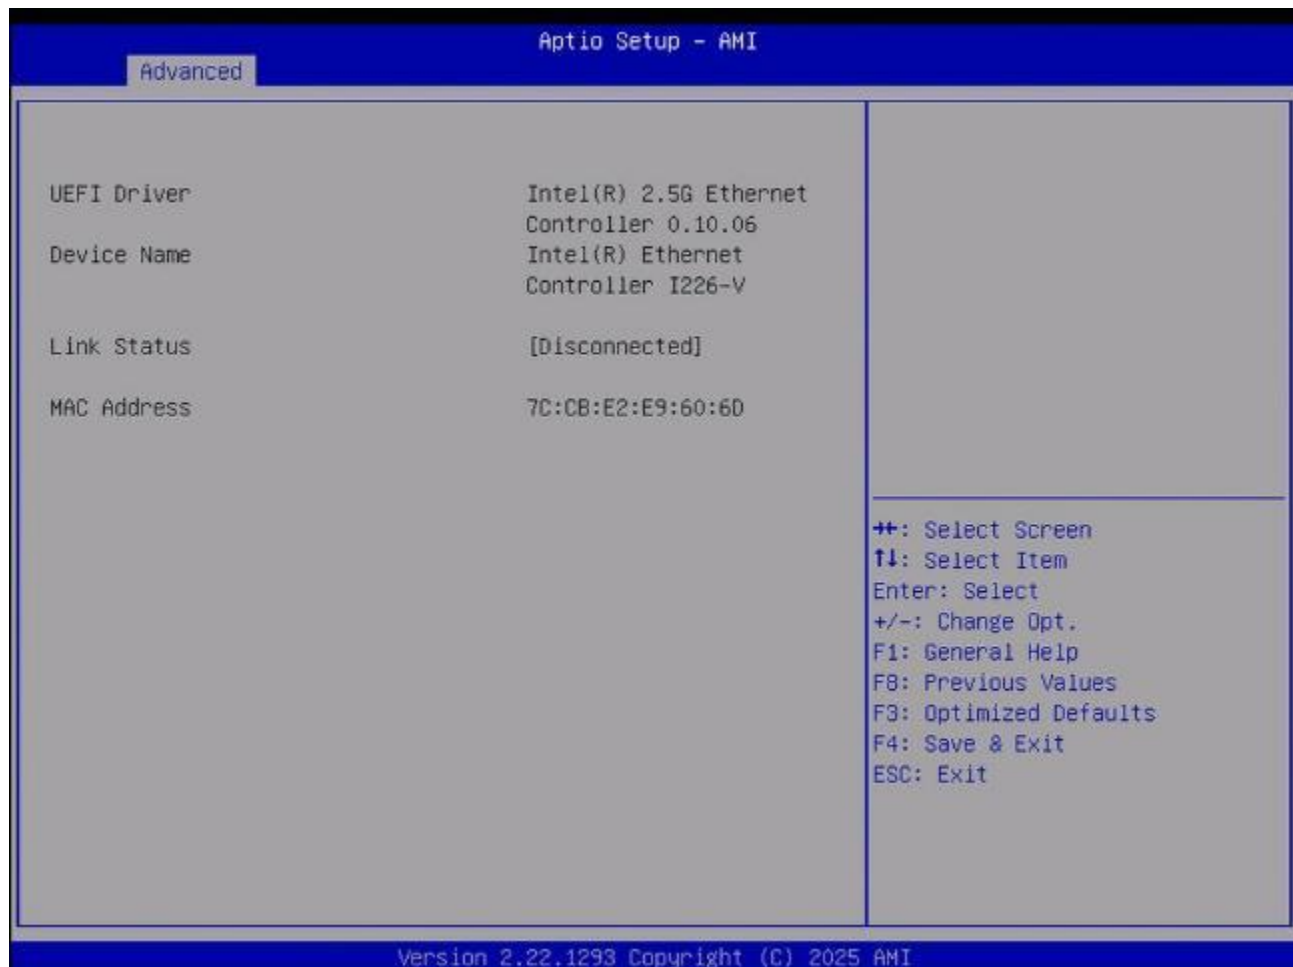

3.5 Chipset Settings

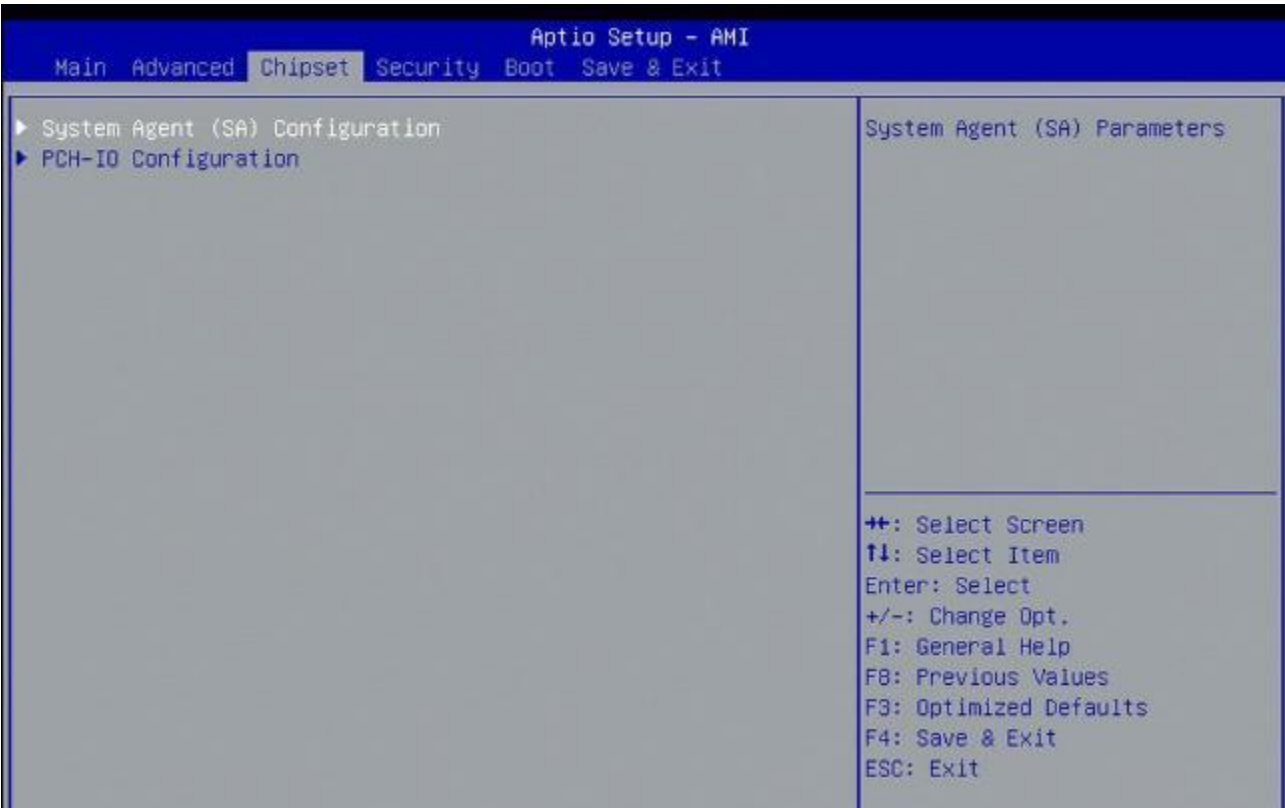

3.5.1 System Agent (SA) Configuration




3.5.1.1 Memory Configuration


Aptio Setup - AMI	
Chipset	
Memory Configuration	
Memory RC Version	0.0.4.74
Memory Frequency	4800 MHz
tCL-tRCD-tRP-tRAS	40-39-39-77
MC 0 Ch 0 DIMM 0	Populated & Enabled
Size	16384 MB (DDR5)
Number of Ranks	1
Manufacturer	UnKnown
MC 0 Ch 0 DIMM 1	Not Populated / Disabled
MC 1 Ch 0 DIMM 0	Not Populated / Disabled
MC 1 Ch 0 DIMM 1	Not Populated / Disabled

++: Select Screen
↑↓: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save & Exit
ESC: Exit

3.5.2 PCH-IO Configuration

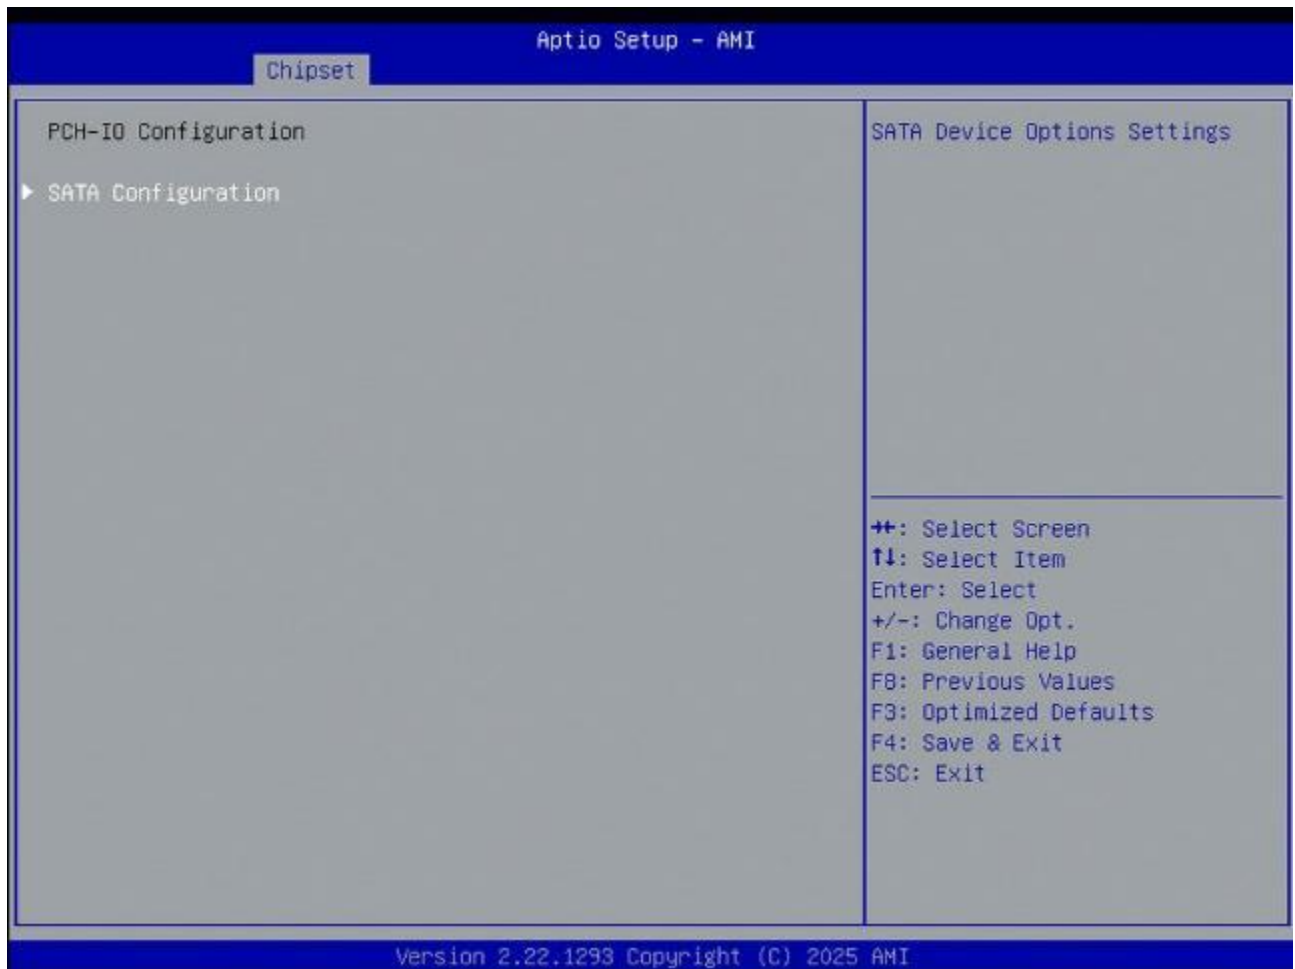


3.5.2.1 SATA Configuration

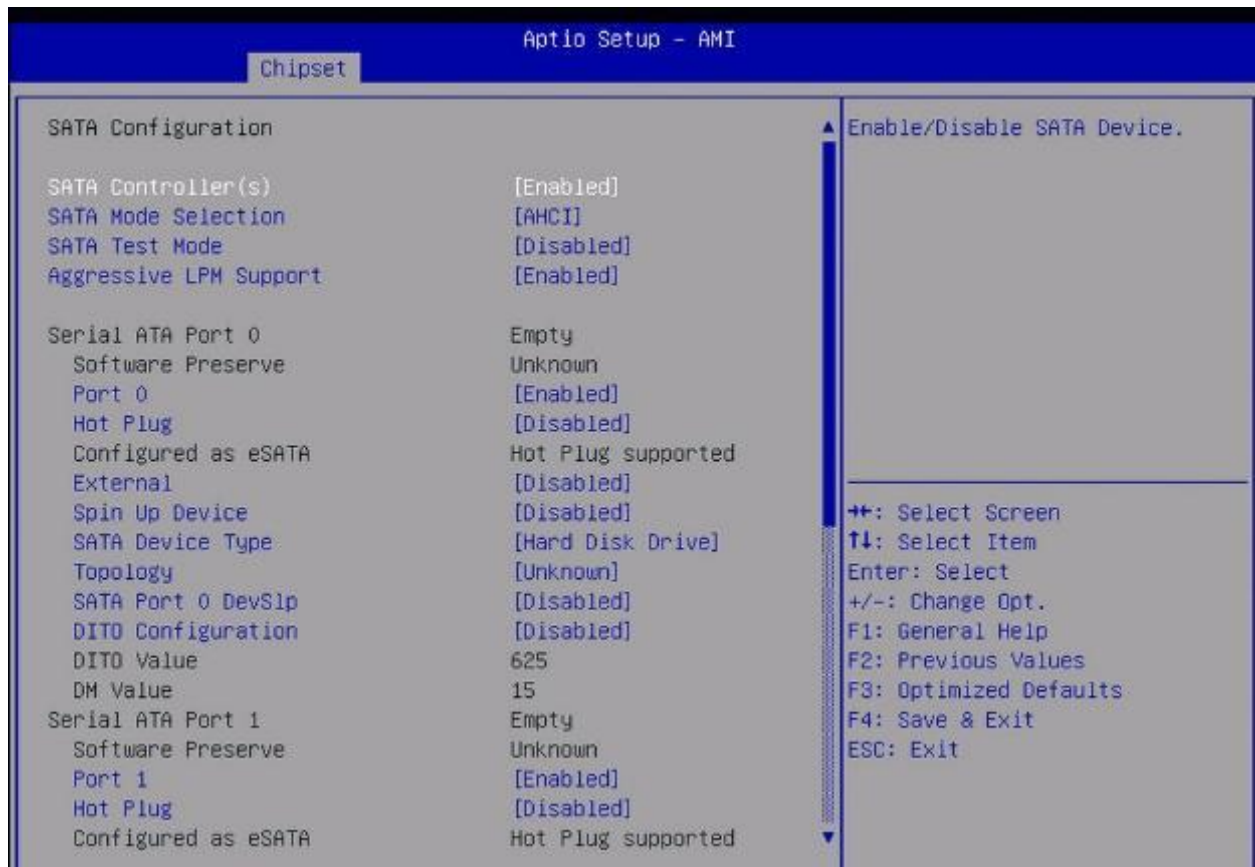


SATA Device Type:


Identify the SATA port is connected to Solid State Drive or Hard Disk Drive

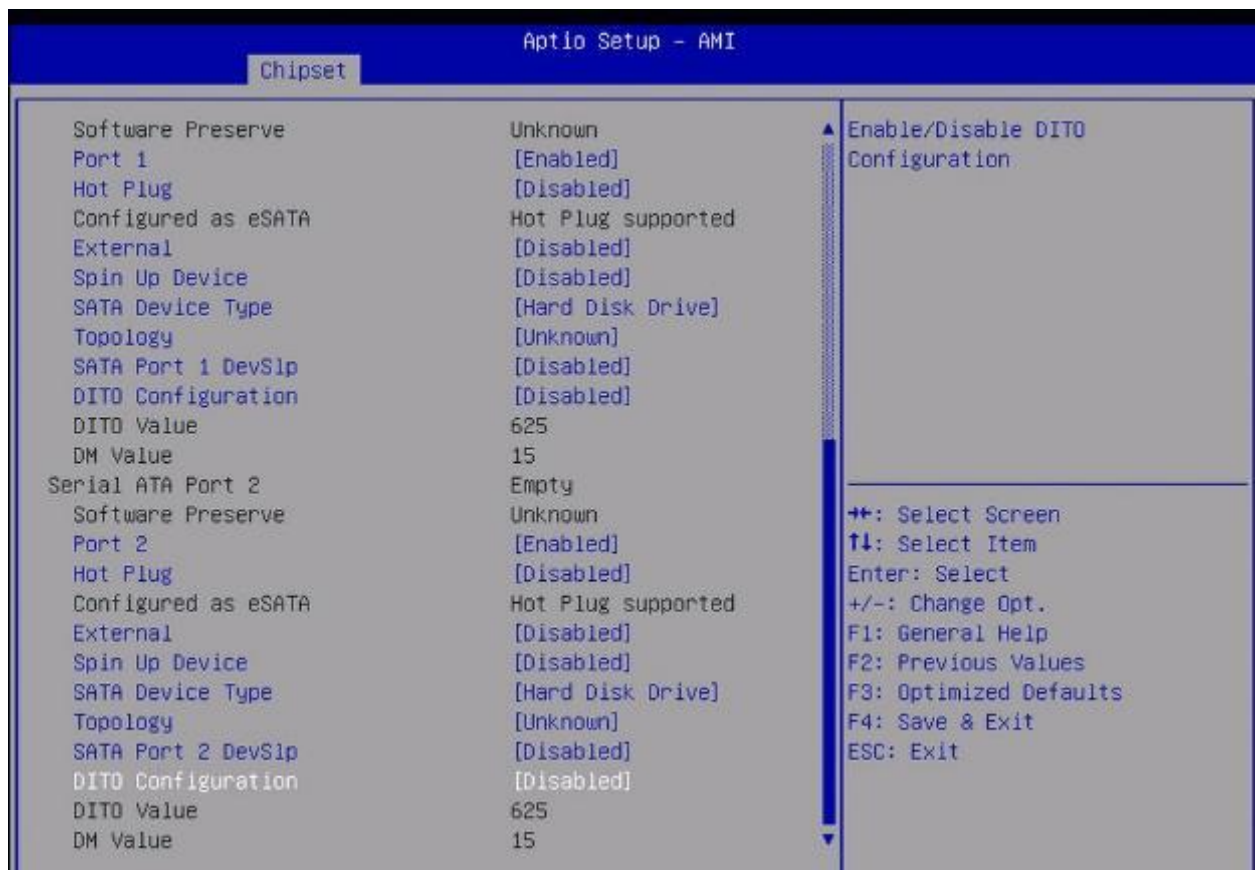


3.6 Security Settings

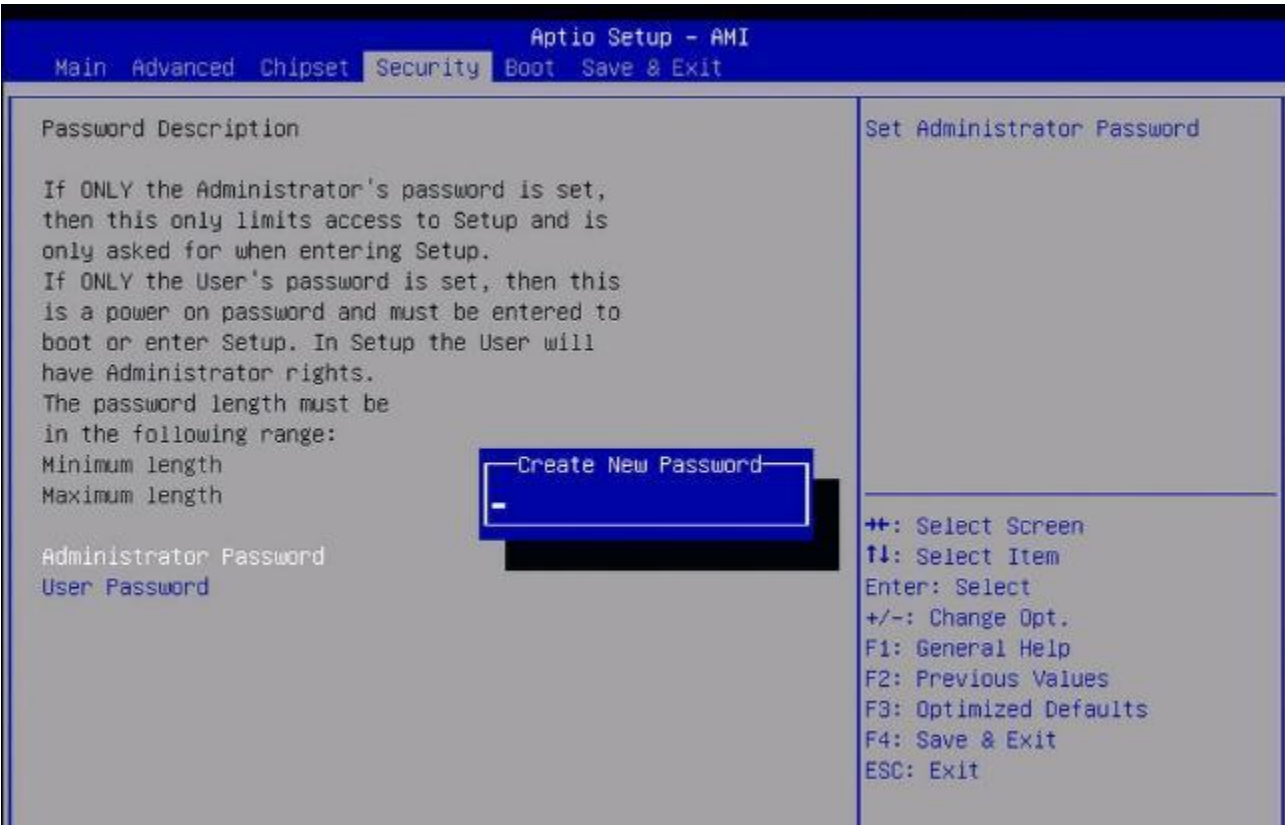


3.6.1 Administrator Password

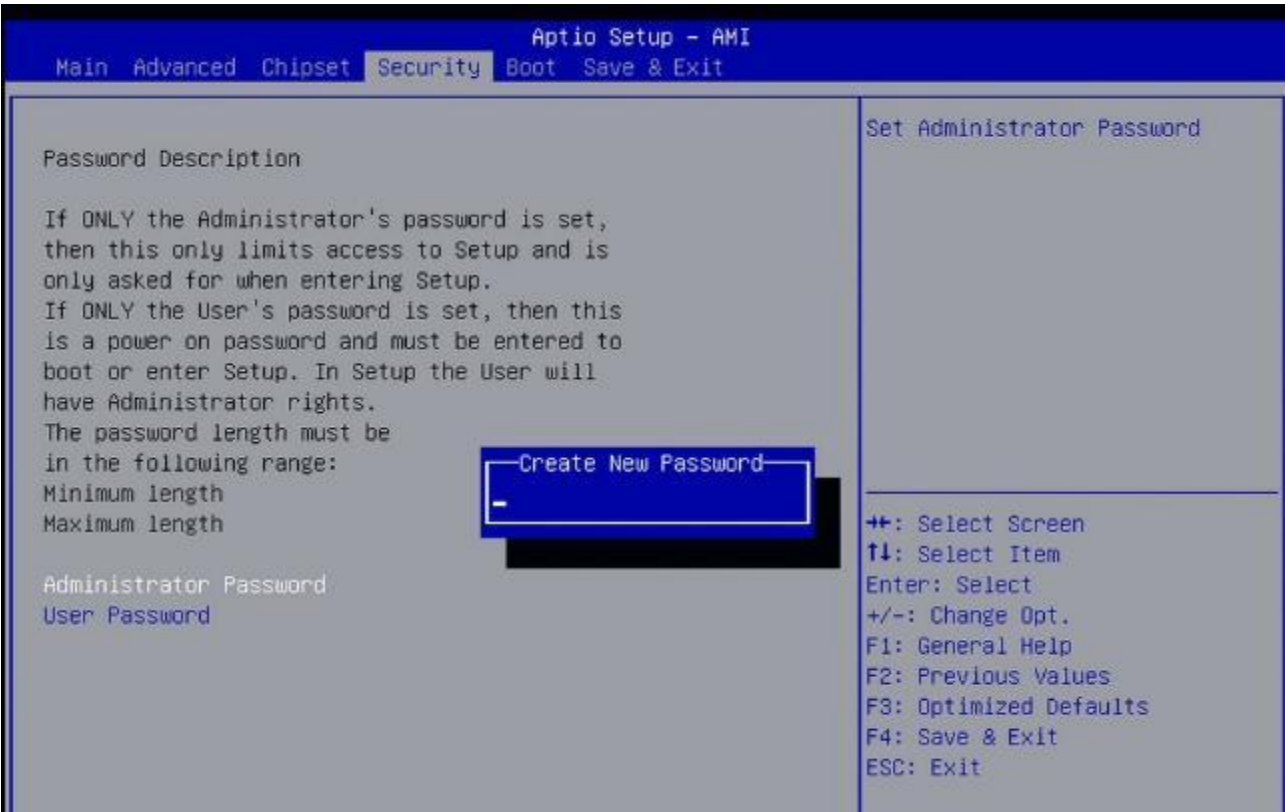

3.6.2 User Password

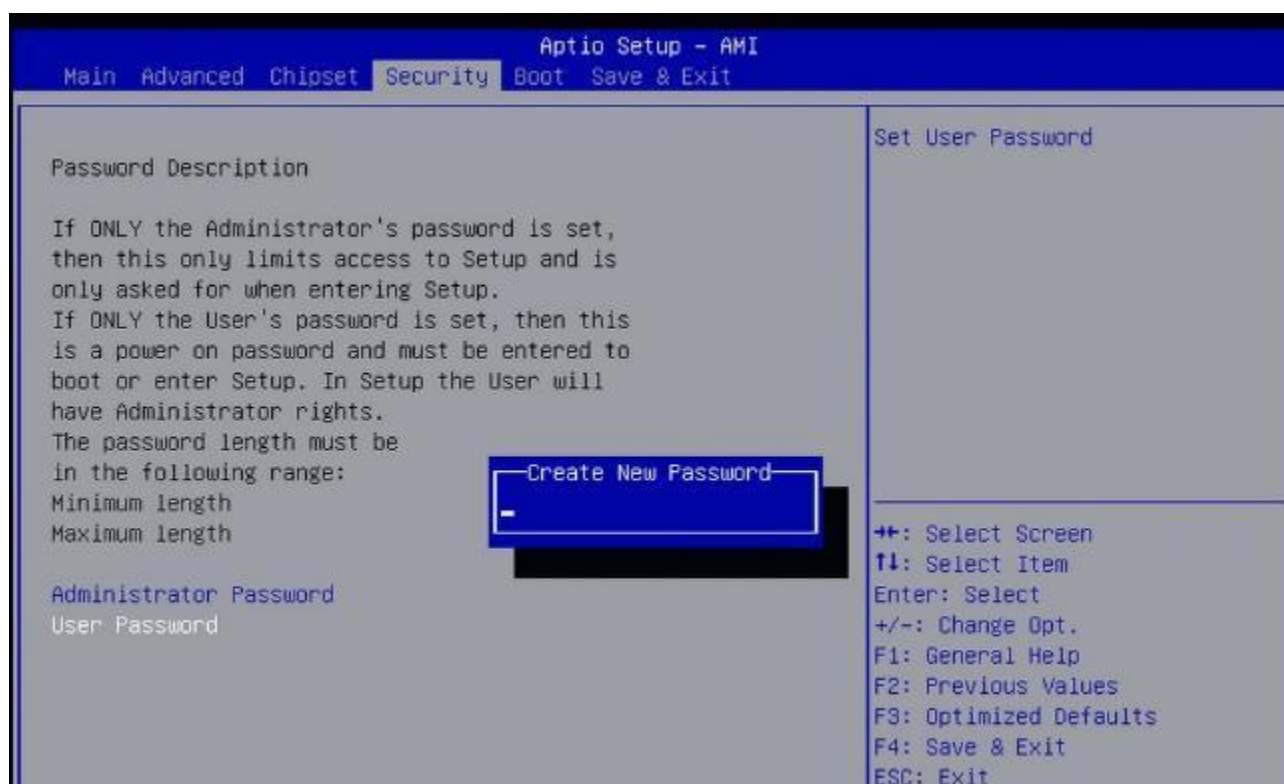

3.7 Boot Settings

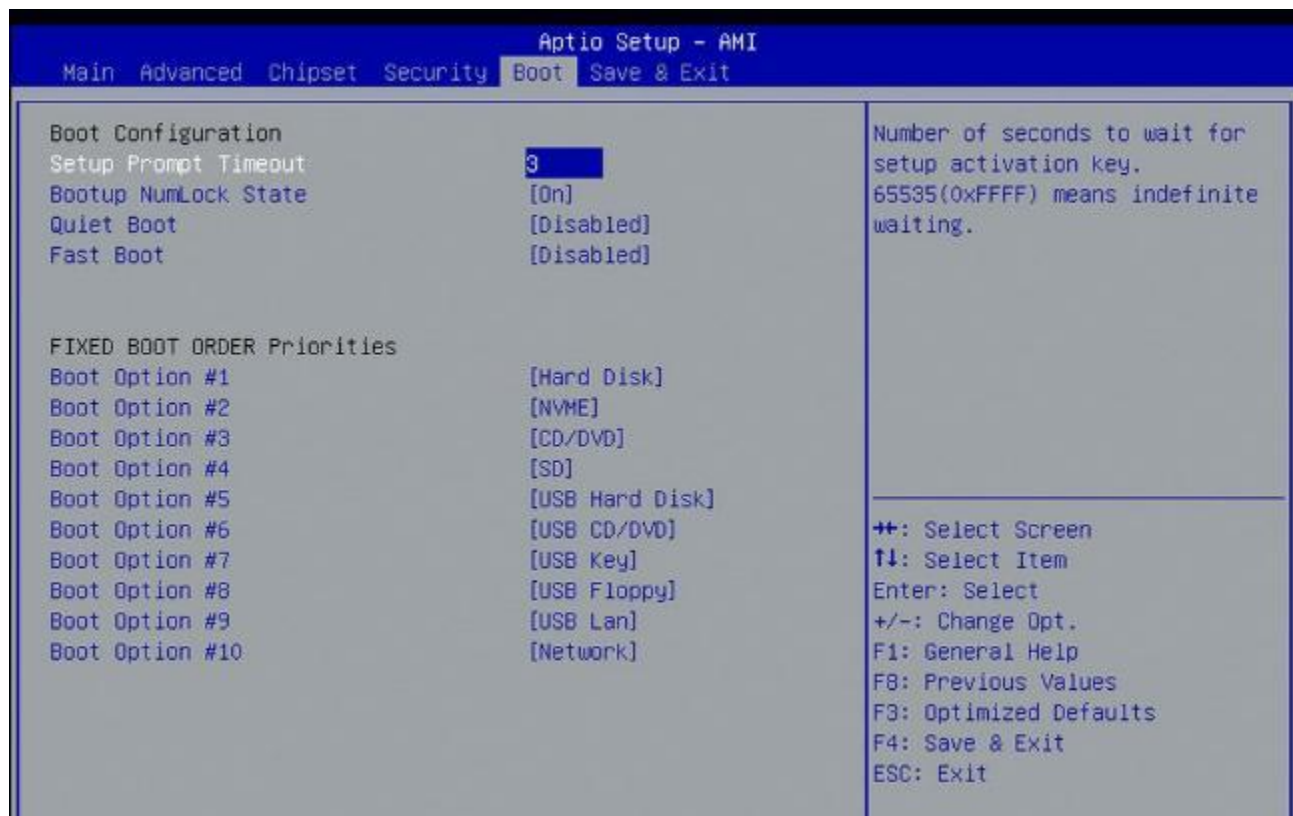


Setup Prompt Timeout:

Number of seconds to wait for setup activation key. 65535(0xFFFF) means indefinite waiting.

Fast Boot:

Enables or disables boot with initialization of a minimal set of devices required to launch active boot option. Has no effect for BBS boot options.

3.8 Save & Exit Settings

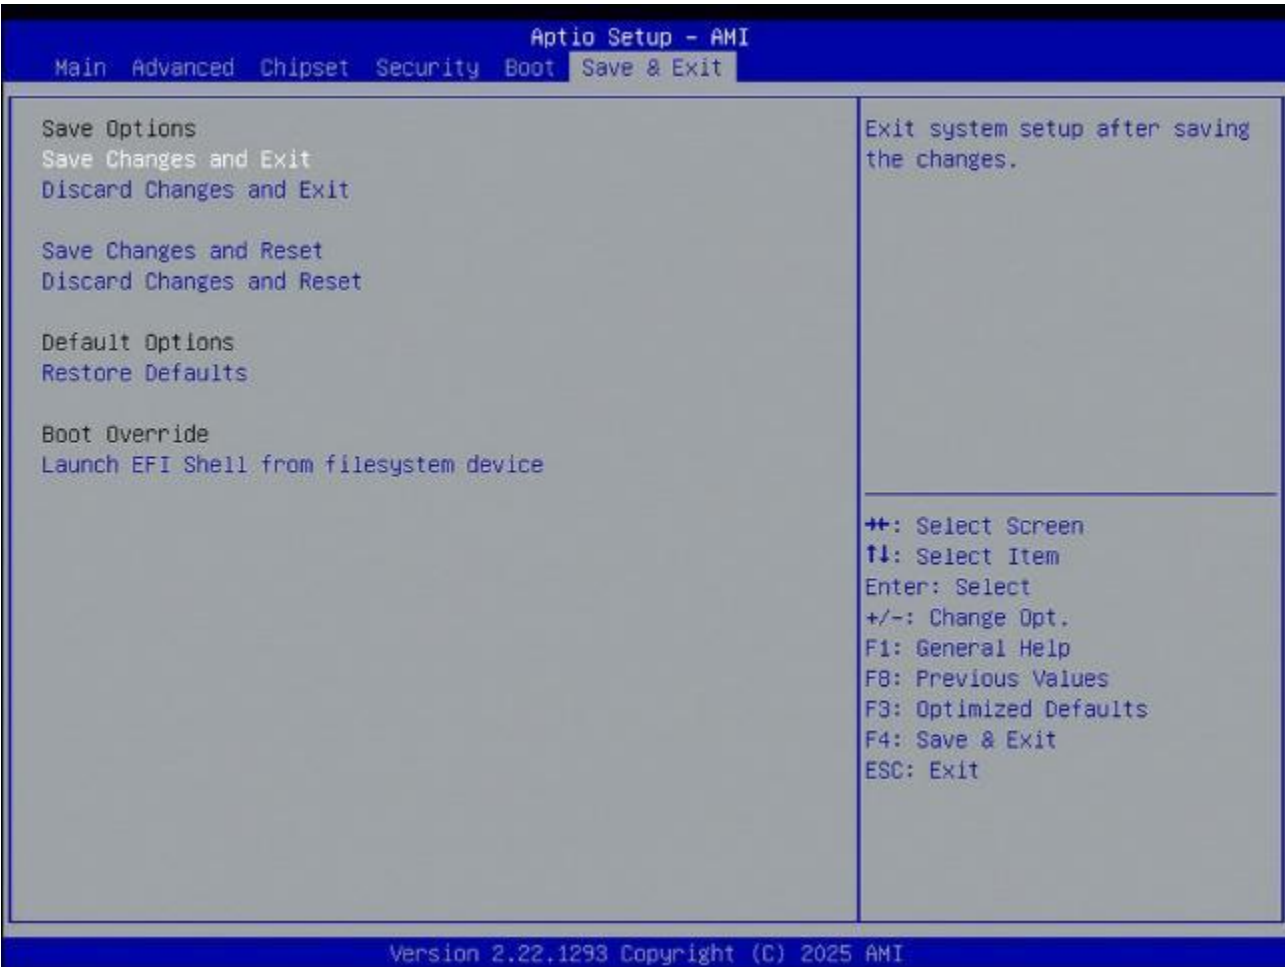

Restore Defaults:

Restore/Load Default values for all the setup options.