

ELPL-G101

PCIe to single isolated GbE LAN module

HIGHLIGHT FEATURES

- Intel i210 controller
- Complies with IEC 60950-1 : 2005 + A1 : 2009 + A2 : 2013 2kV HiPOT protection
- Complies with EN61000-4-2 (ESD) Air-15kV, Contact-8kV
- Optional industrial temperature (-40°C to 85°C) support

SPECIFICATIONS




Model Name	ELPL-G101
Module Type	PCIe to Single GbE LAN Module
Form Factor	Low-Profile PCIe
Function	LAN
Input I/F	PCI Express 2.1 x1
Output I/F	GbE LAN
Output Port	1
Output Connector	RJ45
Max. Power Consumption	2.8W (3.3V, 845mA)
Dimension (W x L x H/mm)	65.3 x 68.6 x 2.6
Temperature	Operation : S/T 0°C ~ 70°C ; W/T -40°C ~ 85°C (Ta) Storage : -55°C ~ 95°C (Ta)
Vibration	5G@[7~2000Hz]
Shock	50G@0.5ms
OS Support	Windows : XP (32bit), 7 (32 / 64bit), 8 / 8.1 (32 / 64 bit), 10 (32 / 64bit), and above version Linux : Kernel 2.4 series, 2.6.x, 3.x, and above version
Warranty	3 Years
Notes	Please download driver from Intel official website.

ORDER INFO.




P/N	Description
ELPL-G101-C1	PCIe to Single GbE LAN Module, Low-Profile bracket/ Standard Temperature
ELPL-G101-C2	PCIe to Single GbE LAN Module, Stander bracket/ Standard Temperature
ELPL-G101-W1	PCIe to Single GbE LAN Module, Low-Profile bracket/ Wide Temperature
ELPL-G101-W2	PCIe to Single GbE LAN Module, Stander bracket/ Wide Temperature

MECHANICAL DRAWING

ELPL-G101-C1/W1

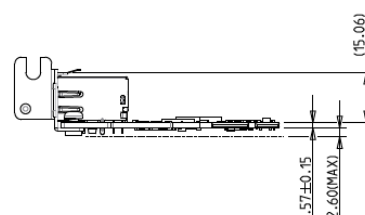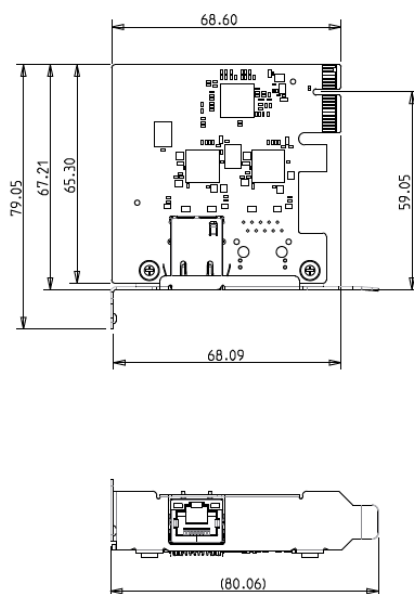

ELPL-G101-C2/W2

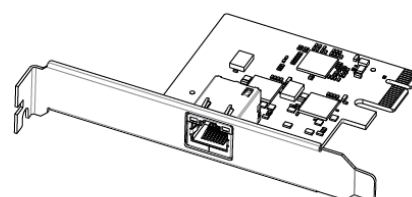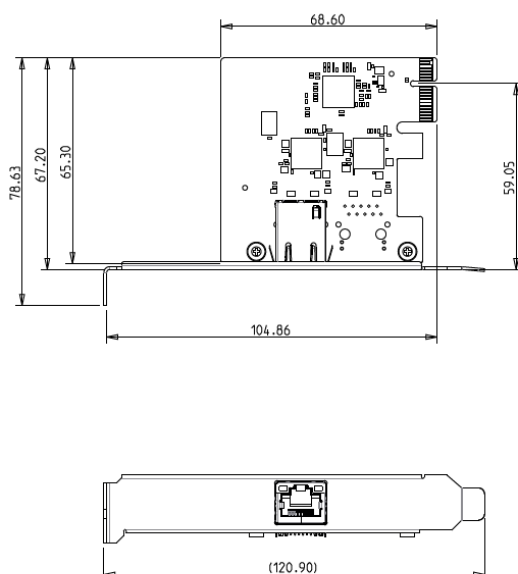

HQ (Taiwan) T +886-2-7703-3000 / E sales@innodisk.com

CN T +86-755-2167-3689 / E sales_cn@innodisk.com

US T +1-510-770-9421 / E usasales@innodisk.com

EU T +31-40-3045-400 / E eusales@innodisk.com

JP T +81-3-6667-0161 / E jp_sales@innodisk.com

innodisk