



USB2400

2-port USB2.0
PCI Express Add-On Card



Introduction

SUNIX USB2400 is a dual-port High-Speed USB2.0 PCI Express card and the interface has a potential transfer rates of 2.5Gbps using a single-lane (or x1) PCI Express link. With native PCI Express EHCI/OHCI USB2.0 host controller, this board is driver free under Windows, MAC and Linux operation system and best compatible with existing USB peripheral to your desktop computer. Each USB port supplies maximum +5VDC / 1000mA power output to USB device with over current protection.

The USB2.0 High-Speed implementation of the Universal Serial Bus standard supports transfer speeds up to 480 Mbps. With USB USB2.0 High-Speed ports, its make you connect kinds of USB devices and peripheral to your desktop computer instantly and conveniently, such as hubs, data storage devices, PC video cameras, digital cameras, CD-R/RWs, DVD-ROMs, scanners, printers, memory card readers, and more.

Features

- Compliance with PCI Express Base Specification Reversion 1.1.
- Compliant with the Universal Serial Bus (USB) Specification Revision 2.0
- High performance native USB2.0 PCI Express EHCI/OHCI host controller on board.
- Expands two external USB2.0 High-Speed Type-A ports on the system.
- Each USB port supports +5VDC power output up to maximum 1000mA.
- Each USB port built-in over current protection fuse for safety USB connection.
- Plug-n-Play, I/O address and IRQ assigned by operating system.
- Support USB device Hot-Swapping and Plug-n-Play function.
- Drivers free under Linux, Apple MAC, Microsoft operation systems.
- Certified by Electromagnetic Compatibility (CE, FCC, VCCI, C-Tick, BSMI) and RoHS approval.

Specifications

Hardware

BUS	PCI Express Spec 1.1, Single-Lane (x1)
Controller	PCI Express USB2.0 Host controller
USB Standard	Enhanced Host Controller Interface (EHCI) and Open Host Controller Interface (OHCI)
IRQ & IO	Assigned by System

USB Communication

Interface	Universal Serial Bus 2.0 / 1.1
Speed	High-Speed (HS), Full-Speed(FS) and Low-Speed(LS) Data Transfer rate of 1.5, 12, and 480Mbps
No. of Port	2-port
PCB Receptacle	USB2.0 Type-A Female
Protection	±15KV IEC61000-4-2 Air Gap Discharge ±8KV IEC61000-4-2 Contact Discharge

Power

Source	PCI Express Bus Power
Output Capacity	+5VDC / Maximum 1.0A / each port Note: Total power output capacity will be limited by PC system power supply.
Over Current Protection	Standard USB2.0 Port: +5VDC / 1.1A@5V PTC fuse / each port
Power Consumption	1.1W @ 3.3V (board only without power output to device)

Driver Support

Microsoft Client	XP / Vista / 7 / 8.x / 10 (X86/X64)
Microsoft Server	2000 / 2003 / 2008 / 2008R2 / 2012 (X86/X64)
Microsoft Embedded	XP Embedded / POS Ready 2009 / Embedded System
Linux	Linux 2.4.x / 2.6.x / 3.x
Apple MAC	MAC OS X 10.4 or later

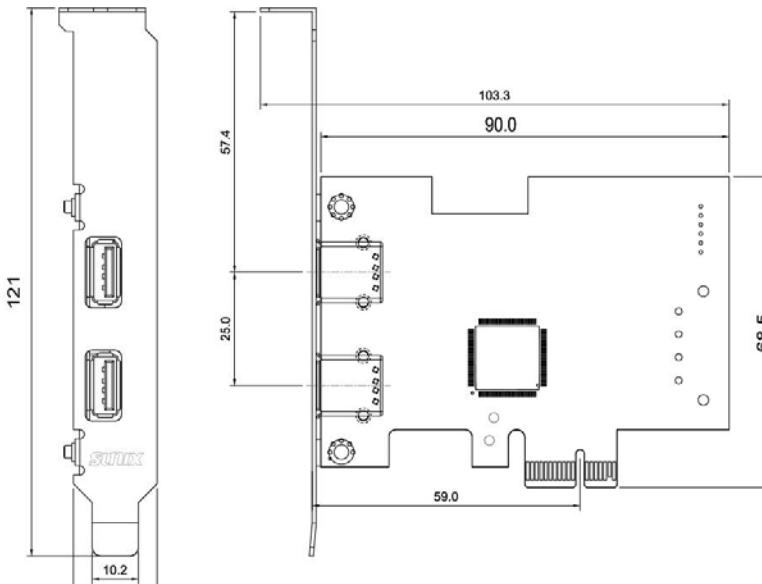
Environment

Operation Temperature	0 to 60°C (32 to 140°F)
Operation Humidity	5 to 95% RH
Storage Temperature	-20 to 70°C (-4 to 158°F)

Standards and Certifications

EMC	CE, FCC, C-Tick, VCCI, BSMI, Class B Standard
Green	RoHS, CRoHS, WEEE

Physical Characteristics

PCB Dimension	90 x 68.5 mm
Bracket	Standard 121 mm
Bracket Space	1
	Unit = mm
Mechanical Drawings	

Package

- USB2400 – 2-port USB PCI Express Add-On Card
- User Manual

Headquarters

Taiwan

Sunix Co., Ltd.

Tel : +886-2-8913-1987
 Fax : +886-2-8913-1986
 Website : www.sunix.com
 E-mail : info@sunix.com

America

SUNIX USA, INC.

Tel : +1 (626) 765-4031
 Fax : +1 (909) 594-8906
 Website : www.sunix.com
 E-mail : sales.sunixusa@sunix.com

Germany

Sunix Vertriebs GmbH

Tel : +49(0)6995-20 9506
 Fax : +49(0)6995-20 8267
 Website : www.sunix.com
 E-mail : info@sunix-euro.de

China

Shanghai Office

Tel : +86-21-6469-1670
 Fax : +86-21-6468-8346
 Website : www.sunix.com.cn
 E-mail : info@sunix.com.cn

Beijing Office

Tel : +86-10-65308429
 Fax : +86-10-65308421
 Website : www.sunix.com.cn
 E-mail : info@sunix.com

Shenzhen Office

Tel : +86-07-5533500418
 Website : www.sunix.com.cn
 E-mail : info@sunix.com