



USB4300NS

USB3.0 4-port PCI Express Card

(USBIF TID 350000211)



Introduction

Super-Speed USB3.0 interface is the next revolution in I/O interconnect standards that will deliver the bandwidth and features required by PCs, consumer electronics and communications devices. With 10 times faster throughput than USB 2.0 standard and backward compatible with current USB device features, USB3.0 interface will be the trendy of IT technology.

SUNIX USB4300NS is a four-port Super-Speed USB3.0 PCI Express card, and it is compliant with the PCI Express Generation 2 specification for host PC system. It works up to 5 Gbps for data transfer when connecting to USB 3.0 compliant peripherals, while maintaining compatibility with existing USB peripheral devices. With USB Hot-Swapping and Plug-n-Play function, you don't have to worry about running out of slots on your mother board or complicated hardware installation process.

SUNIX USB4300NS card supports USB3.0 High-Speed device and backward compatible with USB2.0 High-Speed and USB1.1 Full-Speed devices. It is an ideal choice for external storage devices, MP3 players, external writer, digital cameras, webcam, networking and video devices, and all other USB devices.


Features

- **USBIF certificated USB3.0 host card TID 350000211**
- Supports PCI Express Base Specification Revision 2.0.
- Single-lane (x1) PCI Express throughput rates up to 5 Gbps.
- Compliant with Universal Serial Bus 3.0 specification Revision 1.0.
- Compliant with xHCI (eXtensible Host Controller Interface) specifications Revision 1.0
- Supports simultaneous operation of multiple USB 3.0, USB 2.0 and USB 1.1 devices.
- Supports USB data transfer rate of 1.5/12/480/5000 Mbps.
- Expands four external USB3.0 Super-Speed ports on the system.
- Each USB port supplies +5V / 900mA power output to USB device.
- Hot-swapping feature allows to connect / disconnect devices without powering down the system.
- Driver supports for Microsoft Windows XP, Vista, 7, 8, 8.1 and 10 operation systems.
- Certified by CE, FCC, RoHS, and Microsoft WHQL approval.

Specifications

Interface	Single-Lane (x1) PCI Express Gen2
Mode	USB3.0
Controller	Renesas uPD720201
USBIF TID	350000211
Port	4 external USB3.0 ports
Speed	Data Transfer rate of 1.5/12/480/5000 Mbps. Low Speed (1.5Mbps), Full Speed(12Mbps), High Speed(480Mbps), Super Speed(5Gbps)
Power Input	SATA Type Power Connector
Power Output	+5V / 900mA (each port)
PCB Dimension	78 (W) x 99(L)mm
Bracket	Standard 121mm
Certified	CE, FCC, VCCI, BSMI
O.S. Support	Windows XP/2003/Vista/7/2008/8/8.1/10 (32/64-bit) Windows Server 2008 R2 SP1/2012/2012 R2/2016/2019(64-bit) Linux 2.6.31 or later (Linux OS already implemented USB3.0 driver)
Environment	Operation temp. 0 °C ~ 57 °C Operation humidity: 5 ~ 95% RH Storage temp.-20 °C ~ 85 °C

Mechanical Drawings (Unit = mm)

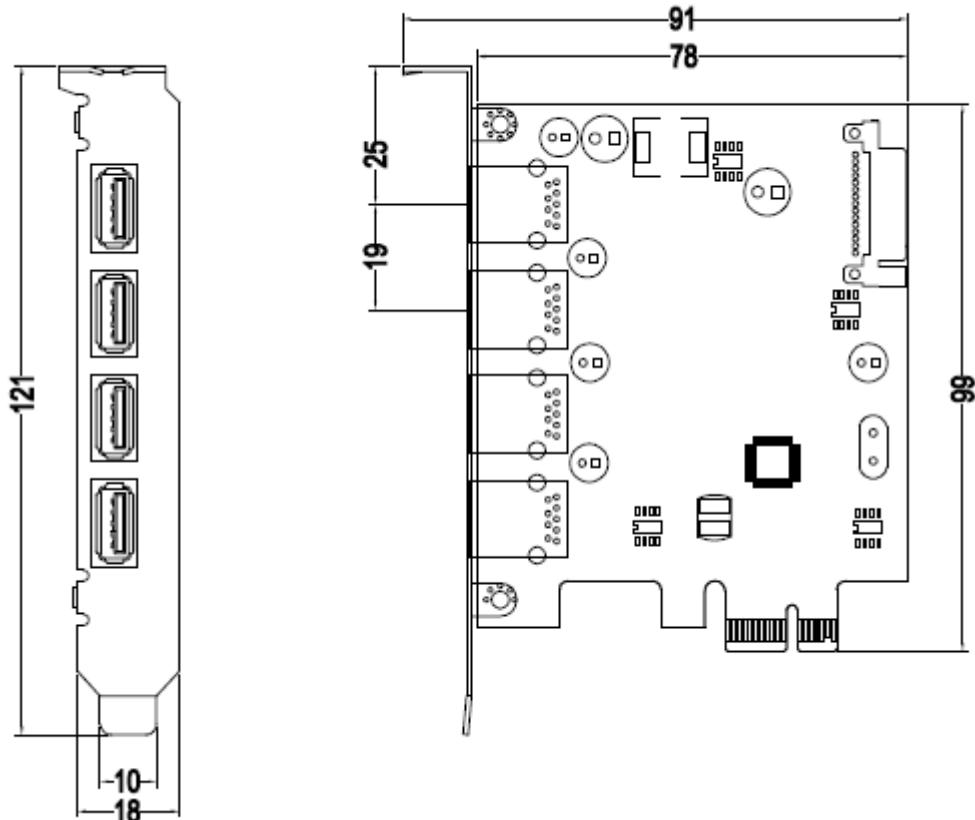

Package

- USB4300NS - USB3.0 4-port PCI Express Card
- CD Driver
- User's Manual

Headquarters

Taiwan

Sunix Co., Ltd.

Tel : +886-2-8913-1987
 Fax : +886-2-8913-1986
 Website : www.sunix.com
 E-mail : info@sunix.com

America

SUNIX USA, INC.

Tel : +1 (909) 594-8022
 Fax : +1 (909) 594-8906
 Website : www.sunix.com
 E-mail : sales.sunixusa@sunix.com

Germany

Sunix Vertriebs GmbH

Tel : +49(0)6146-60 1345
 Fax : +49(0)6146-60 1346
 Website : www.sunix.com
 E-mail : info@sunix-euro.de

China

Shanghai Office

Tel : +86-21-6469-1670
 Fax : +86-21-6468-8346
 Website : www.sunix.com.cn
 E-mail : info@sunix.com.cn

Beijing Office

Tel : +86-010-65308429
 Fax : +86-010-65308421
 Shenzhen Office
 Tel : +86-755-33500418