

# DS-054

## Modern AI-ready PCs, combining high-performance AMD Ryzen™ 8000-series Zen CPU cores



### Introduction

DS-054 is designed for modern AI-ready PCs, combining high-performance Zen CPU cores with integrated RDNA graphics and built-in AI acceleration. They deliver strong compute performance, efficient power management, and enhanced AI capabilities for productivity, multimedia, and edge applications.

### Specifications

		DS-0540B-U0A1E	DS-0540B-U1A1E
Processor	Processor	AMD R8640 (6 Cores/ 12 Threads)	AMD R8840 (8 Cores/ 16 Threads)
	Chipset	Integrated in SOC	
	BIOS	AMI uEFI 256 Mbit	
Memory	Technology	DDR5	
	Max. Capacity	96GB (48GB per SO-DIMM)	
	Socket	2 x 260-pin SODIMM	
CPU TDP		28W	28W
Thermal Solution		Smart-Fan	Smart-Fan
Display	Graphics Engine	AMD Radeon (8 GPU Compute Units)	AMD Radeon (12 GPU Compute Units)
	Output	1 x HDMI 2.1 (FRL, up to 8K) and 3 x HDMI 2.1 (TMDS, up to 4K@60Hz)	1 x HDMI 2.1 (FRL, up to 8K) and 3 x HDMI 2.1 (TMDS, up to 4K@60Hz)
	Resolution	FRL, up to 8K and TMDS, up to 4K@60Hz	
Ethernet	Controller	1G I210 = 1G Nuvoton EdgeBMC EIO-300 2.5G I226 = 2.5G Nuvoton EdgeBMC EIO-300	
	Interface	Gigabit LAN Controller	
	Connector	2 x RJ-45 10/100/1000 Mbps	
I/O Interfaces	Audio	3.5mm Audio Jack for jack sense (Line-in/out or Mic-in)	
	HDMI (EDID support)	4	4
	USB	1 x USB 3.2 Gen1, 2 x USB2, 1 x USB-C (support DP 5Vx3A)	
	Serial Port	1 x RS-232	
	Switch/button	1 x Power on/off button; 1 x EDID_CLR button	
	LED Indicators	1 x Power, 1 x Storage Access	
Expansion	M.2	2 x 2230 E Key WiFi/Hailo 8 1 x 2280 M Key PCIe3	
	M.2	M.2 2242 M Key PCIe4	
Power Requirement	Power Management	ACPI 3.0	
	Input Voltage	12-24V (ATX/AT mode)	
Trusted Platform Module	TPM2.0	fTPM 2.0, Default TPM 2.0 (NPCT764AAEYX), BOM option by project support	
Watchdog Timer	Output	Interrupt, system reset	
	Interval	255-level timer interval, setup by software	
Physical Characteristics	Mounting	Wall Mount	
	Dimensions (W x D x H)	180 x 177 x 29.9 mm	
	Weight	0.9 kg (1.98 lb)	
Environment	Operating Temperature	0 ~ 40° C (32 ~ 104F) with 0.7 m/s airflow	
	Relative Humidity	95% @ 40° C (non-condensing), operating	
Software Support		DeviceOn/Edge BMC/SUSI	
Operating System	Operating System	Win11LTSC x64	
	Linux	supported by project	
Certifications	EMC	CE, FCC Class B, CCC, BSMI, UKCA	
	Safety	UL, CB, CCC, BSMI, UKCA (No RED certification)	


### Features

- AMD RYZEN™ Embedded 8000, Hi-Performance Zen4 CPU up to 8C / 16T
- AMD Radeon™ RDNA 3 graphics with integrated XDNA NPU, up to 16 TOPS AI performance
- 29.9mm-thin chassis ideal for space-limited installation
- 1 x HDMI 2.1 (FRL, up to 8K) and 3 x HDMI 2.1 (TMDS, up to 4K@60Hz)
- Cable-less design for easy maintenance
- Supports DeviceOn/SignageCMS for intuitive signage content managing, remote monitoring and control
- Supports Out-of-Band (OOB) remote management and EDID
- Equipped with firmware TPM (fTPM) by default; discrete TPM 2.0 available as a BOM option based on project request


McAfee Acronis WISE-PaaS/SignageCMS WISE-DeviceOn

## Dimensions


Unit: mm [inch]

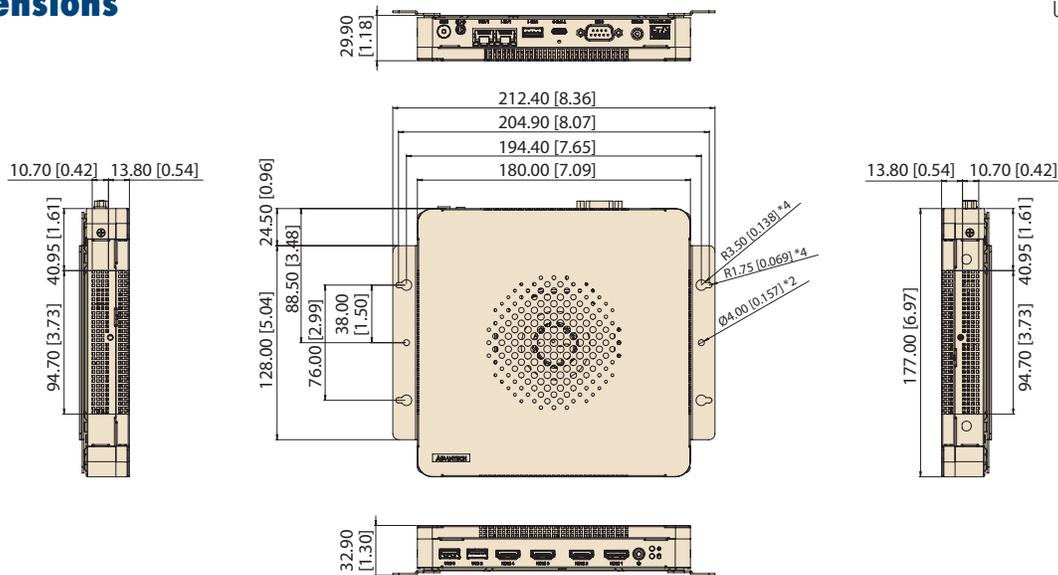

## Front View



## Rear View



## Ordering Information

Part Number	Description
DS-0540B-U0A1E	AMD R8640 4 HDMI, 2 LAN, 4 HDMI, FAN, EDID, OOB, Audio, Power SW, TypeC
DS-0540B-U1A1E	AMD R8840 4 HDMI, 2 LAN, 4 HDMI, FAN, EDID, OOB, Audio, Power SW, TypeC

## Embedded CMS

Part Number	Description
server(virtual):32ASDSC3SWPR01	SignageCMS Windows Server Pro License/300 client
server(sticker):36ASDSC3SWPR01	SignageCMS Windows Server Pro License/300 client
client(virtual):32ASDSC3CWPR01	SignageCMS Windows Pro Client License
client(sticker):36ASDSC3CWPR01	SignageCMS Windows Pro Client License

## Packing List

Part Number	Description
-	1 x DS-054
96PSA-A65W19V1-3	1 x 19V power adapter
1960057740T002	2 x Wall Mount brackets and screws

## Embedded OS

Part Number	Description
TBD	Win11 LTSC Entry 64b 24H2 ENU

## RAM & Storage

Part Number	Description
SQR-SD5N8G5K6HNGAG	SODIMM DDR5 5600 8GB 1Gx16 (0-95) Hynix
SQR-SD5N16G5K6HNGAG	SODIMM DDR5 5600 16GB 2Gx8 (0-95) Hynix
SQF-C4MV2-128GDEDC	QF M.2 2242 720-D 128G 3D TLC BiCS5 (0-70°C)
SQF-C4MV2-256GDEDC	SQF M.2 2242 720-D 256G 3D TLC BiCS5 (0-70°C)
SQF-C4MV2-256GDEFM	SQF M.2 2242 730-D 256G 3D TLC BiCS5 (-20-85°C)

## Power Cord

Part Number	Description
1700001524	3-pin power cord (US)
170203183C	3-pin power cord (EU)
170203180A-01	3-pin power cord (UK)
1700008921	3-pin power cord with PSE (Japan)
1700019146	3-pin power cord (CCC)
1700018553	3-pin power cord (AU)
1700024849-01	3-pin power cord (TW)

## Optional Items

Part Number	Description
AIW-169BR-GX1	IEEE 802.11ax (2.4GHz+5GHz+6GHz)+BT 5.3, 2T2R
1751000654-01	RF Cable
1751000412-01	RF Cable
AIW-512	2 x WiFi 6E Dipole ANTENNA