

W10IE3S-POA1

10.1" Intel® Celeron® N6211 PO Series HMI Panel PC



KEY FEATURES

- 10.1", 1920 x 1200, 700 nits
- Intel® Celeron® Elkhart Lake N6211 Processor
- Slim-line design in open-frame housing
- Multi-touch PCAP flat design
- Dual Gigabit Ethernet
- Suitable for KIOSK applications

INTRODUCTION

Winmate PO Series HMI offers a versatile solution for industrial automation and kiosk applications, with sizes ranging from 7" to 27". Featuring Intel® processors, a slim-line open-frame design, and a flat multi-touch PCAP display, it delivers sleek aesthetics and advanced functionality. With certifications for rugged environments and options like dual Gigabit Ethernet and IP65-rated front protection, this HMI is ideal for interactive kiosks, process control, and smart manufacturing, ensuring reliable performance and seamless integration.

SPECIFICATIONS

Display

Resolution	1920x1200	Size	10.1 inches
Contrast Ratio	800:1	Panel Brightness	700.0 nits
View Angles	89,89,89,89	Active Area	216.576x135.36 mm
Touch / Glass	Projected Capacitive Multi Touch Screen		

System Specification

WLAN	Support (Optional)	BT	Support (Optional)
Processor	Intel® Celeron® N6211 (up to 3.0GHz)	Memory	4GB(Default) (Default) 8GB (Optional) 16GB (Optional)
Storage	128GB SSD(Default) (Default) 256GB SSD (Optional) 512GB SSD (Optional) 1TB (Optional) 2TB 1 x SATA III for 2.5" SSD/HDD (Optional)	Ethernet controller	2 x Intel® Ethernet Controller
Security	TPM 2.0	Operating System	Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 22.04 (Optional)

Mechanical

Dimension	264 x 190 x 48 mm	Weight	1.3 kg
Mounting	Open frame (Default) Panel mount (Optional) VESA mount (Optional)	Enclosure	Metal Housing
Cooling System	Fanless Design		

Environment

Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C
Storage Temperature	-10°C to 60°C		

Certification

Certification	CE, FCC
---------------	---------

IO Ports

Power Input	1 x 12V DC, 2.5φ DC jack	USB Port	2 x USB3.2 Gen2x1 (Type-A)
Serial Port	1 x RS232/422/485 (Default RS232) 1 x RS232	Video	1 x HDMI 2.0 (Optional)
Audio	2 x Speaker	Expansion Port	1 x M.2 2242 B-Key Slot (for SATA III SSD) 1 x M.2 2230 E-Key Slot (for Wi-Fi module)
LAN	2 x 2.5 Giga LAN RJ45 Connector	Indicator	1 x LED Indicator for power 1 x LED Indicator for storage
Brightness Knob	1 x Brightness Adjustment Knob		


Accessory

Accessory	100~240V AC to DC Adapter Power Cord VESAs screws
-----------	---

Power

Power Rating	12V DC	Adapter	12V 50W
--------------	--------	---------	---------

DIMENSIONS UNIT:MM

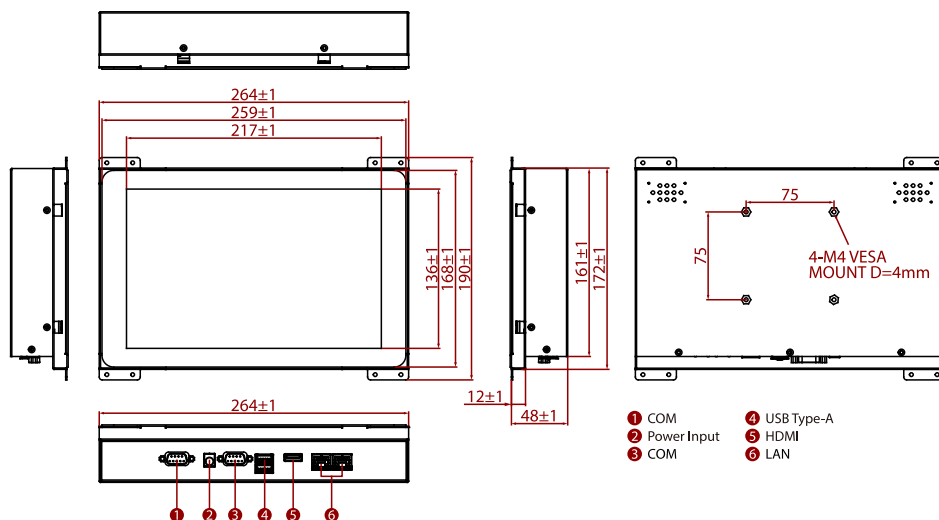

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.