

X6-MTH-ORN


Edge AI Box



Package Contents

- 1 X6-MTH-ORN System Unit

Front View

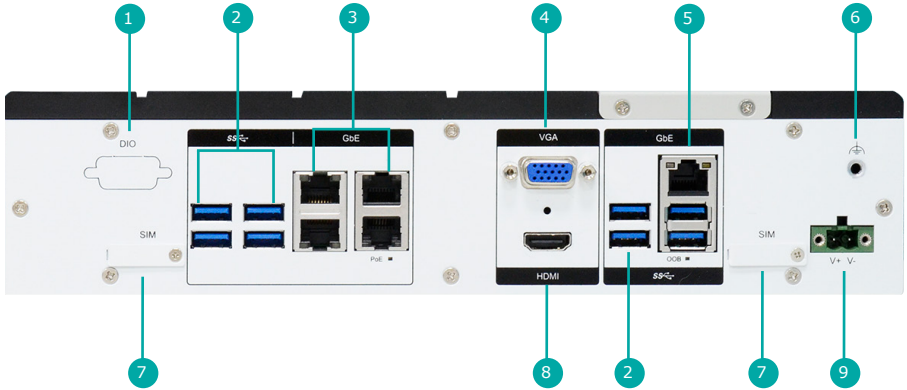

1

DIO

2

USB 3.2 Gen1

3

RJ45 GbE Ports

4

VGA

5

▲ RJ45 GbE
▼ USB 3.2 Gen1

6

Grounding

7

SIM Slot


8

HDMI

9

2-Pin Power Terminal Block

Rear View

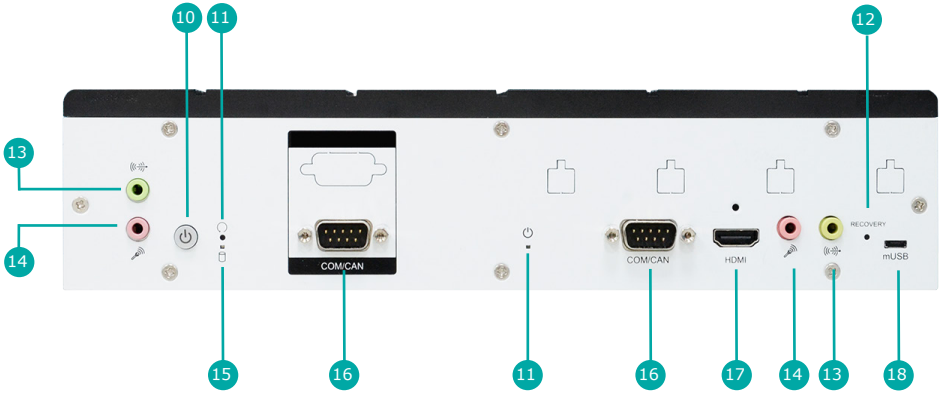

10 Power Button

11 Reset Button

12 Recovery Button

13 Line-Out

14 Mic-In

15 HDD LED

16 CAN bus/ COM

17 HDMI

18 micro USB


Removing the Chassis Cover

Please observe the following guidelines and follow the instructions to open the system.

1. Make sure the system and all other peripheral devices connected to it have been powered off.
2. Disconnect all power cords and cables.


Step 1:

To remove the bottom cover - The 6 screws on the bottom of the system are used to secure the cover to the chassis. Remove the screws and put them in a safe place for later use.

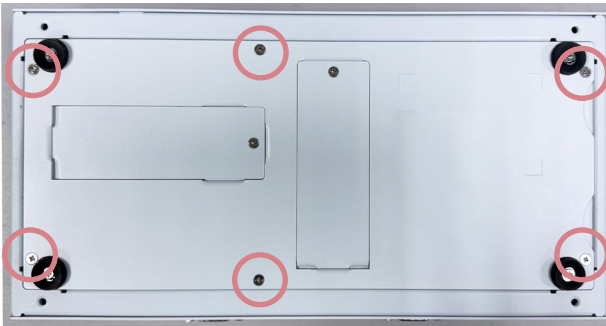


Step 2:

Lift the cover by hand using the notch.

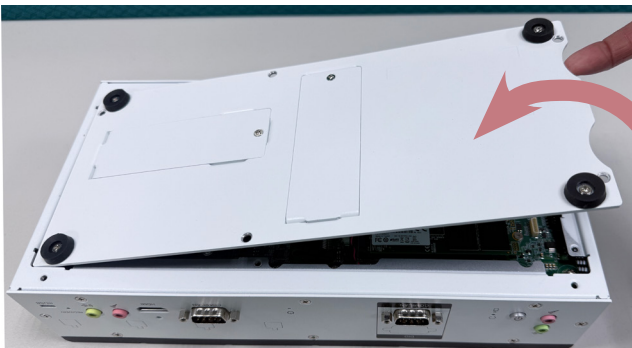


Step 3:

The board can be easily accessed after the chassis cover is removed.

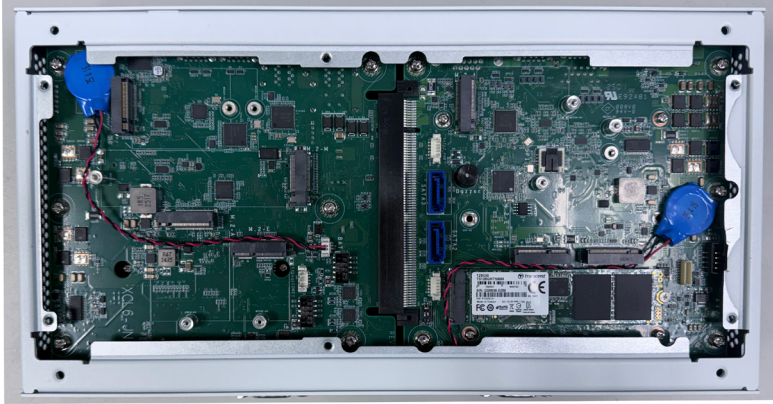


Step 2:

Connect the internal cable to the board's antenna connector, screw the antenna connector through the antenna hole with washers and nuts, and screw on the antenna as illustrated below.

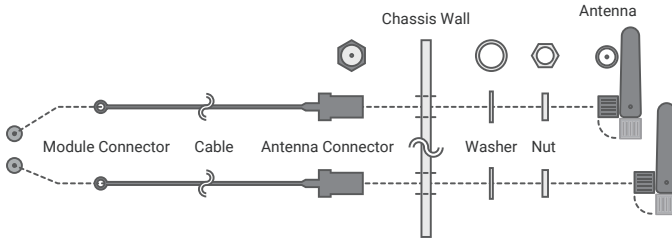


Step 2:

Please follow the steps below to install the card into the socket. Insert the card into the socket at an angle while making sure the notch and key are perfectly aligned.

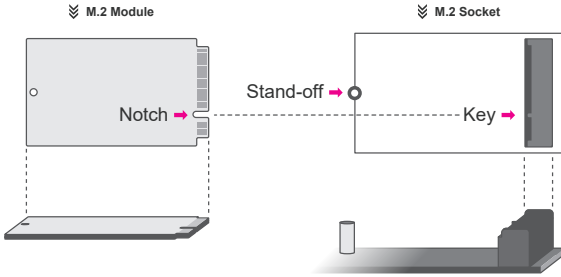

Step 3:

Press the end of the card far from the socket down until against the stand-off.




Step 4:


Screw tight the card onto the stand-off with a screw driver and a stand-off screw until the gap between the card and the stand-off closes up. The card should be lying parallel to the board when it's correctly mounted.



Mounting Options

The wall mount kit containing two mounting brackets can be attached to the bottom of the system for mounting onto desired locations, such as walls, stands, or shelves. Locate the mounting holes on the bottom of the system as shown in the photo. Screw on the two brackets onto the system with six screws as illustrated below.

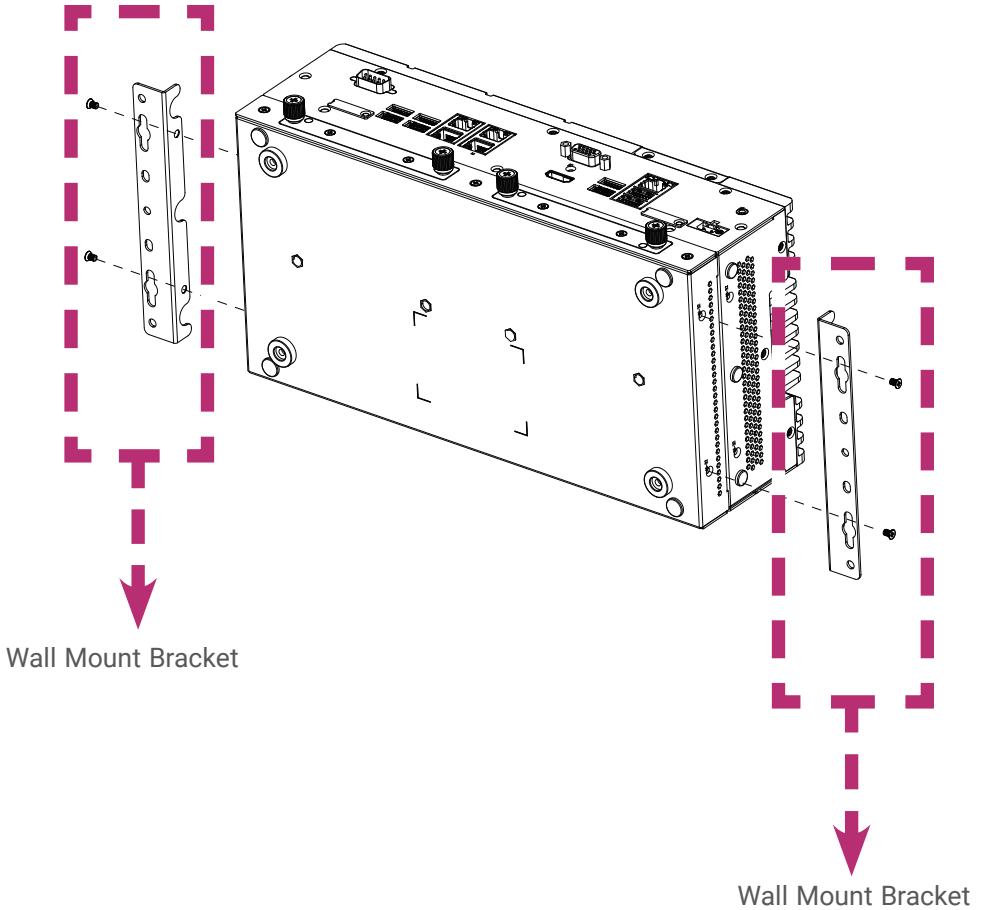

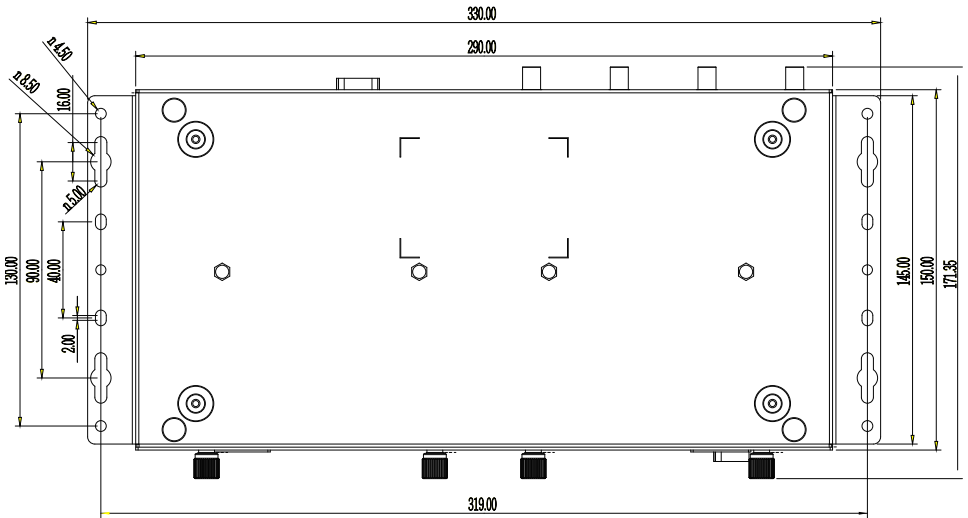

DFI reserves the right to change the specifications at any time prior to the product's release. This QR may be based on the product's revision. For more documentation and drivers, please visit the download page at www.dfi.com/downloadcenter, or via the QR codes to the right.

