




MCC2F00

Mini PCIe to 2-port CAN FD Communication Card

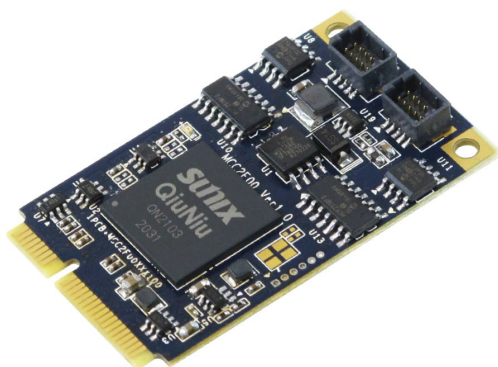

Introduction

SUNIX MCC2F00, industrial miniPCIe to 2-port high speed CAN FD communication card, is designed for Edge Computer that enables CAN FD and CAN bus data communication capability for electric vehicle industry application. This board not only built-in SUNIX Digital-I/O controller, **QiuNiu**, but also built with many of SUNIX advanced features and technologies. In addition, SUNIX provides Windows and SocketCAN drivers, allowing users to use this card on Windows and Linux operating systems. SUNIX MCC2F00 card enriches CAN 2.0/ CAN FD interface expandable capacity; it is the best CAN bus communication solution for electric vehicle and AVG/AMR, IVI (In-Vehicle Infotainment) applications.

Features

- Suitable for mini PCIe slot based on PCI Express communication
- Equipped with high reliable SUNIX **QiuNiu** controller
- Complies with CAN specifications 2.0 and FD
- CAN FD bit rates for the data field up to 8 Mbit/s
- Plug-n-Play, I/O address and IRQ assigned by system
- Support Windows and SocketCAN drivers

Specifications

Board Level

Interface	mini PCIe
Controller	SUNIX QiuNiu controller
BUS	PCI Express 2.0 x1
IRQ & IO	Assigned by System
ESD Protection	±15KV IEC61000-4-2 Air Gap Discharge ±8KV IEC61000-4-2 Contact Discharge

CAN Communication

Type	CAN 2.0 / CAN FD	Channel	2-channel
Arbitration bit rate	1 Mbit/s	Data bitrate	8 Mbit/s
PCB Connector	2 pcs x WAFER 2x5P pitch 1.0mm (180°)		

Software Support

Microsoft	Windows 10 (32/64bit) / 11 (64bit)
Linux SocketCAN	Linux Kernel 5.x / 6.x

Declaration

Green Product	RoHS, WEEE
----------------------	------------

Regulatory Approvals

Hardware	CE / FCC / VCCI / BSMI
-----------------	------------------------


Environment

Operation Temperature	-20 to 70°C (-4 to 158°F)
Operation Humidity	5 to 95% (non-condensing)
Storage Temperature	-20 to 85°C (-4 to 185°F)

Dimension


PCB Dimension	30 x 50 mm
---------------	------------

Unit : mm

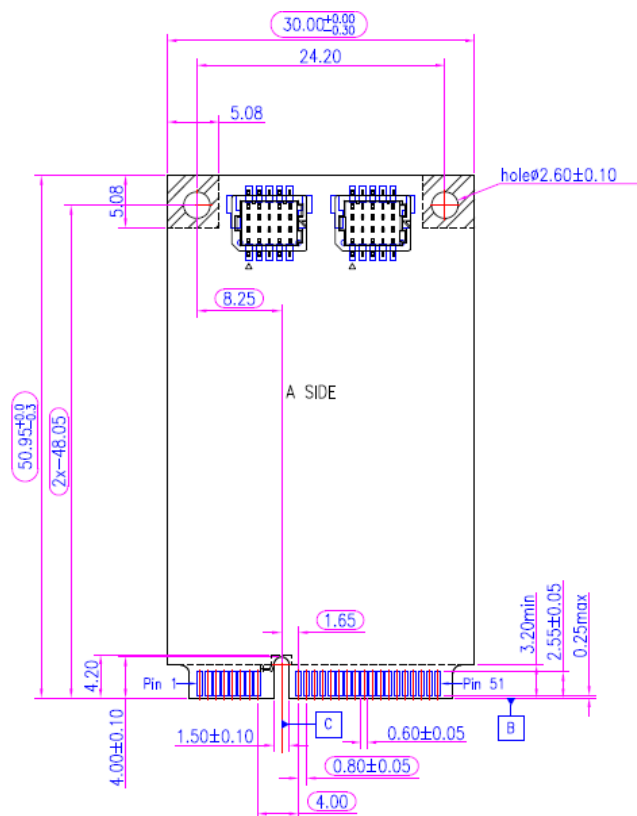

Pin Assignment

■ CAN interface



PIN	Signal
1	-
2	CAN L
3	GND
4	-
5	-
6	GND
7	CAN H
8	-
9	-

Package

- MCC2F00 Mini PCIe to 2-port CAN FD communication Card
- D-Sub 9-pin male with nuts on cable, 30 cm x 2pcs



TAIWAN
TAIPEI HEADQUARTERS
Tel : +886-2-8913-1987

R&D CENTER
Tel : +886-2-8913-1987
Email : info@sunix.com.tw

CHINA
BEIJING
Tel : +86-10-65308421

SHENZHEN
Tel : +86-0755-82339025
Email : info@sunix.com.cn

EUROPE
GERMANY
Tel : +49 (0) 69-95209506
Email : info@sunix-euro.de