


ARS310-W880

ARS310-Q870

Intel® Core™ Ultra Processors
Desktop
microATX

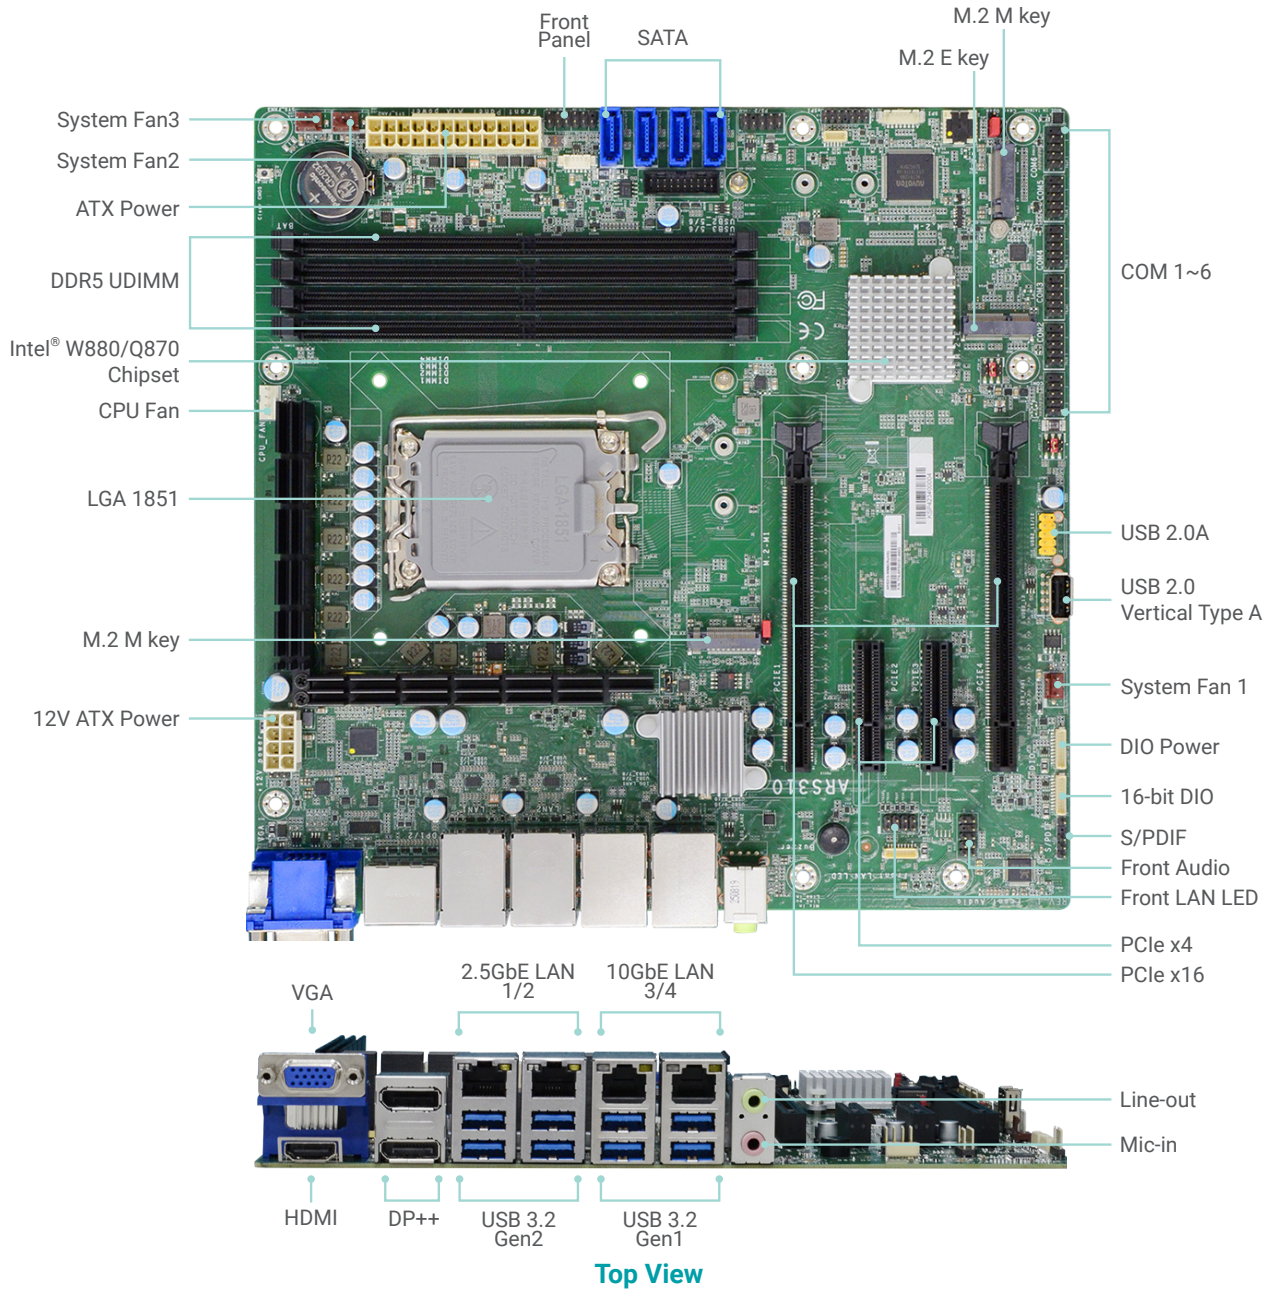

KEY FEATURES



DDR5

4 DDR5 UDIMM up to 256GB




4K High Resolution

Supports 4K resolution



Quad Displays

VGA, 2 DP++, HDMI



Multiple Expansion


2 PCIe x16, 2 PCIe x4, 1 M.2 E key, 2 M.2 M key, 4 SATA 3.0




Rich I/O

2 2.5GbE + 2 10GbE, 6 COM, 4 USB 3.2 Gen2, 6 USB 3.2 Gen1, 3 USB 2.0

BLOCK DIAGRAM

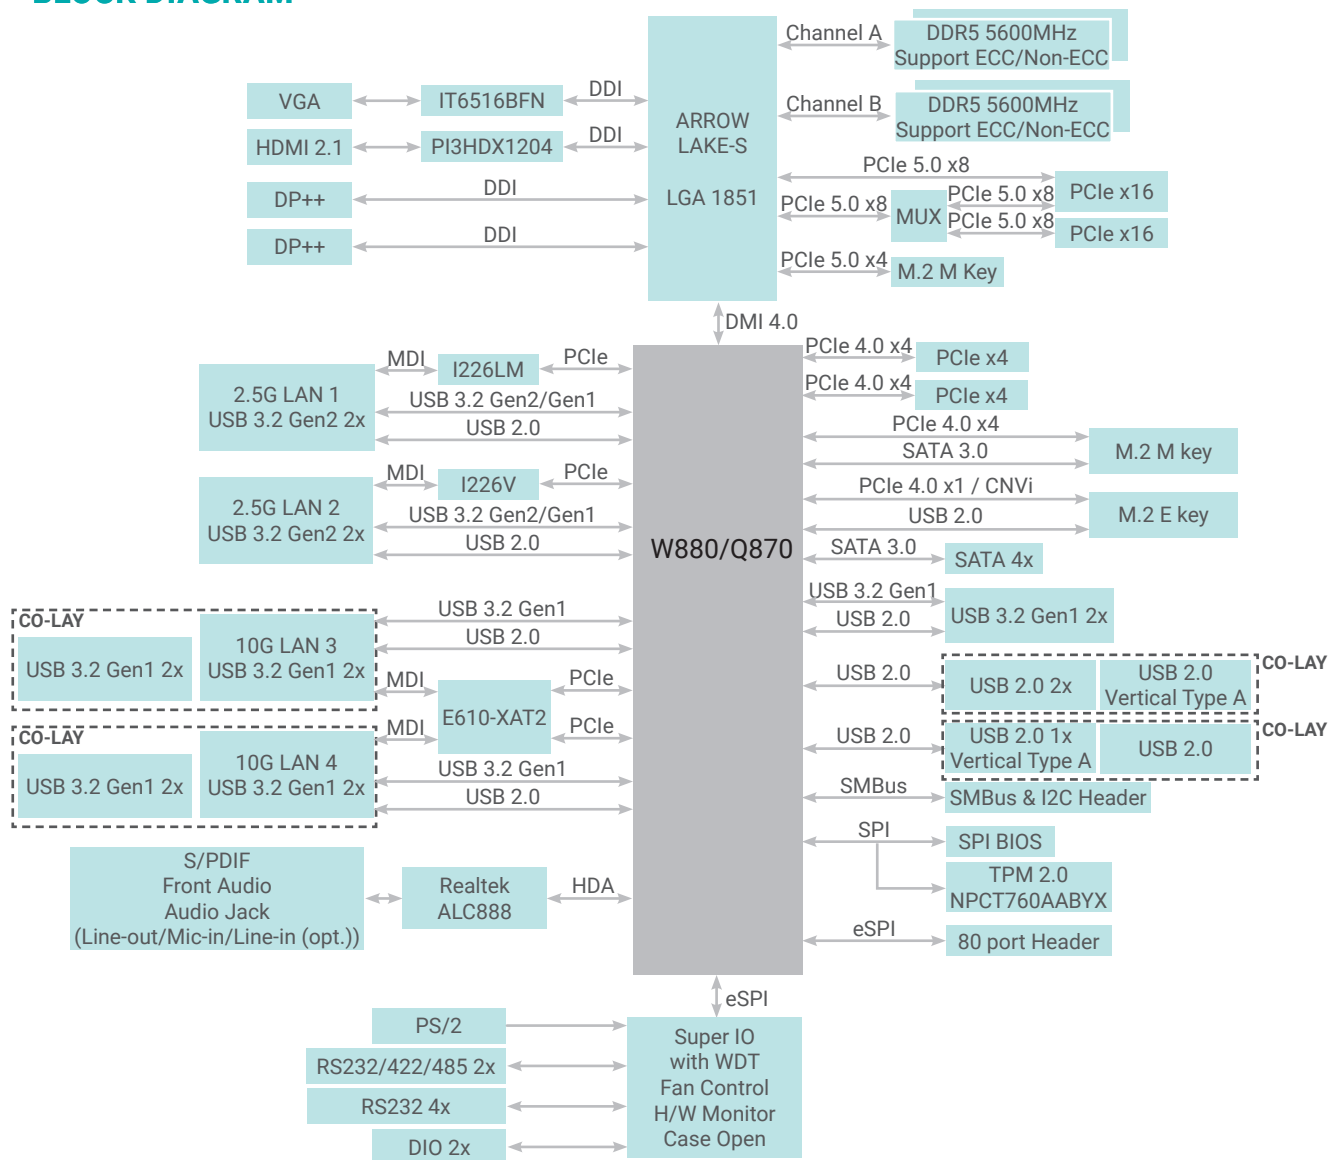

MECHANICAL DRAWING

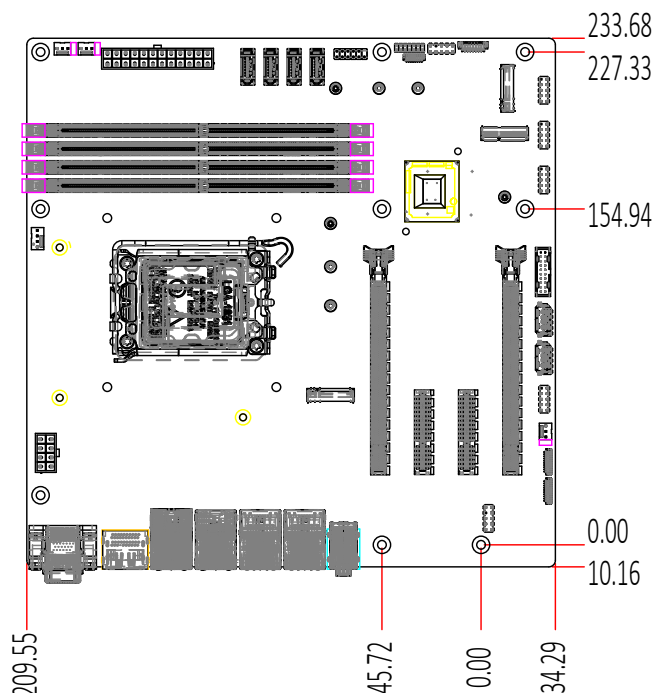

SPECIFICATION

Model Name		ARS310-W880	ARS310-Q870
SYSTEM	Processor	Intel® Core™ Ultra LGA 1851 Socket Processors, support up to TDP 125W Intel® Core™ Ultra 9 285 (24 Cores, 36M Cache, up to 5.6 GHz); 65W Intel® Core™ Ultra 9 285T (24 Cores, 36M Cache, up to 5.4 GHz); 35W Intel® Core™ Ultra 7 265 (20 Cores, 30M Cache, up to 5.3 GHz); 65W Intel® Core™ Ultra 7 265T (20 Cores, 30M Cache, up to 5.3 GHz); 35W Intel® Core™ Ultra 5 245 (14 Cores, 24M Cache, up to 5.1 GHz); 65W Intel® Core™ Ultra 5 245T (14 Cores, 24M Cache, up to 5.1 GHz); 35W Intel® Core™ Ultra 5 225 (10 Cores, 20M Cache, up to 4.9 GHz); 65W Intel® Core™ Ultra 5 225T (10 Cores, 20M Cache, up to 4.9 GHz); 35W	
	Chipset	Intel® W880 Chipset	Intel® Q870 Chipset
	Memory	Four 288-pin UDIMM up to 256GB (ECC/Non-ECC) Dual Channel DDR5 up to 5600 MHz *Speed support list follow User's Manual	Four 288-pin UDIMM up to 256GB (Non-ECC) Dual Channel DDR5 up to 5600 MHz *Speed support list follow User's Manual
	BIOS	AMI SPI 256Mbit	AMI SPI 256Mbit
	Controller	Intel® UHD Graphics 700 series	Intel® UHD Graphics 700 series
GRAPHICS	Feature	OpenGL 4.5, DirectX 12, OpenCL 2.1 HW Decode: AVC/H.264, MPEG2, VC1/WMV9, JPEG/MJPEG, HEVC/H265, VP8, VP9 HW Encode: MPEG2, AVC/H264, JPEG, HEVC/H265, VP8, VP9	OpenGL 4.5, DirectX 12, OpenCL 2.1 HW Decode: AVC/H.264, MPEG2, VC1/WMV9, JPEG/MJPEG, HEVC/H265, VP8, VP9 HW Encode: MPEG2, AVC/H264, JPEG, HEVC/H265, VP8, VP9
	Display	1 x VGA 2 x DP++ 1 x HDMI 2.0a VGA: resolution up to 1920x1200 @ 60Hz DP++: resolution up to 4096x2304 @ 60Hz HDMI: resolution up to 4096x2160 @ 24Hz	1 x VGA 2 x DP++ 1 x HDMI 2.0a VGA: resolution up to 1920x1200 @ 60Hz DP++: resolution up to 4096x2304 @ 60Hz HDMI: resolution up to 4096x2160 @ 24Hz
	Quad Displays	VGA + 2 DP++ + HDMI	VGA + 2 DP++ + HDMI
	Interface	2 x PCIe x16 (Gen 5, 16 or 8+8) - Support PCIe1/PCIe4 : single at x16(PCIe1) - Support PCIe1/PCIe4 : dual at x8(PCIe1)/x8(PCIe4) - Support PCIe1 : Riser card x16 or x8/x8 selected by Jumper 2 x PCIe x4 (Gen 4)	2 x PCIe x16 (Gen 5, 16 or 8+8) - Support PCIe1/PCIe4 : single at x16(PCIe1) - Support PCIe1/PCIe4 : dual at x8(PCIe1)/x8(PCIe4) - Support PCIe1 : Riser card x16 or x8/x8 selected by Jumper 2 x PCIe x4 (Gen 4)
EXPANSION	M.2	1 x M.2 2242/2260/2280 M key (PCIe x4 Gen5 NVMe support) 1 x M.2 2242/2260/2280 M key (PCIe x4 Gen4 NVMe/SATA support) 1 x M.2 2230 E key (PCIe/USB 2.0/Intel CNVi support) (Discrete Wifi 6E support)	1 x M.2 2242/2260/2280 M key (PCIe x4 Gen5 NVMe support) 1 x M.2 2242/2260/2280 M key (PCIe x4 Gen4 NVMe/SATA support) 1 x M.2 2230 E key (PCIe/USB 2.0/Intel CNVi support) (Discrete Wifi 6E support)
	Audio Codec	Realtek ALC888	Realtek ALC888
ETHERNET	Controller	1 x Intel® I226-LM 1 x Intel® I226-V 2 x Intel® E610-XAT2	1 x Intel® I226-LM 1 x Intel® I226-V
REAR I/O	Ethernet	2 x 2.5GbE + 2 x 10GbE (RJ-45)(Default) or 2 x 2.5GbE (RJ-45)(Optional, LAN3/4)	2 x 2.5GbE (RJ-45)(Default, LAN3/4)
	USB	4 x USB 3.2 Gen 2 4 x USB 3.2 Gen 1	4 x USB 3.2 Gen 2 4 x USB 3.2 Gen 1
	Display	2 x DP++ 1 x HDMI 2.0a 1 x VGA	2 x DP++ 1 x HDMI 2.0a 1 x VGA
	Audio	1 x Line-out 1 x Mic-in 1 x Line-in (opt. by request, MOQ required)	1 x Line-out 1 x Mic-in 1 x Line-in (opt. by request, MOQ required)
INTERNAL I/O	Serial	2 x RS-232/422/485 (RS-232 w/ power) (2.54mm pitch) 4 x RS-232 (2.54mm pitch)	2 x RS-232/422/485 (RS-232 w/ power) (2.54mm pitch) 4 x RS-232 (2.54mm pitch)
	USB	2 x USB 3.2 Gen 1 3 x USB 2.0 (2.54mm pitch) (1 x USB 2.0 colay vertical Type A)	2 x USB 3.2 Gen 1 3 x USB 2.0 (2.54mm pitch) (1 x USB 2.0 colay vertical Type A)
	Audio	1 x Front Audio Header 1 x S/PDIF	1 x Front Audio Header 1 x S/PDIF
	SATA	4 x SATA 3.0 (up to 6Gb/s) RAID 0/1/5/10	4 x SATA 3.0 (up to 6Gb/s) RAID 0/1/5/10
	PS/2	1 x PS/2 (2.54mm pitch)	1 x PS/2 (2.54mm pitch)
	DIO	4-IN / 8-OUT DIO	4-IN / 8-OUT DIO
	SMBus	1 x SMBus	1 x SMBus
WATCHDOG TIMER	Output & Interval	System Reset, Programmable via Software from 1 to 255 Seconds	System Reset, Programmable via Software from 1 to 255 Seconds
SECURITY	TPM	TPM 2.0	TPM 2.0

SPECIFICATION

Model Name		ARS310-W880	ARS310-Q870
POWER	Type	ATX	ATX
	Connector	8-pin ATX 12V power	8-pin ATX 12V power
		24-pin ATX power	24-pin ATX power
	Consumption	TBD	TBD
OS SUPPORT	RTC Battery	CR2032 Coin Cell	CR2032 Coin Cell
	Microsoft	Windows 10 IoT Enterprise 64-bit	Windows 10 IoT Enterprise 64-bit
		Windows 11 LTSC	Windows 11 LTSC
ENVIRONMENT	Linux	Linux	Linux
	Temperature	Operating: -5 to 65°C	Operating: -5 to 65°C
		Storage: -20 to 70°C with RTC Battery; -40 to 85°C without RTC Battery	Storage: -20 to 70°C with RTC Battery; -40 to 85°C without RTC Battery
MECHANISM	Humidity	Operating: 5 to 95% RH	Operating: 5 to 95% RH
	MTBF	Storage: 5 to 95% RH	Storage: 5 to 95% RH
		TBD	TBD
STANDARDS AND CERTIFICATIONS	Dimensions	microATX Form Factor	microATX Form Factor
		244mm (9.6") x 244mm (9.6")	244mm (9.6") x 244mm (9.6")
	Height	PCB: 1.6mm Top Side: TBD Bottom Side: TBD	PCB: 1.6mm Top Side: TBD Bottom Side: TBD
STANDARDS AND CERTIFICATIONS	Certifications	CE, FCC Class B, RoHS, UKCA, KC	CE, FCC Class B, RoHS, UKCA, KC

ORDERING INFORMATION

Model Name	P/N	PCH	USB 3.2 Gen2 (10G)	USB 3.2 Gen1 (5G)	USB 2.0	SATA 3.0	TPM	10GbE LAN	2.5GbE LAN	DDR5
ARS310-W880	770-ARS3101-000G	W880	4	6	3	4	dTPM 2.0	2	2	ECC non ECC
ARS310-W880	770-ARS3101-100G	W880						0		ECC non ECC
ARS310-Q870	770-ARS3101-200G	Q870						0		non ECC

PACKING LIST

• 1 ARS310-W880/Q870 motherboard
• 1 COM port cable (Length: 300mm, 2 x COM ports)
• 1 Serial ATA data cable (Length: 500mm)
• 1 I/O shield
• 1 M.2 screw/standoff

OPTIONAL ITEMS

• USB 2.0 port cable (Length: 350/398mm)	A81-001066-016G
• USB 3.2 Gen1 port cable (Length: 320mm)	A81-001052-023G
• COM port cable (Length: 300mm, 2 x COM ports)	A81-015026-023G
• Serial ATA data cable (Length: 500mm, W/LOCK)	332-553001-005G
• Serial ATA data cable (Length: 500mm, W/LOCK, 90D)	A81-002128-017G
• Thermal solution (For 35W, Height: 29.39mm)	A71-101136-000G
• Thermal solution (For 65W, Height: 46mm)	A71-101137-000G
• Thermal solution (For 95W/125W, Height: 110mm)	A71-101145-000G
• DP to HDMI Dongle	612-D2H13M-000G
• M.2-COM4 (M.2 serial port module)	770-M2COM1-000G
• M.2-2LAN (M.2 LAN port module)	770-M22LN2-000G
• M.2-2PSE (M.2 PSE module)	770-M22PS2-000G