EB100-MTU

Intel Core Ultra Processor
Fanless Embedded System



KEY FEATURES

Meteor Lake
Intel Core Ultra5/ Ultra7 Processor

Dual Displays
1 or 2 USB-C DP Alt. mode

One memory SODIMM
1 DDR5 SODIMM up to 32GB


Small Size
111mm(W) x 106mm(D) x 50mm(H)

Rich I/O
up to 2 LAN, 4 USB, 2 COM, 2 USB-C


FC CE RoHS

intel IoT Solutions Alliance


PANEL

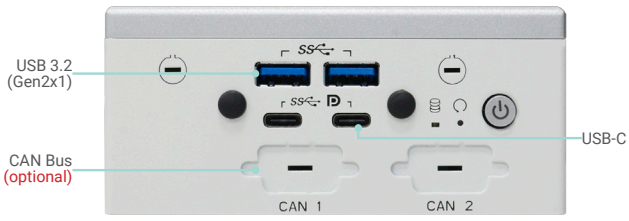

Front View
(EB100-MTU2041)

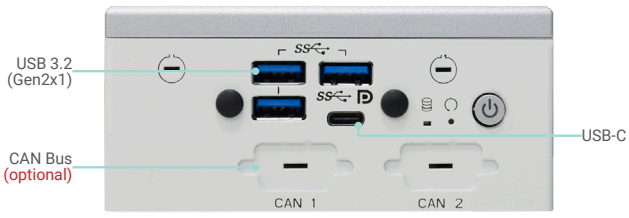


Front View
(EB100-MTU2050)

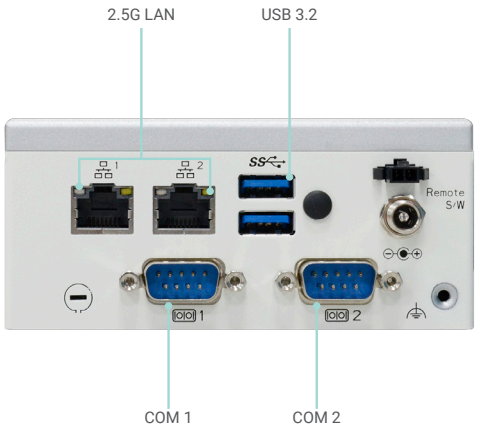

Rear View

DIMENSIONS

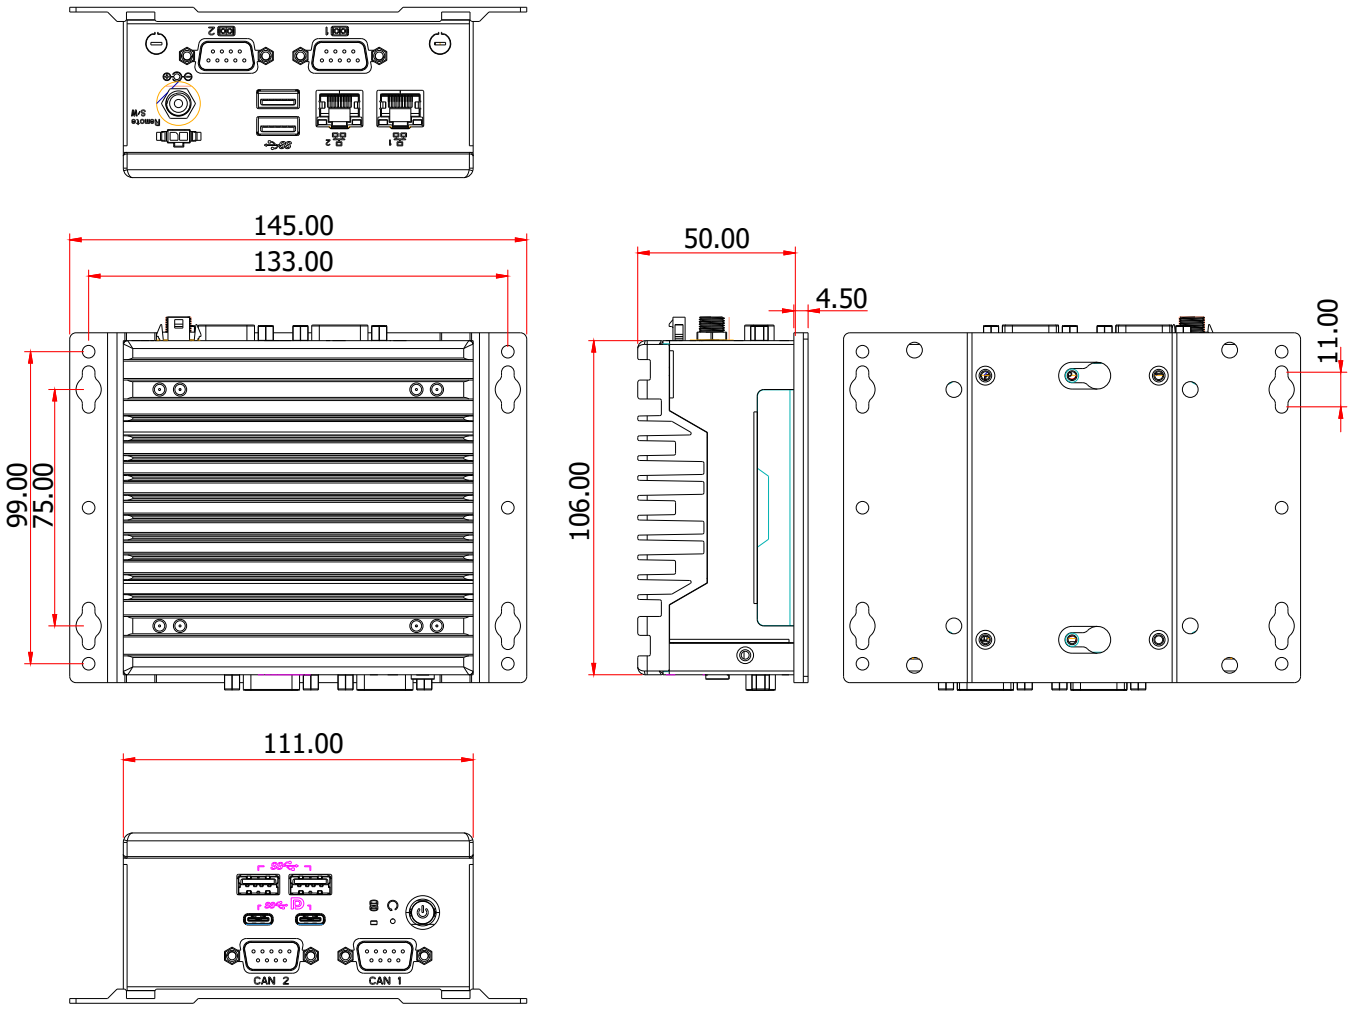

SPECIFICATION

SYSTEM	**Processor**	Intel® Core™ Ultra Processor (Meteor Lake: U-series) • for Fanless Intel® Core™ Ultra 7 155U (2 P-Cores x 1.7 GHz, 8 E-Cores x 1.2 GHz, 12 MB cache, 12W) Intel® Core™ Ultra 5 125U (2 P-Cores x 1.3 GHz, 8 E-Cores x 0.8 GHz, 12 MB cache, 12W)	
	Memory	1x 262-pin SODIMM up to 32GB Single Channel DDR5 5600MHz	
	BIOS	AMI SPI 256Mbit	
GRAPHICS	**Controller**	Intel® Arc™ Graphics	
	Display	**EB100-MTU2041**	**EB100-MTU2050**
		2 x USB-C DP Alt. mode DP: resolution up to 4096x2304@60Hz	1 x USB-C DP Alt. mode DP: resolution up to 4096x2304@60Hz
STORAGE	**Internal**	1 x M.2 2280 M key (PCIe x4)	
EXPANSION	**Interface**	1 x M.2 2230 E Key (PCIe/USB2.0)	
ETHERNET	**Controller**	2 x Intel® I226IT	
LED	**Indicators**	1 x Power LED 1 x Storage LED	
FRONT I/O	**USB**	**EB100-MTU2041**	**EB100-MTU2050**
		2 x USB 3.2(Gen2x1) 2 x USB-C(support DP Alt. Mode)	3 x USB 3.2(Gen2x1) 1 x USB-C(support DP Alt. Mode)
	Buttons	1 x Power button 1 x Reset button	
	CAN Bus (Optional)	2 x CAN Bus port (D-SUB9 connector)	
REAR I/O	**Serial**	1 x RS232/422/485 (default RS232, BIOS selectable) 1 x RS232	
	USB	2 x USB 3.2(Gen2x1)	
	Ethernet	2 x Intel® I226IT (10/100/1000/2500Mbps)	
WATCHDOG TIMER	**Output & Interval**	System Reset, Programmable via Software from 1 to 255 Seconds	
POWER	**Voltage**	DC 12V	
	Connector	DC Jack (5.5 x 2.5 mm)	
OS SUPPORT	**OS Support**	Windows 11	
ENVIRONMENT	**Operating Temperature**	Fanless(CPU TDP 12): -20 to 50°C (wide-temp M.2 SSD)	
	Storage Temperature	-20 to 85°C	
	Relative Humidity	5 to 95% RH (non-condensing)	
MECHANISM	**Construction**	Aluminum + Metal Aluminum	
	Mounting	Wall/VESA rail mount	
	Dimensions (W x H x D)	Fanless:111mm x 50mm x 106mm	
	Weight	TBD	
STANDARDS AND CERTIFICATIONS	**Shock**	Operating: IEC 60068-2-27 Test Ea: Shock Test Half-Sine, 3G @ 11ms, 18 Shock ±X, ±Y, ±Z (each axis 3 times)	
	Vibration	Operating: IEC 60068-2-64 Test Fh: Vibration Board-Band Random Test Random, 1Grms @ 5~500 Hz, 30min Non-Operating: IEC 60068-2-6 Test Fc: Vibration Sinusoidal Test Sweep Sine, 3Grms @ 10~500Hz, 30min	
	Certifications	CE, FCC Class A, RoHS	

DFI reserves the right to change the specifications at any time prior to the product's release. Changes thereafter will be based on the product's revision. Please contact your sales representative for the exact revision offered in your area. All product names mentioned are trademarks of their respective companies. © November 2, 2026 DFI Inc.