

M.2 (S42)

3TEB series

with Innodisk NAND

Customer:

Customer

Part Number:

Innodisk

Part Number:

Innodisk

Model Name:

Date:

Innodisk Approver	Customer Approver

Total Solution For
Industrial Flash Storage

Features:

- SATA III
- Innodisk 3D TLC NAND
- M.2 2242-D2-B+M
- Standard temperature
- iPower Guard
- iData Guard
- Dynamic Thermal Management

Performance:

- Sequential Read up to 560 MB/s
- Sequential Write up to 510 MB/s

Power Requirements:

Input Voltage:	3.3V±5%
Max Operating Wattage:	1.2W
Idle Wattage:	0.3W

Reliability:

Capacity	TBW	DWPD
128GB	150	1.09
256GB	300	1.09
512GB	600	1.09
1TB	1200	1.09

Data Retention	10 Years
Warranty	3 Years

For warranty details, please refer to:

https://www.innodisk.com/en/support_and_service/warranty

Table of contents

1. PRODUCT OVERVIEW	8
1.1 INTRODUCTION OF INNODISK M.2 (S42) 3TEB	8
1.2 PRODUCT VIEW AND MODELS	8
1.3 SATA INTERFACE	8
2. PRODUCT SPECIFICATIONS	10
2.1 CAPACITY AND DEVICE PARAMETERS	10
2.2 PERFORMANCE	10
2.3 ELECTRICAL SPECIFICATIONS	11
2.3.1 Power Requirement	11
2.3.2 Power Consumption	11
2.4 ENVIRONMENTAL SPECIFICATIONS	11
2.4.1 Temperature Ranges	11
2.4.2 Humidity	11
2.4.3 Shock and Vibration	11
2.4.4 Mean Time between Failures (MTBF)	11
2.5 CE AND FCC COMPATIBILITY	12
2.6 RoHS COMPLIANCE	12
2.7 RELIABILITY	12
2.8 TRANSFER MODE	13
2.9 PIN ASSIGNMENT	14
2.10 MECHANICAL DIMENSIONS	16
2.11 ASSEMBLY WEIGHT	16
2.12 SEEK TIME	16
2.13 HOT PLUG	16
2.14 NAND FLASH MEMORY	16
3. THEORY OF OPERATION	17
3.1 OVERVIEW	17
3.2 SATA III CONTROLLER	17
3.3 ERROR DETECTION AND CORRECTION	17
3.4 WEAR-LEVELING	18
3.5 BAD BLOCKS MANAGEMENT	18
3.6 iDATA GUARD	18
3.7 GARBAGE COLLECTION	18
3.8 TRIM	18
3.9 iPOWER GUARD	18
3.10 THERMAL THROTTLING	19
4. INSTALLATION REQUIREMENTS	20

4.1 M.2 (S42) 3TEB PIN DIRECTIONS.....20

4.2 ELECTRICAL CONNECTIONS FOR M.2 (S42) 3TEB20

4.3 DEVICE DRIVE20

5. SMART FEATURE SET21

5.1 SMART ATTRIBUTES.....21

6. PART NUMBER RULE23

REVISION HISTORY

Revision	Description	Date
V1.0	Official Release	Jan., 2024
V1.1	Update Part Number Rule	Feb., 2024

List of Tables

TABLE 1: DEVICE PARAMETERS	10
TABLE 2: PERFORMANCE – 112 LAYERS 3D TLC*	10
TABLE 3: INNODISK M.2 (S42) 3TEB POWER REQUIREMENT	11
TABLE 4: TYPICAL POWER CONSUMPTION	11
TABLE 5: TEMPERATURE RANGE FOR M.2 (S42) 3TEB	11
TABLE 6: SHOCK/VIBRATION TESTING FOR M.2 (S42) 3TEB	11
TABLE 7: M.2 (S42) 3TEB MTBF	12
TABLE 8: M.2 (S42) 3TEB TBW	12
TABLE 9: INNODISK M.2 (S42) 3TEB PIN ASSIGNMENT	14
TABLE 10: SMART COMMAND	21
TABLE 11: SMART ATTRIBUTE	21

List of Figures

FIGURE 1: INNODISK M.2 (S42) 3TEB (TYPE 2242)8

FIGURE 2: INNODISK M.2 (S42) 3TEB DIAGRAM16

FIGURE 3: INNODISK M.2 (S42) 3TEB BLOCK DIAGRAM17

FIGURE 4: SIGNAL SEGMENT AND POWER SEGMENT20

1. Product Overview

1.1 Introduction of Innodisk M.2 (S42) 3TEB

Innodisk M.2 (S42) 3TEB provides high capacity flash memory Solid State Drive (SSD) that electrically complies with Serial ATA (SATA) standard. It supports SATA III standard (6.0GHz) with high performance, achieves excellent performance up to 2CH standard by cost effective controller with 2CH.

With Innodisk L³ FW architecture, combining our signature 4K mapping algorithm L² FW architecture with powerful LDPC technology, 3TEB series has outstanding high IOPS, better data integrity and extended lifespan through reducing the bad block number happening.

For real industrial application, 3TEB series has built-in thermal sensor to monitor the environment temperature. iData Guard, the power loss management mechanism developed by Innodisk, ensures data integrity while power sudden loss happened.

CAUTION *TRIM must be enabled.*

TRIM enables SSD's controller to skip invalid data instead of moving. It can free up significant amount of resources, extends the lifespan of SSD by reducing erase, and write cycles on the SSD. Innodisk's handling of garbage collection along with TRIM command improves write performance on SSDs.

1.2 Product View and Models

Innodisk M.2 (S42) 3TEB is available in follow capacities within 3D TLC flash ICs.

M.2 (S42) 3TEB 128GB

M.2 (S42) 3TEB 256GB

M.2 (S42) 3TEB 512GB

M.2 (S42) 3TEB 1TB

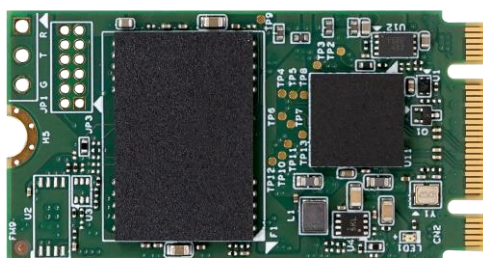


Figure 1: Innodisk M.2 (S42) 3TEB (type 2242)

1.3 SATA Interface

Innodisk M.2 (S42) 3TEB supports SATA III interface, and compliant with SATA I and SATA II. SATA III interface can work with Serial Attached SCSI (SAS) host system, which is used in server

computer. Innodisk M.2 (S42) 3TEB is compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps /3.0Gbps/6.0Gbps data rate).

2. Product Specifications

2.1 Capacity and Device Parameters

M.2 (S42) 3TEB device parameters are shown in Table 1.

Table 1: Device parameters

Capacity	Cylinders	Heads	Sectors	LBA	User Capacity(MB)
128GB	16383	16	63	234441648	114473
256GB	16383	16	63	468862128	228936
512GB	16383	16	63	937703088	457862
1TB	16383	16	63	1875385008	915715

Note: User capacity is different because of the Die RAID function.

2.2 Performance

Burst Transfer Rate: 6.0Gbps

Table 2: Performance – 112 Layers 3D TLC*

Capacity	Unit	128GB	256GB	512GB	1TB
Sequential** Read (Q32T1.)	MB/s	550	550	560	550
Sequential** Write (Q32T1.)		480	500	510	500
Sustained Sequential Read (Avg.)***		430	490	500	500
Sustained Sequential Write (Avg.)***		240	300	300	370
4KB Random** Read (QD32)	IOPS	37,000	71,000	73,000	73,000
4KB Random** Write (QD32)		67,000	76,000	69,000	76,000

Note: * Performance results are tested in Room Temperature with Out-of-Box devices and may vary depending on overall system setup. In addition, 3TEB series adopt hybrid mode which enables SLC Cache followed by TLC direct write to strike balance between burst performance and steady overall stability.

Note: ** Performance results are based on CrystalDiskMark 8.0.1 with file size 1000MB.

Note: *** Performance results are based on AIDA 64 v5.98 with block size 1MB of Linear Write Test Item

2.3 Electrical Specifications

2.3.1 Power Requirement

Table 3: Innodisk M.2 (S42) 3TEB Power Requirement

Item	Symbol	Rating	Unit
Input voltage	V _{IN}	+3.3 DC +- 5%	V

2.3.2 Power Consumption

Table 4: Typical Power Consumption

Mode	Power consumption (W)
Read	1.1
Write	1.2
Idle	0.3
Power-on peak	3.3

Target: M.2 (S42) 3TEB 1TB

2.4 Environmental Specifications

2.4.1 Temperature Ranges

Table 5: Temperature range for M.2 (S42) 3TEB

Temperature	Range
Operating	Standard Grade: 0°C to +70°C
Storage	-40°C to +85°C

2.4.2 Humidity

Relative Humidity: 10-95%, non-condensing

2.4.3 Shock and Vibration

Table 6: Shock/Vibration Testing for M.2 (S42) 3TEB

Reliability	Test Conditions	Reference Standards
Vibration	7 Hz to 2K Hz, 20G, 3 axes	IEC 60068-2-6
Mechanical Shock	Duration: 0.5ms, 1500 G, 3 axes	IEC 60068-2-27

2.4.4 Mean Time between Failures (MTBF)

The following table summarizes the MTBF prediction results for various M.2 (S42) 3TEB configurations. The analysis was performed using a RAM Commander™ failure rate prediction.

- **Failure Rate:** The total number of failures within an item population, divided by the total

number of life units expended by that population, during a particular measurement interval under stated condition.

- **Mean Time between Failures (MTBF):** A basic measure of reliability for repairable items: The mean number of life units during which all parts of the item perform within their specified limits, during a particular measurement interval under stated conditions.
-

Table 7: M.2 (S42) 3TEB MTBF

Product	Condition	MTBF (Hours)
Innodisk M.2 (S42) 3TEB	Telcordia SR-332 GB, 25°C	>3,000,000

2.5 CE and FCC Compatibility

M.2 (S42) 3TEB conforms to CE and FCC requirements.

Reliability	Reference standards
Electrostatic Discharge (ESD)	EC 61000-4-2 ESD

2.6 RoHS Compliance

M.2 (S42) 3TEB is fully compliant with RoHS directive.

2.7 Reliability

Table 8: M.2 (S42) 3TEB TBW

Parameter	Value	
Flash endurance	3,000 P/E cycles	
Error Correct Code	Support	
Data Retention	Under 40 C: 10 Years at Initial NAND Status; 1 Year at NAND Life End	
TBW* (Total Bytes Written) Unit: TB		
Capacity	Sequential workload	Client workload
128GB	341	150
256GB	682	300
512GB	1364	600
1TB	2727	1200
* Note:		
1. Sequential: Mainly sequential write are estimated by PassMark Burnin Test v8.1 pro.		
2. Client: Follow JESD218 Test method and JESD219A Workload, tested by ULINK.		
3. Based on out-of-box performance.		

2.8 Transfer Mode

M.2 (S42) 3TEB support following transfer mode:

Serial ATA III 6.0Gbps

Serial ATA II 3.0Gbps

Serial ATA I 1.5Gbps

2.9 Pin Assignment

Innodisk M.2 (S42) 3TEB uses a standard SATA pin-out. See following table for M.2 (S42) 3TEB pin assignment.

Table 9: Innodisk M.2 (S42) 3TEB Pin Assignment

Signal Name	Pin #	Pin #	Signal Name
		75	GND
3.3V	74	73	GND
3.3V	72	71	GND
3.3V	70	69	GND
NC	68	67	NC
Notch	66	65	Notch
Notch	64	63	Notch
Notch	62	61	Notch
Notch	60	59	Notch
NC	58		
NC	56	57	GND
NC	54	55	NC
NC	52	53	NC
NC	50	51	GND
NC	48	49	RX+
NC	46	47	RX-
NC	44	45	GND
NC	42	43	TX-
NC	40	41	TX+
DEVSLP	38	39	GND
NC	36	37	NC
NC	34	35	NC
NC	32	33	GND
NC	30	31	NC
NC	28	29	NC
NC	26	27	GND
NC	24	25	NC
NC	22	23	NC
NC	20	21	GND
Notch	18	19	Notch
Notch	16	17	Notch
Notch	14	15	Notch
Notch	12	13	Notch

DAS/DSS	10	11	NC
NC	8	9	NC
NC	6	7	NC
3.3V	4	5	NC
3.3V	2	3	GND
		1	GND

2.10 Mechanical Dimensions

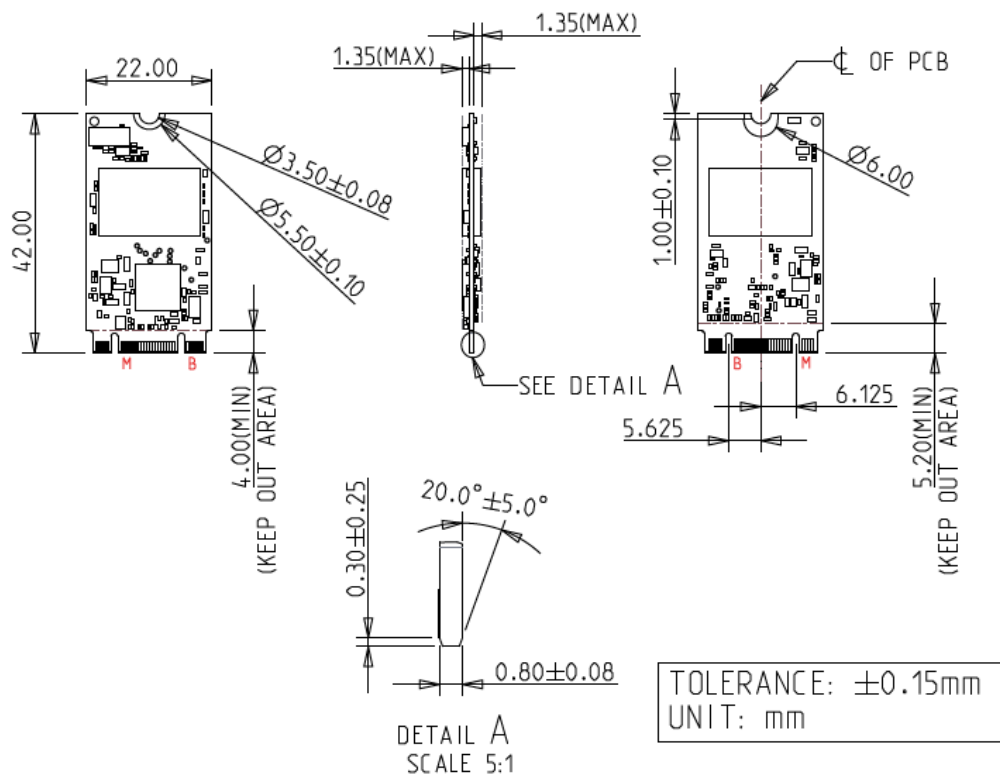


Figure 2: Innodisk M.2 (S42) 3TEB diagram

2.11 Assembly Weight

An Innodisk M.2 (S42) 3TEB within flash ICs, 1TB's weight is 8 grams approximately.

2.12 Seek Time

Innodisk M.2 (S42) 3TEB is not a magnetic rotating design. There is no seek or rotational latency required.

2.13 Hot Plug

The SSD support hot plug function and can be removed or plugged-in during operation. User has to avoid hot plugging the SSD which is configured as boot device and installed operation system.

Surprise hot plug : The insertion of a SATA device into a backplane (combine signal and power) that has power present. The device powers up and initiates an OOB sequence.

Surprise hot removal: The removal of a SATA device from a powered backplane, without first being placed in a quiescent state.

2.14 NAND Flash Memory

Innodisk M.2 (S42) 3TEB uses 3D TLC NAND flash memory, which is non-volatility, high reliability and high speed memory storage.

3. Theory of Operation

3.1 Overview

Figure 3 shows the operation of Innodisk M.2 (S42) 3TEB from the system level, including the major hardware blocks.

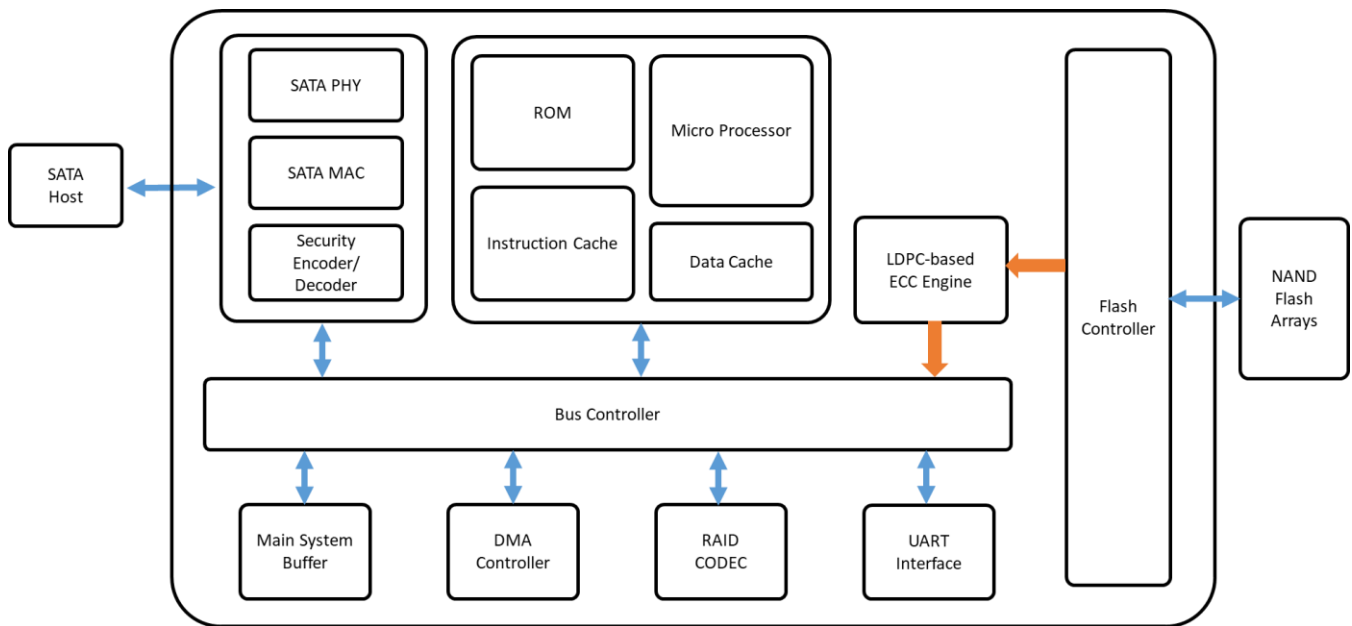


Figure 3: Innodisk M.2 (S42) 3TEB Block Diagram

Innodisk M.2 (S42) 3TEB integrates a SATA III controller and NAND flash memories. Communication with the host occurs through the host interface, using the standard ATA protocol. Communication with the flash device(s) occurs through the flash interface.

3.2 SATA III Controller

Innodisk M.2 (S42) 3TEB is designed with SATA III 6.0Gbps (Gen. 3) Controller, a SATA III 6.0Gbps (Gen. 3) controller. The Serial ATA physical, link and transport layers are compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps/3.0Gbps/6.0Gbps data rate). The controller has 2 channels for flash interface.

3.3 Error Detection and Correction

Innodisk M.2 (S42) 3TEB is designed with hardware LDPC ECC engine with hard-decision and soft-decision decoding. Low-density parity-check (LDPC) codes have excellent error correcting performance close to the Shannon limit when decoded with the belief-propagation (BP) algorithm using soft-decision information.

3.4 Wear-Leveling

Flash memory can be erased within a limited number of times. This number is called the **erase cycle limit** or **write endurance limit** and is defined by the flash array vendor. The erase cycle limit applies to each individual erase block in the flash device.

Innodisk M.2 (S42) 3TEB uses a static wear-leveling algorithm to ensure that consecutive writes of a specific sector are not written physically to the same page/block in the flash. This spreads flash media usage evenly across all pages, thereby extending flash lifetime.

3.5 Bad Blocks Management

Bad Blocks are blocks that contain one or more invalid bits whose reliability are not guaranteed. The Bad Blocks may be presented while the SSD is shipped, or may develop during the life time of the SSD. When the Bad Blocks is detected, it will be flagged, and not be used anymore. The SSD implement Bad Blocks management, Bad Blocks replacement, Error Correct Code to avoid data error occurred. The functions will be enabled automatically to transfer data from Bad Blocks to spare blocks, and correct error bit.

3.6 iData Guard

iData Guard is a comprehensive data protection mechanism that functions before and after a sudden power outage to SSD. Low-power detection terminates data writing before an abnormal power-off, while table-remapping after power-on deletes corrupt data and maintains data integrity. iData Guard provides effective power cycling management, preventing data stored in flash from degrading with use.

3.7 Garbage Collection

Garbage collection is used to maintain data consistency and perform continual data cleansing on SSDs. It runs as a background process, freeing up valuable controller resources while sorting good data into available blocks, and deleting bad blocks. It also significantly reduces write operations to the drive, thereby increasing the SSD's speed and lifespan.

3.8 Trim

The Trim command is designed to enable the operating system to notify the SSD which pages no longer contain valid data due to erases either by the user or operating system itself. During a delete operation, the OS will mark the sectors as free for new data and send a Trim command to the SSD to mark them as not containing valid data. After that the SSD knows not to preserve the contents of the block when writing a page, resulting in less write amplification with fewer writes to the flash, higher write speed, and increased drive life.

3.9 iPower Guard

iPower Guard technology is a set of preventive measures that protect the SSD in an unstable power supply environment. This comprehensive package comprises safeguards for startup and

shutdown to maintain device performance and ensure data integrity.

3.10 Thermal Throttling

Thermal throttling is a protective mechanism designed to safeguard components from potential damage caused by excessive temperatures. When an SSD approaches a critical temperature threshold, Innodisk firmware activates the thermal throttling mechanism to regulate the SSD's temperature. Thermal throttling is crucial for SSDs since it prevents drive damage, which could otherwise result in data loss. However, it's worth noting that when thermal throttling is activated, read and write tasks may experience a reduction in speed.

4. Installation Requirements

4.1 M.2 (S42) 3TEB Pin Directions

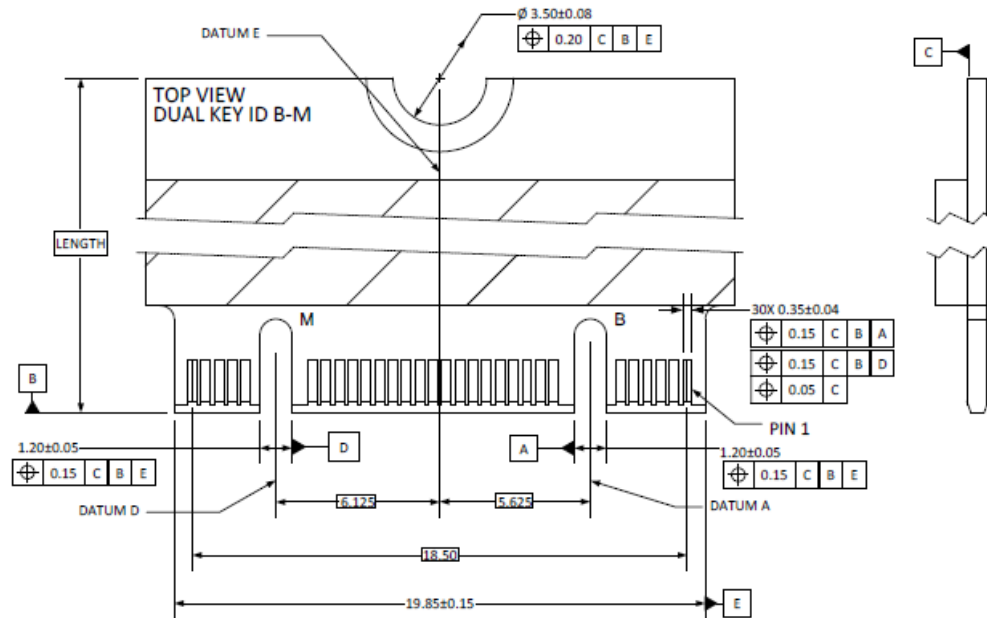


Figure 4: Signal Segment and Power Segment

4.2 Electrical Connections for M.2 (S42) 3TEB

A Serial ATA device may be either directly connected to a host or connected to a host through a cable. For connection via cable, the cable should be no longer than 1meter. The SATA interface has a separate connector for the power supply. Please refer to the pin description for further details.

4.3 Device Drive

No additional device drives are required. The Innodisk M.2 (S42) 3TEB can be configured as a boot device.

5. SMART Feature Set

Innodisk 3TEB series support the SMART command set and defines some vendor-specific data to report SMART attributes of SSD.

Table 10: SMART command

Value	Command	Value	Command
D0h	Read Data	D5h	Read Log
D1h	Read Attribute Threshold	D6h	Return Status
D2h	Enable/Disable Auto save	D8h	Enable SMART Operations
D3h	Save Attribute Values	D9h	Disable SMART Operations
D4h	Execute OFF-LINE Immediate	DAh	Return Status

5.1 SMART Attributes

Innodisk 3TEB series SMART data attributes are listed in following table.

Table 11: SMART attribute

Attribute ID (hex)	Value	Raw Attribute Value						Rsv	Attribute Name
01	X								Read Error Rate
05	X	LSB	MSB	00	00	00	00	00	Later Bad
09	LSB	LSB	MSB	00	00	00	00	00	Power-On hours Count
0C	LSB	LSB	MSB	00	00	00	00	00	Drive Power Cycle Count
A3	X	LSB			MSB	00	00	00	Total Bad Block Count
A5	LSB	LSB			MSB	00	00	00	Max Erase count
A7	LSB	LSB			MSB	00	00	00	Avg Erase count
A9	LSB	LSB	00	00	00	00	00	00	Device Life
AA	X	LSB	MSB	00	00	00	00	00	Spare Block Count
AB	LSB	LSB	MSB	00	00	00	00	00	Program fail count
AC	LSB	LSB	MSB	00	00	00	00	00	Erase fail count
C0	LSB	LSB	MSB	00	00	00	00	00	Unexpected Power Loss Count

C2	LSB			MIN		MAX	00	00	Temperature
E5		ID 0	ID 1	ID 2	ID 3	ID 4	ID 5		Flash ID
EB			MSB	LSB	MSB	LSB	MSB	LSB	Later bad block info (Read/Write/Erase)
F1	00	LSB			MSB	00	00	00	Total LBA written(LBA=32MB)
F2	00	LSB			MSB	00	00	00	Total LBA read(LBA=32MB)

6. Part Number Rule

CODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
	D	E	M	2	4	-	0	1	T	I	C	1	K	C	A	D	L	-	X	X	X
Definition																					
Code 1 st (Disk)											Code 14 th (Operation Temperature)										
D : Disk											C: Standard Grade (0°C~ +70°C)										
Code 2 nd (Feature set)																					
E : Embedded series																					
Code 3 rd ~5 th (Form factor)											Code 15 th (Internal control)										
M24: M.2 Type 2242-D2-B-M											A: BGA PCB version										
Code 7 th ~9 th (Capacity)											Code 16 th (Channel of data transfer)										
A28: 128GB				B56: 256GB							D: Dual Channels										
C12: 512GB				01T: 1TB																	
Code 10 th ~12 th (Controller)											Code 17 th (Flash Type)										
IC1: SATA 3TEB											L: Innodisk 3D TLC										
Code 13 th (Flash mode)											Code 19 th ~21 st (Customize code)										
K: 112 layers 3D TLC																					