

J24

3U Active Air Cooler

PRODUCT SPECIFICATIONS

Speficiation Version: 04/08/2025

(Specifications are subject to change without notice)

Model Number: J24


- Recommend for AMD® CPU as following
 - AMD® Processor Family, Socket SP7
- Active Air Cooler for 3U Server and Up

Overall Specification

Dimension	120.0 x 103.6 x 110.0 mm
Weight	1080g
Material	Aluminum Fin + Heat pipes + Copper Heat Spreader Embedded Aluminum Heatsink Base
Thermal Grease	Shin-Etsu 8195-4 or Equivalent Pre-Printed
TDP	Up to 600 Watts

Cooling Fan Specification



Model Number	DF128038BX-E
Dimension	80 x 80 x 38 mm
Bearing	Double Ball
Rated Voltage	DC 12V
Rated Speed	At Duty Cycle 0~20%: 2400± 200 RPM At Duty Cycle 50%: 4800± 10% RPM At Duty Cycle 100%: 8000±10% RPM
Input Power	At Duty Cycle 0~20%: 1.2 W At Duty Cycle 50%: 5.52 W At Duty Cycle 100%: 24.72 W
Maximum Airflow	At Duty Cycle 0~20%: 32.52 CFM At Duty Cycle 50%: 67.24 CFM At Duty Cycle 100%: 115.61 CFM
Rated Static Pressure	At Duty Cycle 0~20%: 3.45 mm-H2O At Duty Cycle 50%: 13.6 mm-H2O At Duty Cycle 100%: 38.3 mm-H2O
Acoustical Noise	At Duty Cycle 0~20%: 25.63 dBA At Duty Cycle 50%: 47.85 dBA At Duty Cycle 100%: 64.40 dBA
Lead Wire Pin Out	Pin#1- Black(-) Pin#2- Yellow(+) Pin#3- Green(Tachometer/ Signal Output) Pin#4- Blue (PWM)

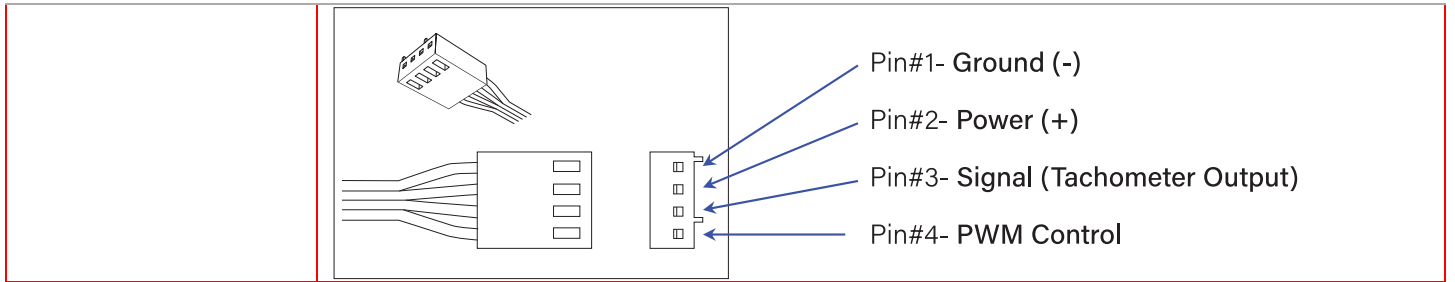J24 | Socket SP7


CONFIDENTIAL DOCUMENT

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO DYNATRON CORPORATION AND DYNAEON INDUSTRIAL CO., LTD.
ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DRAWING IS EXPRESSLY PROHIBITED EXCEPT AS DYNATRON
CORPORATION AND DYNAEON INDUSTRIAL CO., LTD. MAY OTHERWISE AGREE TO IN WRITING.

REV#	DESCRIPTION	CHECKER	DATE
0.0	INITIAL RELEASE	MichaelF	04/08/25

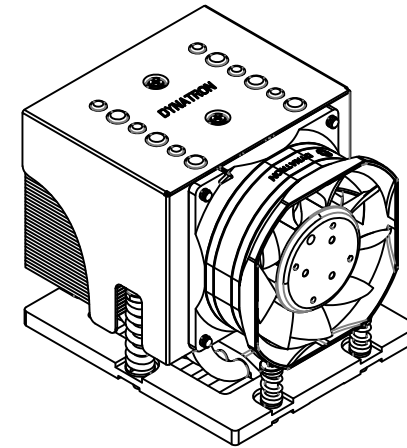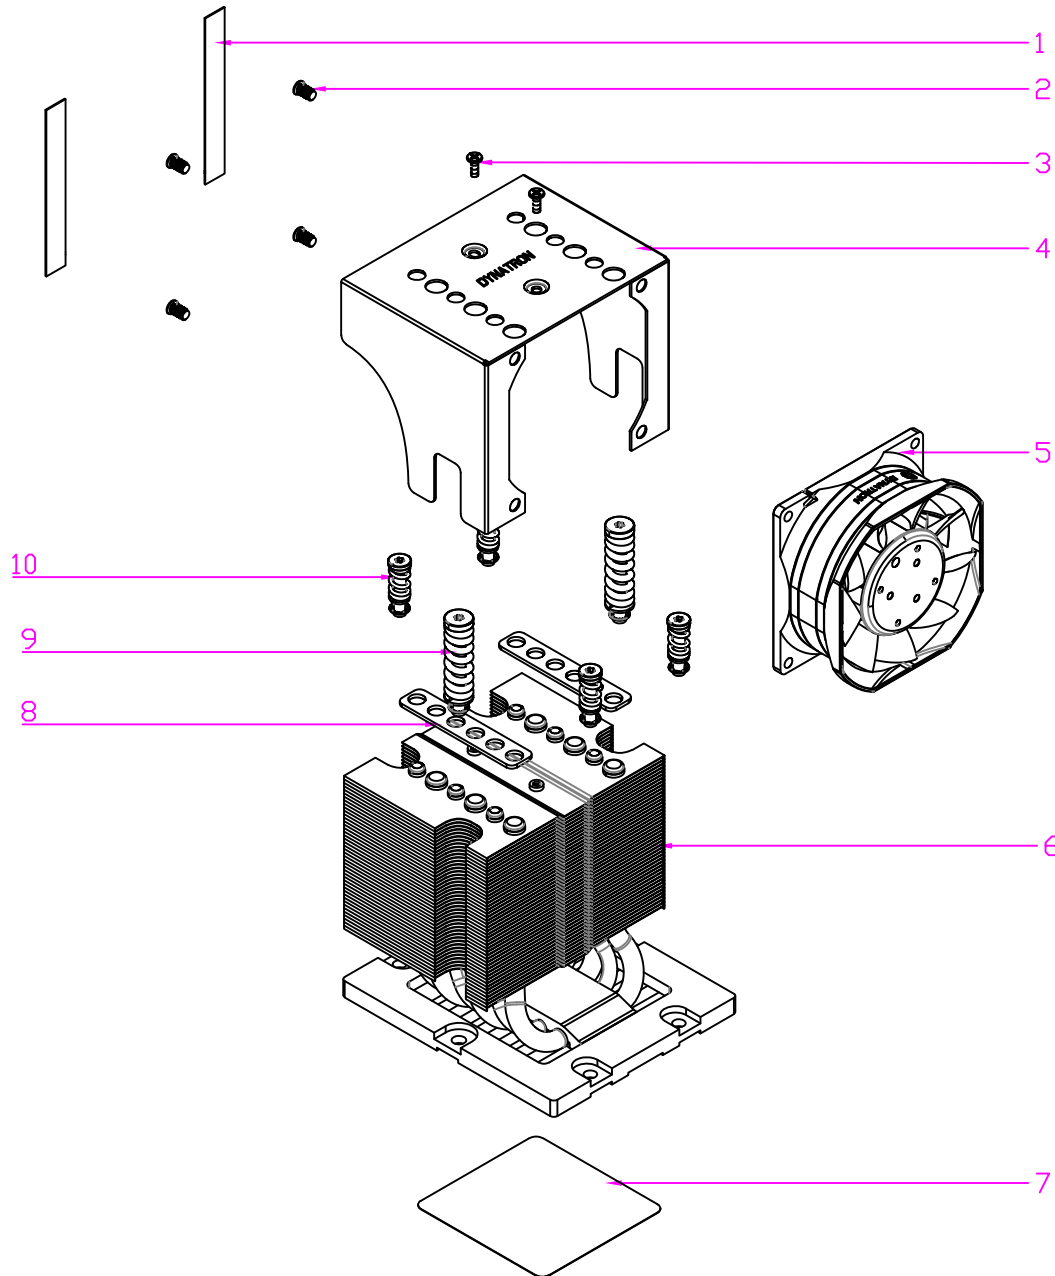


10	INSTALLATION SCREW KIT (CORNER)	STEEL	4
9	INSTALLATION SCREW KIT (CENTER)	STEEL	2
8	FAN RETENTION BRACKET GASKET PAD	FOAM	2
7	THERMAL GREASE	SHIN-ETSU 8195-4 or EQUIVALENT	N/A
6	HEATSINK	COPPER + AL BASE, HEAT PIPE, AL FINS	1
5	FAN DF12B038BX-E, 8000RPM	PLASTIC	1
4	FAN RETENTION BRACKET	SPCC	1
3	FAN RETENTION BRACKET SCREW	STEEL	2
2	FAN SCREW	STEEL	4
1	GASKET PAD, HEATSINK	FOAM	2
ITEM #	DESCRIPTION	MATERIAL	QTY.


	DATE	NAME	 DYNATRON CORPORATION	
DRAWN	04/08/25	MichaelF	TITLE: 3U Air Cooler J24 BOM & Exploded Assembly Drawing	
CHECKED	04/08/25	MichaelF		
ENG. APPR.				
MFG. APPR.				
QA			DWG. No: DYN-EP-J24	
COMMENTS				REV 0.0

NOTES:

1. THE FIGURE IS FOR REFERENCE ONLY, AND NOT FOR SCALE

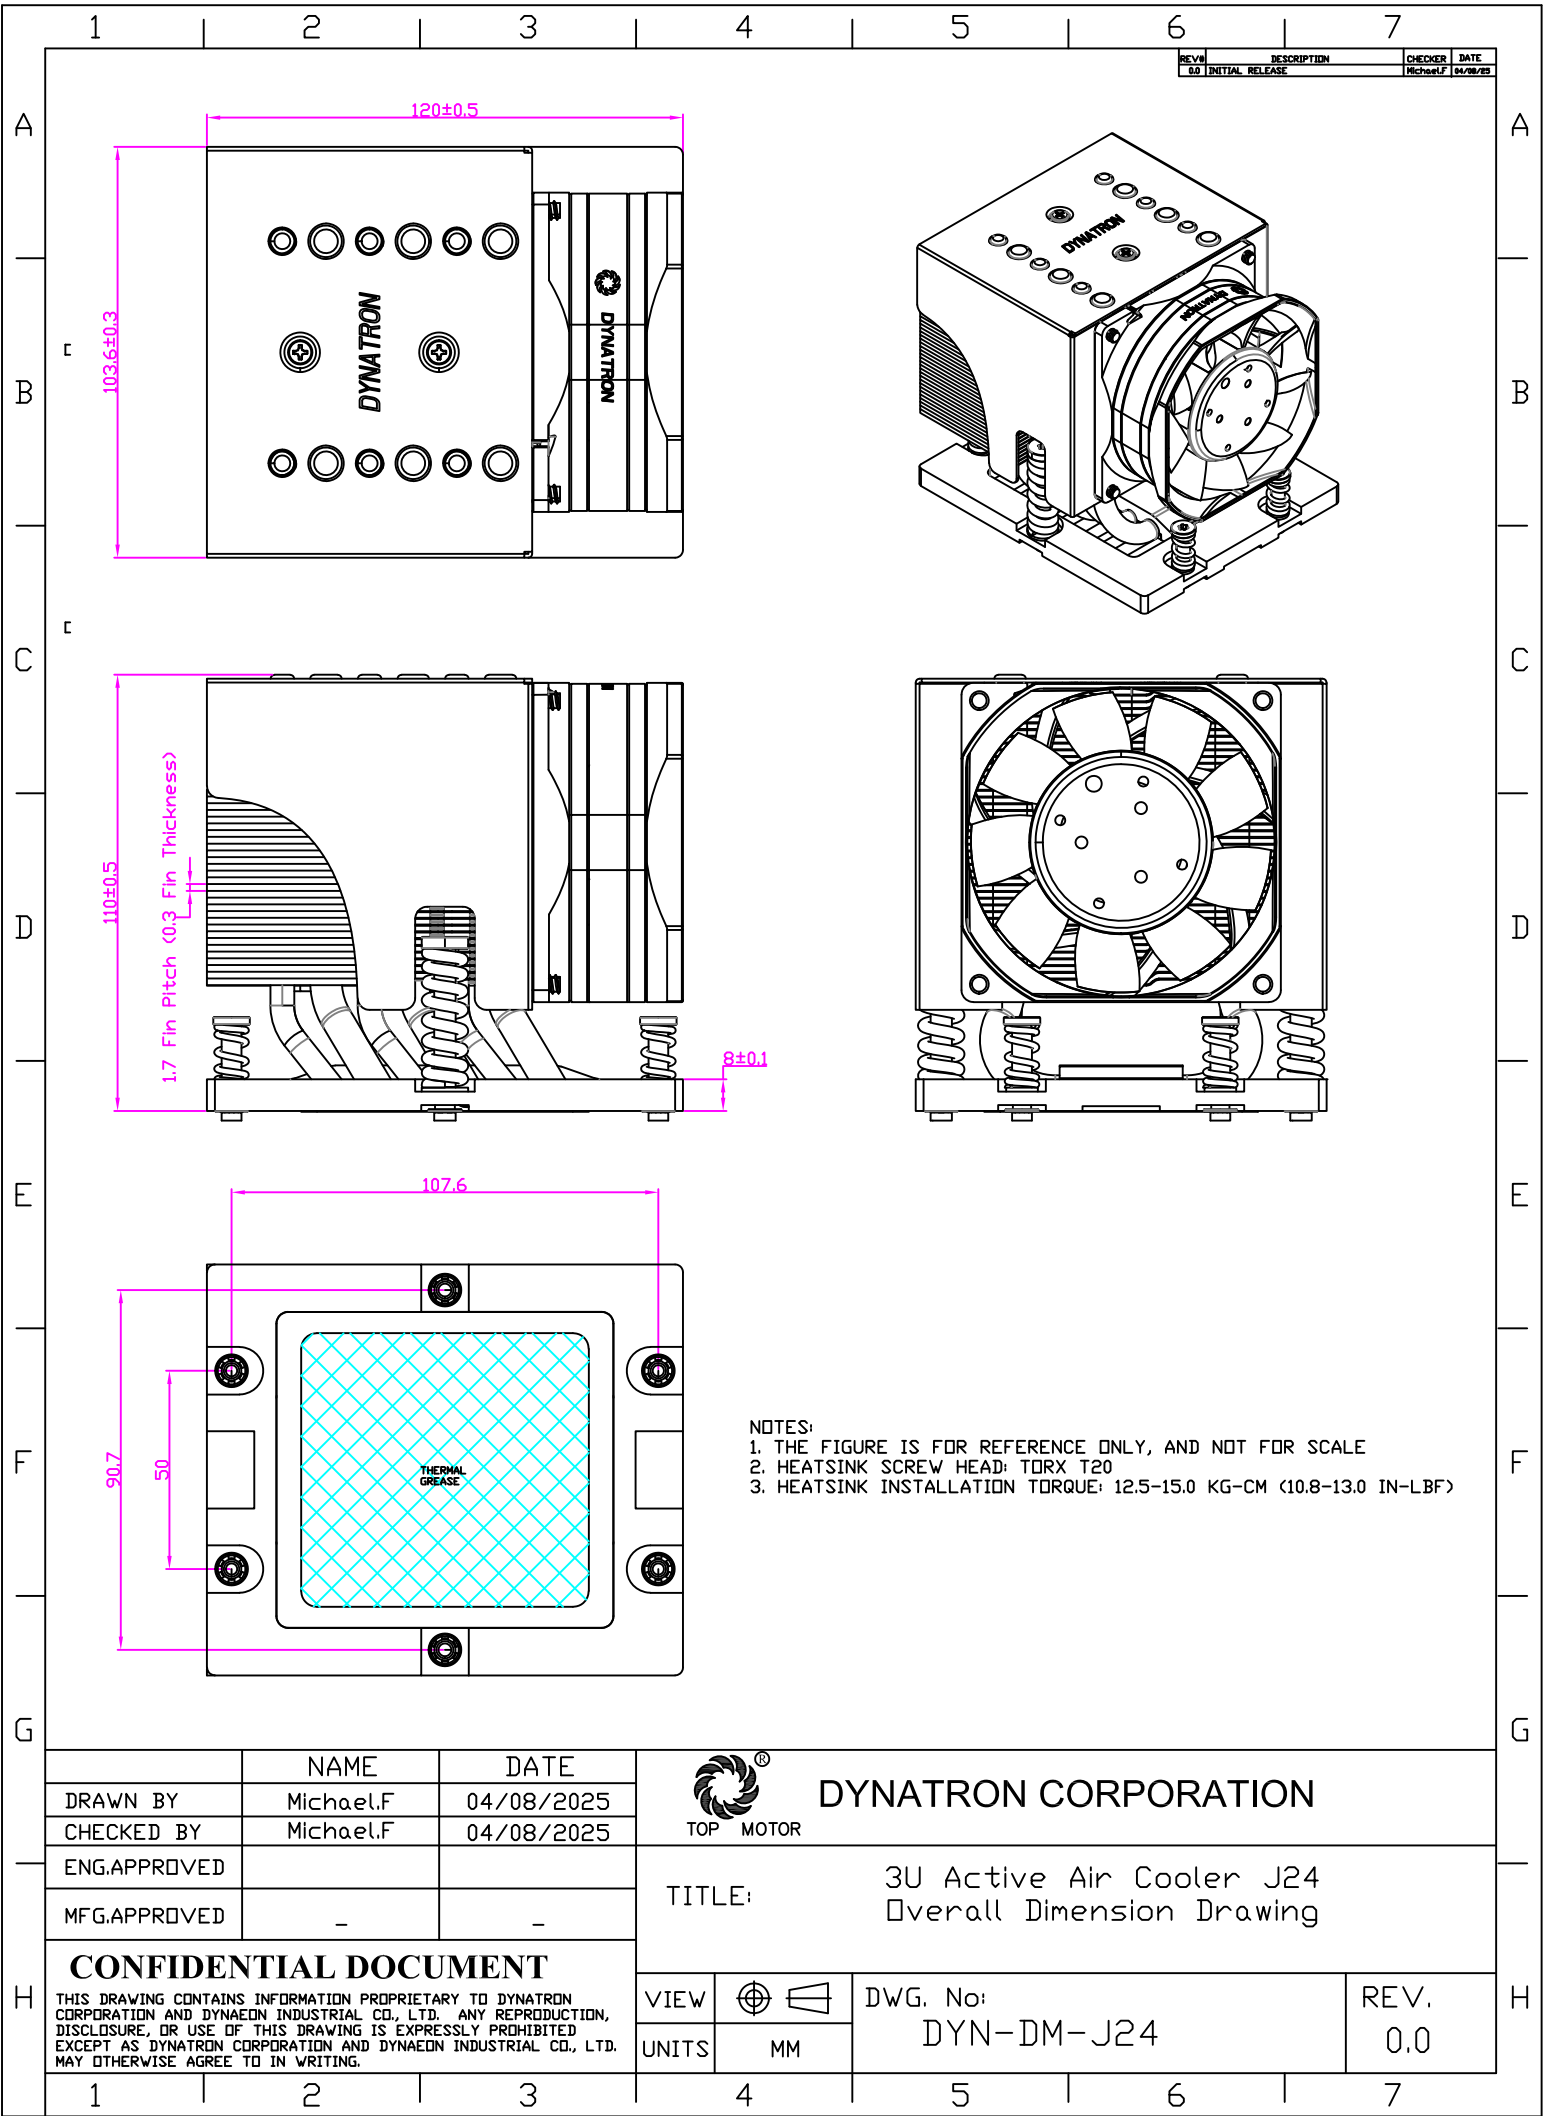

Recommended Torque Application Pattern for Socket SP7 Coolers

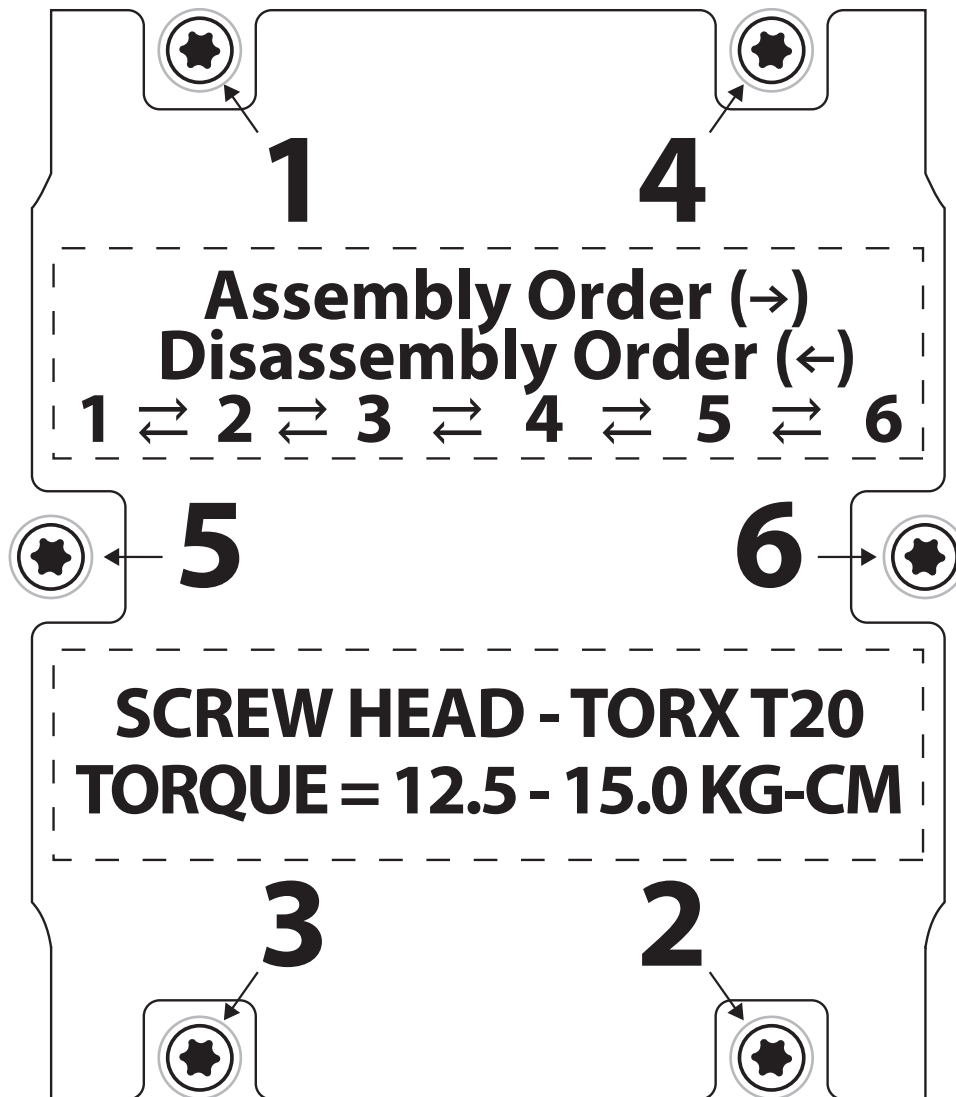

WARNING: Failure to attach thermal solutions one-at-a-time in the sequence 1-2-3-4-5-6 and failure to remove thermal solutions one at a time in the sequence 6-5-4-3-2-1 can lead to permanent socket damage.

Publication History:

04/08/2025: Initial Release

(Specifications are subject to change without notice)