

# W07IM3A-67O1-P

7" ARM A53 G-WIN Full IP67 P-CAP Panel PC



## KEY FEATURES

- ARM A53 Quad Core 2.0GHz
- High Quality 7" Panel, 1024 x 600 resolution, 1000 nits
- P-cap multi touch screen Optical Bonding with Panel to increase the clarity and transparency
- Optional Anti-Reflective Protection Glass Optical Bonding with Panel
- Dust/ Water proof design with VESA mount Full IP67 Panel PC
- Plastic Front Bezel with Anti-Corrosion Aluminum Die-Casting back cover
- 10 to 55°C wide operating temperature
- Wide Range 9 to 36V DC Input. Optional for Ignition On/Off delay

## INTRODUCTION

Winmate G-WIN IP67 Panel PC Series is designed to excel in demanding environments, offering a versatile range of display sizes from 7" to 21.5" and supporting both Windows and Android operating systems. Engineered for durability and performance, these Panel PCs feature advanced PCAP touch technology, optical bonding for enhanced visibility, and rugged aluminum housing. With a full IP67 rating for complete protection against water and dust, they are ideal for industrial and outdoor applications. The series also supports VESA mount solutions for flexible installation and offers optional high-brightness displays for optimal readability in bright conditions.

## SPECIFICATIONS

### System Specification

<b>Processor</b>	ARM A53 (Quad Core 2.0GHz)	<b>Memory</b>	4GB LPDDR4
<b>Storage</b>	eMMC: Onboard 32 GB	<b>Operating System</b>	Android 11 (Upgradeable to Android 13) Linux Yocto 5.10.104 with QT 5.15 (Optional) Linux Ubuntu Server 22.04 (Optional)
<b>WLAN</b>	Support (Optional)	<b>BT</b>	Support (Optional)

### Display

<b>Resolution</b>	1024x600	<b>Size</b>	7.0 inches
<b>Contrast Ratio</b>	700:1	<b>Panel Brightness</b>	1000.0 nits
<b>View Angles</b>	75,75,75,70	<b>Type</b>	Projected Capacitive Multi Touch Screen Bonding With Panel Ture Flat Protection Glass Bonding With Panel (Optional)

### Mechanical

<b>Dimension</b>	189.4 x 145.4 x 49.8 mm	<b>Weight</b>	1.2 kg
<b>Mounting</b>	VESA mount	<b>Enclosure</b>	Plastic Front Bezel with Aluminum back cover Pre finish: Surtec 650, Type II, Class 3 Coating: Polyester powder coating
<b>Cooling System</b>	Fanless Design		

## Environment

Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	-10°C to 55°C
Storage Temperature	-30°C to 70°C	Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I	IP rating	IP67

## Certification

Certification	CE, FCC
---------------	---------

## IO Ports

Power Input	1 x M12 waterproof connector for 9~36V DC	USB Port	1 x M12 waterproof connector for 2 x USB2.0
Serial Port	1 x M12 waterproof connector for RS232	LAN	1 x waterproof Giga LAN RJ45 connector
Indicator	1 x LED Indicator for power 1 x LED Indicator for storage		


## Control

Button	1 x Power Button F1 key to increase screen brightness. F2 key to decrease screen brightness. F3 key to bring up the Winset Utility.
--------	--

## Accessory

Accessory	External open wire Power cable with waterproof connector External USB cable with waterproof connector External COM cable with waterproof connector External LAN cable with waterproof connector Waterproof caps RJ45 female-female converter USB Type A converter VESA screws	Optional Accessory	100~240V AC to DC 120W Adapter with power cord (Optional)
-----------	--	--------------------	---

## DIMENSIONS UNIT:MM

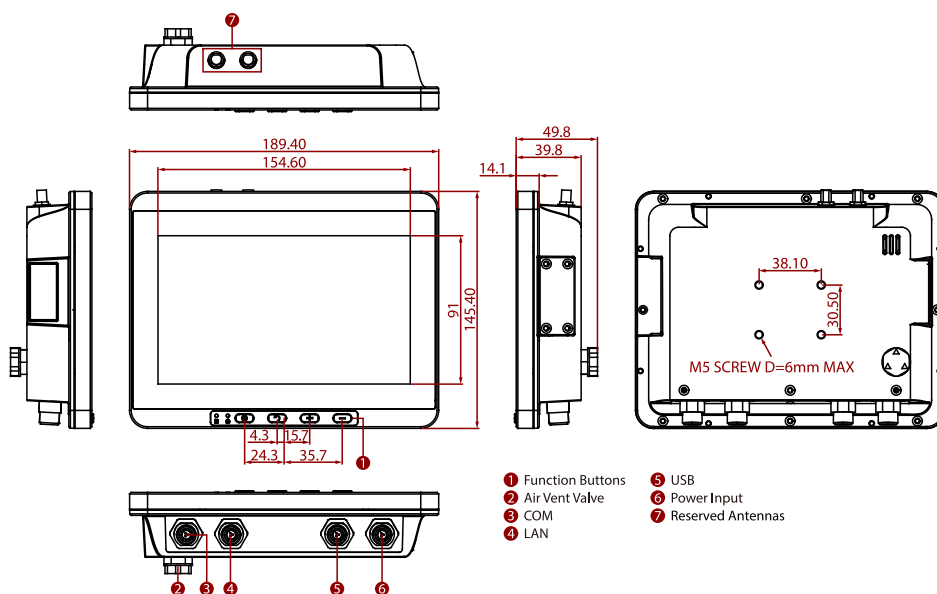

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
3. Weight of the device varies by configuration.
4. Please contact our sales representative if you need further product information.
5. All specifications are subject to change without prior notice.
6. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.