

HPS-GNRD4A

Dual Intel® Xeon® 6 Processors, 1300W, 5 x RJ-45,
IPMI2.0 Workstation

Quick Reference Guide

1st Ed –25 August 2025

Copyright Notice

Copyright © 2025 Avalue Technology Inc., ALL RIGHTS RESERVED.

Document Amendment History

Revision	Date	By	Comment
1 st	August 2025	Avalue	Initial Release

Declaration of Conformity



This device complies with part 15 fcc rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a class "a" digital device, pursuant to part 15 of the fcc rules.

These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications.

Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

CE statement

The product(s) described in this manual complies with all application European Union (CE) directives if it has a CE marking. For computer systems to remain CE compliant, only CE-compliant parts may be used. Maintaining CE compliance also requires proper cable and cabling techniques.

Notice

This guide is designed for experienced users to setup the system within the shortest time. For detailed information, please always refer to the electronic user's manual.

Copyright Notice

© 2025 by Avalue Technology Inc. All rights are reserved. No parts of this manual may be copied, modified, or reproduced in any form or by any means for commercial use without the prior written permission of Avalue Technology Inc. All information and specification provided in this manual are for reference only and remain subject to change without prior notice.

Acknowledgements

Intel and Pentium are trademarks of Intel Corporation.

Microsoft Windows is registered trademark of Microsoft Corp.

All other product names or trademarks are properties of their respective owners.

Disclaimer

This manual is intended to be used as a practical and informative guide only and is subject to change without notice. It does not represent a commitment on the part of Avalue. This

product might include unintentional technical or typographical errors. Changes are periodically made to the information herein to correct such errors, and these changes are incorporated into new editions of the publication.

A Message to the Customer

Avalue Customer Services

Each and every Avalue's product is built to the most exacting specifications to ensure reliable performance in the harsh and demanding conditions typical of industrial environments. Whether your new Avalue device is destined for the laboratory or the factory floor, you can be assured that your product will provide the reliability and ease of operation for which the name Avalue has come to be known.

Your satisfaction is our primary concern. Here is a guide to Avalue's customer services. To ensure you get the full benefit of our services, please follow the instructions below carefully.

Technical Support and Assistance

1. Visit the Avalue website at <https://www.avalue.com/> where you can find the latest information about the product.
2. Contact your distributor or our technical support team or sales representative for technical support if you need additional assistance. Please have following information ready before you call:
 - Product name and serial number
 - Description of your peripheral attachments
 - Description of your software (operating system, version, application software, etc.)
 - A complete description of the problem
 - The exact wording of any error messages

To receive the latest version of the user's manual; please visit our Web site at:

www.avalue.com

Product Warranty (Returns & Warranties policy)

1. Purpose

Avalue establishes the following maintenance specifications and operation procedures for providing the best quality of service and shortened repair time to our customers.

2. Warranty

2.1 Warranty Period

Avalue endeavors to offer customers the most comprehensive post-sales services and protection; besides offering a 2-year warranty for standard Avalue products, an extended warranty service can also be provided based on additional request from the customer. Within the warranty period, customers are entitled to receive comprehensive and prompt repair and warranty.

Standard products manufactured by Avalue are offered a 2-year warranty, from the date of delivery from Avalue. For ODM/OEM products manufactured by Avalue or PCBA with conformal coating, will follow up the define warranty of the agreement, otherwise will be offered 1-year warranty for ODM/OEM products but non-warranty for PCBA with conformal coating. For outsourcing parts kit by Avalue (ex: Motherboard, LCD touch panel, CPU, RAM, HDD) are offered a 6-month warranty, and Mobile/Tablet PC battery are offered a warranty of the half year, from the date of delivery by Avalue. Products before the mass production stage, i.e. engineering samples are not applied in this warranty or service policy. For extended warranty and cross-territory services, product defects resulting from design, production process or material are covered by the pre-set warranty period after the date of delivery from Avalue. For non-Avalue products, the product warranty and repair time shall be based on the service standards provided by the original manufacturer; in principle Avalue will provide these products a warranty service for no more than one year.

2.2 Maintenance services within the warranty period

In the case of Avalue product DOA (Defect-on-Arrival) when the customer finds any defect within 1 month after the delivery, Avalue will replace it with a new product in a soonest way. Except for custom products, once the customer is approved of a Cross-Shipment Agreement, which allows for delivery a new product to the customer before receiving the defective one, Avalue will immediately proceed with new product replacement for the said DOA case. On validation of the confirmed defect, Avalue is entitled to reserve the right whether to provide a new product for replacement. For the returned defective new product, it is necessary to verify that there shall be no bruise, alteration, scratch or marking to the appearance, and that none of the delivered accessories missing; otherwise, the customer will be requested to pay a processing fee. On the other hand, if the new product defect is resulting from incorrect configuration or erroneous use by the user instead of any problem of the hardware itself, the customer will also be requested to pay for relevant handling fees.

As for other conditions, Avalue will handle defects by way of repair. The customer will be requested to send the defective product to an Avalue authorized service center, and Avalue will return the repaired product back to the customer as soon as possible.

2.3 Ruling of an out-of-warranty defect

The following situations are not included in the warranty:

- The warranty period has expired.
- Product has been altered or its label of the serial number has been torn off.
- Product functionality issues resulting from improper use by the user, unauthorized dismantle or alteration, unfit operation environment, improper maintenance, accident or other causes. Avalue reserves the right for the ruling of the aforementioned situations.
- Product damage resulting from lightning, flood, earthquake or other calamities.
- The warranty rules of non-Avalue products and accessories shall be in accordance with standards set up by the original manufacturer. These products and accessories include RAM, HDD, FDD, CD-ROM, CPU, FAN, etc.
- Product upgrade request or test request submitted by the customer after expiration of the warranty.
- PCBA with conformal coating.
- Avalue semi-product and outsourced products without Avalue serial number.
- Products before the mass production stage, i.e. engineering samples.

3. Procedure for sending for repair

3.1 Attain a RMA number

A customer's rejected product returned for repair shall have a RMA (Return Merchandise Authorization) number. Without a RMA number, Avalue will not provide any repair service for the rejected product, and the product will be returned to the customer at customer's cost. Avalue will not issue any notice for the return of the product.

Each returned product for repair shall have a RMA number, which is simply the authorization of the return for repair; it is not a guarantee that the returned goods can be repaired or replaced. For applying for a RMA number, the customer may enter the eRMA webpage of Avalue <https://www.avalue.com/en/member> and log-in with an account number and a password authorized by Avalue. The system will then automatically issue a RMA number.

When applying for the RMA number, it is essential to fill in basic information of the customer and the product, together with detailed description of the problem encountered. If possible, avoid using ambiguous words such as "does not work" or "problematic". Without a substantial description of the problem, it is hard to start the repair and will cause prolonged repair time. Lacking detailed statement of fault steps also makes the problem hard to be identified, sometimes resulting in second-time repairs.

In case the customer can't define the cause of problem, please contact Avalue application engineers. Sometimes when the problem can be resolved even before the customer sends back the product.

On the other hand, if the customer only returns the key parts to Avalue for repair, it is necessary that the serial number of the entire unit is given in the "Problem Description" field, so that warranty period can be ruled accordingly; or Avalue will handle the case as an Out-of- warranty case.

3.2 Return of faulty product for repair

It is recommended that the customer not to return the accessories (manual, connection cables, etc.) with the products for repair, devices such as CPU, DRAM, CF memory card, etc., shall also be removed from the faulty goods before return for repair. If these devices are relevant to described repair problems and necessary to be returned with the goods; please clearly indicate the items included in the eRMA application form. Avalue shall not be responsible for any item that is not itemized. Moreover, make sure the problem(s) are detailed in the "Problem Description" field.

In the list of delivery, the customer may fill-in a value which is lower than the actual value, to prevent customs levying a higher tax over the excessive value of the return goods. The customer shall be held responsible for extra fees caused by this. We strongly recommend that "Invoice for customs purpose only with no commercial value" be indicated on the delivery note. Also for the purpose of expedited handling, please printout the RMA number and put it in the carton, also indicate the number outside of the carton, with the recipient addressing to Avalue RMA Department.

When returning the defective product, please use an anti-static bag or ESD material to pack it properly. In case of improper packing resulting in damages in the transportation process, Avalue reserves the right to reject the un-repaired faulty good at the customer's costs. Furthermore, it is suggested that the faulty goods shall be sent via a door-to-door courier service. The customer shall be held responsible for any customs clearance fee or extra expenses if Air-Cargo is used for the delivery.

In case of a DOA situation of a new product, Avalue will be responsible for the product and the freight. If the faulty goods are within the warranty period, the sender will take responsibility for the freight. For an out-of-warranty case, the customer shall be responsible for the freight of both trips.

3.3 Maintenance Charge

Avalue will charge a moderate repair fee for the following conditions:

- The warranty period has expired.
- Product has been altered or its label of the serial number has been torn off.
- Product functionality issues resulting from improper use by the user, unauthorized dismantle or alteration, unfit operation environment, improper maintenance, accident

or other causes. Avalue reserves the right for the ruling of the aforementioned situations.

- Product damage resulting from lightning, flood, earthquake or other calamities.
- The warranty rules for non-Avalue products and accessories shall be in accordance with standards set up by the original supplier. These products and accessories include RAM, HDD, FDD, CD-ROM, CPU, FAN, etc.
- Product upgrade request or test request submitted by the customer after expiry of the warranty.
- PCBA with conformal coating.
- Avalue semi-product and outsourced products without Avalue serial number
- Products before the mass production stage, i.e. engineering samples.
- In case the products received are examined as NPF (No Problem Found) within the warranty period, the customer shall be responsible for the freight of both trips.
- Please contact your local distributor to examine in advance to prevent unnecessary freight cost.

For system failure of out-of-warranty products, Avalue will provide a quotation prior to repair service. When the customer applies for the cost, please refer to the Quotation number. In case the customer does not return the DOA product that has already been replaced by a new one, or the customer does not sign back the quotation of the out-of-warranty maintenance, Avalue reserves the right of whether or not to provide the repair service. In case the customer does not reply in 3 months, Avalue shall directly scrap or return the product back to customer at customer's cost without further notice to the customer.

3.4 Maintenance service of phased-out products

For servicing phased-out products, Avalue provides an extended period, starting the date of phase-out, as a guaranteed maintenance period of such products, for continuance of the maintenance service to meet customer's requirements. In case of unexpected factors causing Avalue to be unable to repair/replace a warranted but phased-out product, Avalue will, depending on the availability, upgrade the product (free of charge with continued warranty period as of the original product), or, give partial refund (based on the length of the remaining warranty period) to solve this kind of problem.

3.5 Maintenance Report

On completion of repair of a defective product, a Maintenance Report indicating the maintenance result and part(s) replaced (if any) will be sent to the customer together with the product. If the customer demands an additional maintenance analysis report, a service fee of various level will be charged depending on the warranty status. In case the analysis result shows that the defect attributes to Avalue's faulty design or process, the analysis fee will be exempted.

4. Service Products

Avalue provides service products to manage with different customer needs. Should you have any need, please consult to Avalue Sales Department.

Defect Analysis Report (DAR)

Avalue provides DAR (Defect Analysis Report) services aiming to elevating customer satisfaction. A DAR includes defect cause identification/verification/suggestion and improvement precautions, with instructions on correct usage for the avoidance of any reoccurrence.

Upgrade Service

Avalue is capable to provide system upgrade service for customization requirements. This upgrade service is applicable for main parts, such as CPU, memory, HDD, SSD, storage devices; also replacements motherboards of systems. Please contact Avalue sales for details to evaluate the possibility of system upgrade service and obtain information of lead time and price.

Safety Instructions

Safety Precautions

Before installing and using this device, please note the following precautions.

1. Read these safety instructions carefully.
2. Keep this User's Manual for future reference.
3. Disconnected this equipment from any AC outlet before cleaning.
4. For plug-in equipment, the power outlet socket must be located near the equipment and must be easily accessible.
5. Keep this equipment away from humidity.
6. Put this equipment on a reliable surface during installation. Dropping it or letting it fall may cause damage.
7. Make sure the voltage of the power source is correct before connecting the equipment to the power outlet.
8. Use a power cord that has been approved for using with the product and that it matches the voltage and current marked on the product's electrical range label. The voltage and current rating of the cord must be greater than the voltage and current rating marked on the product.
9. Position the power cord so that people cannot step on it. Do not place anything over the power cord.
10. All cautions and warnings on the equipment should be noted.
11. If the equipment is not used for a long time, disconnect it from the power source to

HPS-GNRD4A

avoid damage by transient overvoltage.

12. Never pour any liquid into an opening. This may cause fire or electrical shock.

13. Never open the equipment. For safety reasons, the equipment should be opened only by qualified service personnel. If one of the following situations arises, get the equipment checked by service personnel:

- The power cord or plug is damaged.
- Liquid has penetrated into the equipment.
- The equipment has been exposed to moisture.
- The equipment does not work well, or you cannot get it work according to the user's manual.
- The equipment has been dropped and damaged.
- The equipment has obvious signs of breakage.

14. CAUTION: Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer.

15. Equipment intended only for use in a RESTRICTED ACCESS AREA.

Explanation of Graphical Symbols

	Warning	A WARNING statement provides important information about a potentially hazardous situation which, if not avoided, could result in death or serious injury.
	Caution	A CAUTION statement provides important information about a potentially hazardous situation which, if not avoided, may result in minor or moderate injury to the user or patient or in damage to the equipment or other property.
	Note	A NOTE provides additional information intended to avoid inconveniences during operation.
		Direct current.
		Alternating current
		Stand-by, Power on
		FCC Certification
		CE Certification
		Follow the national requirements for disposal of equipment.
		Stacking layer limit
		This side up

		Fragile Packaging
		Beware of water damage, moisture-proof
		Carton recyclable
		Handle with care
		Follow operating instructions of consult instructions for use.
		WARNING • INGESTION HAZARD: This product contains a button cell or coin battery. • DEATH or serious injury can occur if ingested. • A swallowed button cell or coin battery can cause Internal Chemical Burns in as little as 2 hours. • KEEP new and used batteries OUT OF REACH of CHILDREN. • Seek immediate medical attention if a battery is suspected to be swallowed or inserted inside any part of the body.

Disposing of your old product

WARNING:

There is danger of explosion if the battery is mishandled or incorrectly replaced. Replace only with the same type of battery. Do not disassemble it or attempt to recharge it outside the system. Do not crush, puncture, dispose of in fire, short the external contacts, or expose to water or other liquids. Dispose of the battery in accordance with local regulations and instructions from your service provider.

CAUTION:

- Lithium Battery Caution: Danger of explosion if battery is incorrectly replaced. Replace only with same or equivalent type. Dispose batteries according to manufacturer's instructions.
- Disposal of a BATTERY into fire or a hot oven, or mechanically crushing or cutting of a BATTERY, that can result in an EXPLOSION
- Leaving a BATTERY in an extremely high temperature surrounding environment that can result in an EXPLOSION or the leakage of flammable liquid or gas.
- A BATTERY subjected to extremely low air pressure that may result in an EXPLOSION or the leakage of flammable liquid or gas.

Mise en garde!

AVERTISSEMENT : Il existe un risque d'explosion si la batterie est mal manipulée ou remplacée de manière incorrecte. Remplacez uniquement par le même type de batterie. Ne le démontez pas et ne tentez pas de le recharger en dehors du système. Ne pas écraser, percer, jeter au feu, court-circuiter les contacts externes ou exposer à l'eau ou à d'autres liquides. Jetez la batterie conformément aux réglementations locales et aux instructions de votre fournisseur de services.

MISE EN GARDE:

- Pile au lithium Attention : Danger d'explosion si la pile n'est pas remplacée correctement. Remplacer uniquement par un type identique ou équivalent. Jetez les piles conformément aux instructions du fabricant.
- L'élimination d'une BATTERIE dans le feu ou dans un four chaud, ou l'écrasement ou le découpage mécanique d'une BATTERIE, pouvant entraîner une EXPLOSION
- Laisser une BATTERIE dans un environnement à température extrêmement élevée pouvant entraîner une EXPLOSION ou une fuite de liquide ou de gaz inflammable.
- UNE BATTERIE soumise à une pression d'air extrêmement basse pouvant entraîner une EXPLOSION ou une fuite de liquide ou de gaz inflammable.

Content

1. Getting Started	18
1.1 Safety Precautions	18
1.2 Packing List	19
1.3 System Specifications	20
1.4 System Overview	27
1.4.1 Front View	27
1.4.2 Rear View	27
1.5 System Dimensions	29
1.5.1 1300W ATX PSU	29
1.5.2 1600W CRPS	30
2. Hardware Configuration	31
2.1 HPS-GNRD4A connector mapping	32
2.1.1 Serial Port connector (COM)	32
2.1.2 VGA connector (VGA)	32
2.2 HPM-GNRDE Overviews	33
2.3 HPM-GNRDE Jumper & Connector list	34
2.4 HPM-GNRDE Jumpers & Connectors settings	36
2.4.1 Force PWRON setting (JPALLPWRON1)	36
2.4.2 Clear CMOS (JPCMOSCLEAR1)	36
2.4.3 Boot UART5 setting (JPBOOT_UART5)	37
2.4.4 CPLD JTAG header (JCPLD_JTAG1)	37
2.4.5 System fan connector 1 (SYS_FAN1)	38
2.4.6 System fan connector 2 (SYS_FAN2)	38
2.4.7 System fan connector 3 (SYS_FAN3)	39
2.4.8 System fan connector 4 (SYS_FAN4)	39
2.4.9 System fan connector 5 (SYS_FAN5)	40
2.4.10 System fan connector 6 (SYS_FAN6)	40
2.4.11 CPU fan connector 1 (CPU_FAN1)	41
2.4.12 CPU fan connector 2 (CPU_FAN2)	41
2.4.13 SPI connector (JSPI1)	42
2.4.14 Serial port 2 connector (JCOM2)	42
2.4.15 BMC_UART5 debug connector (JCOM5)	43
2.4.16 ATX 12V power connector 1 (ATX12V1)	43
2.4.17 ATX 12V power connector 2 (ATX12V2)	44
2.4.18 ATX 12V power connector 3 (ATX12V3)	44

2.4.19	ATX 12V power connector 4 (ATX12V4).....	45
2.4.20	ATX power connector (ATXPWR1)	45
2.4.21	Power supply PMBus connector (JPMBUS1)	46
2.4.22	USB3.1 Gen1 connector (JUSB1)	46
2.4.23	USB3.1 Gen1 connector (JUSB2)	47
2.4.24	Front Panel connector (JFP1)	47
2.4.25	Inlet Thermal Sensor (JINLET_SER1)	48
2.4.26	Outlet Thermal Sensor (JOUTLET_SER1)	48
2.4.27	HDD Backplane thermal Sensor (JHDD_SER1)	49
2.4.28	CASE OPEN connector (JCASE_OPEN1)	49
2.4.29	VROC Header (JRAID_KEY1)	50
2.4.30	CPU PCIE HP SMB connector (JPEHPSMB1)	50
2.4.31	ESPI connector (JESPI1)	51
2.4.32	NMI button (JNMI_BTN1)	51
3.	Drivers Installation.....	52
3.1	Install Chipset Driver	53
3.2	Install VGA Driver	54
3.3	Install Ethernet Driver	55
3.4	Install QuickAssist Technology Driver	56
3.5	Install VROC Driver	57
4.	BIOS Setup	59
4.1	Introduction.....	60
4.2	Starting Setup.....	60
4.3	Using Setup.....	61
4.4	Getting Help.....	62
4.5	In Case of Problems	62
4.6	BIOS setup	63
4.6.1	Main Menu	63
4.6.1.1	System Language	63
4.6.1.2	System Date	63
4.6.1.3	System Time	63
4.6.2	Advanced Menu	64
4.6.2.1	Trusted Computing.....	64
4.6.2.2	AST2600 Super IO Configuration	65
4.6.2.2.1	Serial Port 1 Configuration	66
4.6.2.3	Serial Port Console Redirection	66
4.6.2.4	Option ROM Dispatch Policy.....	67
4.6.2.5	USB Configuration.....	68
4.6.2.6	Network Stack Configuration.....	69
4.6.2.7	NVMe Configuration	69

4.6.3	Platform Config	70
4.6.3.1	IBL-IO Configuration.....	70
4.6.3.2	Miscellaneous Configuration	71
4.6.4	Socket Config.....	72
4.6.4.1	Processor Configuration.....	72
4.6.4.2	Memory Configuration	73
4.6.4.2.1	Memory Topology.....	74
4.6.4.2.2	Memory RAS Configuration	74
4.6.4.3	IIO Configuration	75
4.6.4.3.1	Socket0 Configuration	75
4.6.4.3.1.1	PCI Express 0	76
4.6.4.3.1.1.1	Intel VMD technology	77
4.6.4.3.1.1.2	Port A ~ Port H	77
4.6.4.3.1.2	PCI Express 1	79
4.6.4.3.1.2.1	Intel VMD technology	80
4.6.4.3.1.2.2	Port A ~ Port H	81
4.6.4.3.1.3	PCI Express 2	81
4.6.4.3.1.3.1	Intel VMD technology	82
4.6.4.3.1.3.2	Port A ~ Port H	83
4.6.4.3.1.4	PCI Express 3	83
4.6.4.3.1.4.1	Intel VMD technology	84
4.6.4.3.1.4.2	Port A ~ Port H	85
4.6.4.3.1.5	PCI Express 4	85
4.6.4.3.1.5.1	Intel VMD technology	86
4.6.4.3.1.5.2	Port A ~ Port H	87
4.6.4.3.1.6	PCI Express 5	87
4.6.4.3.1.6.1	Intel VMD technology	88
4.6.4.3.1.6.2	Port A ~ Port H	89
4.6.4.3.2	Socket1 Configuration	89
4.6.4.3.2.1	PCI Express 0	90
4.6.4.3.2.1.1	Intel VMD technology	91
4.6.4.3.2.1.2	Port A ~ Port H	91
4.6.4.3.2.2	PCI Express 1	92
4.6.4.3.2.2.1	Intel VMD technology	93
4.6.4.3.2.2.2	Port A ~ Port H	93
4.6.4.3.2.3	PCI Express 2	94
4.6.4.3.2.3.1	Intel VMD technology	95
4.6.4.3.2.3.2	Port A ~ Port H	95
4.6.4.3.2.4	PCI Express 3	96
4.6.4.3.2.4.1	Intel VMD technology	97

4.6.4.3.2.4.2	Port A ~ Port H	97
4.6.4.3.2.5	PCI Express 4	98
4.6.4.3.2.5.1	Intel VMD technology	99
4.6.4.3.2.5.2	Port A ~ Port H	99
4.6.4.3.2.6	PCI Express 5	100
4.6.4.3.2.6.1	Intel VMD technology	101
4.6.4.3.2.6.2	Port A ~ Port H	101
4.6.4.3.3	Global Configuration.....	102
4.6.4.3.4	Intel VMD technology	102
4.6.4.3.4.1	Intel VMD for Volume Management Device on Socket 0	103
4.6.4.3.4.2	Intel VMD for Volume Management Device on Socket 1	103
4.6.4.4	Advanced Power Management Configuration	104
4.6.4.4.1	CPU P State Control.....	104
4.6.4.4.2	CPU C State Control	105
4.6.5	Server Mgmt.....	106
4.6.5.1	System Event Log	108
4.6.5.2	Bmc self test log	109
4.6.5.3	BMC network configuration	110
4.6.5.4	BMC User Settings	110
4.6.5.4.1	BMC Add User Details.....	111
4.6.5.4.2	BMC Delete User Details.....	111
4.6.5.4.3	BMC Change User Settings	112
4.6.6	Security	112
4.6.6.1	Secure Boot.....	113
4.6.6.1.1	Expert Key Management	115
4.6.7	Boot.....	117
4.6.8	Save and exit	119
4.6.8.1	Save Changes and Exit.....	120
4.6.8.2	Discard Changes and Exit.....	120
	Use the Discard changes and Exit option to exit the system without saving the changes made to the BIOS configuration setup program.	120
4.6.8.3	Save Changes and Reset	120
4.6.8.4	Discard Changes and Reset	120
4.6.8.5	Save Changes.....	120
4.6.8.6	Discard Changes.....	120
4.6.8.7	Restore Defaults.....	120
4.6.8.8	Save as User Defaults.....	120
4.6.8.9	Restore User Defaults	120

1. Getting Started

1.1 Safety Precautions

Warning!



Always completely disconnect the power cord from your chassis whenever you work with the hardware. Do not make connections while the power is on. Sensitive electronic components can be damaged by sudden power surges. Only experienced electronics personnel should open the PC chassis.

Caution!



Always ground yourself to remove any static charge before touching the CPU card. Modern electronic devices are very sensitive to static electric charges. As a safety precaution, use a grounding wrist strap at all times. Place all electronic components in a static-dissipative surface or static-shielded bag when they are not in the chassis.

Risk of Explosion if Battery is replaced by an Incorrect Type. Dispose of Used Batteries According to the Instructions.

Français:

Attention!



Débranchez le câble d'alimentation de votre châssis chaque fois que vous travaillez avec le matériel. Ne faites pas de connexion lorsque le système est allumé. Les composants électroniques sensibles peuvent être endommagés par les surtensions soudaines. Seule les personnels expérimentés de l'électronique peuvent ouvrir le châssis du PC.

Précaution!



Il faut toujours mettre à la masse pour éliminer l'électricité statique avant de toucher la carte CPU. Les appareils électroniques modernes sont très sensibles aux électricité statique. Pour des raisons de sécurité, utilisez un bracelet électrostatique. Placez tous les composants électroniques sur une surface antistatique ou dans un sac antistatique quand ils ne sont pas dans le châssis.

Risque d'explosion si la batterie est remplacée par un type incorrect. Jetez les piles usagées selon les instructions

Warning!

Class I Equipment. This equipment must be earthed. The power plug must be connected to a properly wired earth ground socket outlet. An improperly wired socket outlet could place hazardous voltages on accessible metal parts.

Warning!**IT Room**

Suitable for installation in Information Technology Rooms in accordance with Article 645 of the National Electrical Code and NFPA 75.

Warning!**RAL**

The device can only be used in a fixed location such as a lab or a machine room. When you install the device, ensure that the protective earthing connection of the socket-outlet is verified by a skilled person.

Warning!**For RTC battery, current statement in the manual is acceptable.**

There is danger of explosion if the battery is mishandled or incorrectly replaced. Replace only with the same type of battery. Do not disassemble it or attempt to recharge it outside the system. Do not crush, puncture, dispose of in fire, short the external contacts, or expose to water or other liquids. Dispose of the battery in accordance with local regulations and instructions from your service provider.


1.2 Packing List

- 1 x HPS-GNRD4A barebone system
 - HPM-GNRDE motherboard
 - 1300W PSU or 1600W CRPS
- 2 x Front door key
- 2 x LGA4710 CPU carrier-E2B

1.3 System Specifications

System Information																																																																								
Processor	Dual Intel® Xeon® 6, Max. TDP at 350W for single socket/ Max. TDP at 270W for each L10 system: 2 x Intel® Xeon® 6740P Processor, Intel (P/N: BCC-CPU-6740PR)																																																																							
System Memory	16 x DDR5 6400MT/s RDIMM and 8000MT/s MRDIMM Up to 4TB GNR-SP DDR DIMM Support Matrix DDR5-6400 rated RDIMMs Supported Only <table><tr><th rowspan="2">Type</th><th rowspan="2">Ranks Per DIMM and Data Width</th><th colspan="3">DIMM Capacity (GB)</th><th colspan="2">Channel Speed (MT/s); Voltage (V); Slots per Channel (SPC) & DIMMs per Channel (DPC)</th></tr><tr><th colspan="3">DRAM Density</th><th>1DPC/2SPC</th><th>2DPC/2SPC</th></tr><tr><td></td><td></td><td>16Gb</td><td>24Gb</td><td>32Gb</td><td></td><td>1.1V</td></tr><tr><td rowspan="4">RDIMM</td><td>1Rx8</td><td>16GB</td><td>24GB</td><td></td><td rowspan="4">6400, 6000, 5600, 5200, 4800 (DDR5-6400 rated RDIMMs only)</td><td rowspan="4">5200, 4800 (DDR5-6400 rated RDIMMs only)</td></tr><tr><td>1Rx4</td><td>32GB</td><td>48GB</td><td></td></tr><tr><td>2Rx8</td><td>32GB*</td><td>48GB</td><td></td></tr><tr><td>2Rx4</td><td>64GB*</td><td>96GB*</td><td>128GB**</td></tr><tr><td>RDIMM (9x4)</td><td>2Rx4</td><td>64GB</td><td></td><td></td><td></td><td></td></tr><tr><td rowspan="2">RDIMM 3DS</td><td>4Rx4</td><td>128GB*</td><td></td><td></td><td></td><td></td></tr><tr><td>8Rx4</td><td>256GB*</td><td></td><td></td><td></td><td></td></tr><tr><td rowspan="2">MCR DIMM</td><td>2Rx8</td><td>32GB</td><td></td><td></td><td>8000, 7200 (MCR-8800 only)</td><td>N/A (no 2DPC configs for MCR)</td></tr><tr><td>2Rx4</td><td>64GB</td><td></td><td></td><td></td><td></td></tr></table> *Supported in 15/25/45/85 systems ** Supported in 25/45/85 systems All others support 15/25 only L10 system: 2 x DDR5 5600 32G RDIMM at DIMM1, DIMM9	Type	Ranks Per DIMM and Data Width	DIMM Capacity (GB)			Channel Speed (MT/s); Voltage (V); Slots per Channel (SPC) & DIMMs per Channel (DPC)		DRAM Density			1DPC/2SPC	2DPC/2SPC			16Gb	24Gb	32Gb		1.1V	RDIMM	1Rx8	16GB	24GB		6400, 6000, 5600, 5200, 4800 (DDR5-6400 rated RDIMMs only)	5200, 4800 (DDR5-6400 rated RDIMMs only)	1Rx4	32GB	48GB		2Rx8	32GB*	48GB		2Rx4	64GB*	96GB*	128GB**	RDIMM (9x4)	2Rx4	64GB					RDIMM 3DS	4Rx4	128GB*					8Rx4	256GB*					MCR DIMM	2Rx8	32GB			8000, 7200 (MCR-8800 only)	N/A (no 2DPC configs for MCR)	2Rx4	64GB				
Type	Ranks Per DIMM and Data Width			DIMM Capacity (GB)			Channel Speed (MT/s); Voltage (V); Slots per Channel (SPC) & DIMMs per Channel (DPC)																																																																	
		DRAM Density			1DPC/2SPC	2DPC/2SPC																																																																		
		16Gb	24Gb	32Gb		1.1V																																																																		
RDIMM	1Rx8	16GB	24GB		6400, 6000, 5600, 5200, 4800 (DDR5-6400 rated RDIMMs only)	5200, 4800 (DDR5-6400 rated RDIMMs only)																																																																		
	1Rx4	32GB	48GB																																																																					
	2Rx8	32GB*	48GB																																																																					
	2Rx4	64GB*	96GB*	128GB**																																																																				
RDIMM (9x4)	2Rx4	64GB																																																																						
RDIMM 3DS	4Rx4	128GB*																																																																						
	8Rx4	256GB*																																																																						
MCR DIMM	2Rx8	32GB			8000, 7200 (MCR-8800 only)	N/A (no 2DPC configs for MCR)																																																																		
	2Rx4	64GB																																																																						
BIOS Information	AMI UEFI BIOS																																																																							
Watchdog Timer	System reset event 0.1~6553.5 second. (IPMI command)																																																																							
H/W Status Monitor	Temperature. Fan. Voltage. Case open. (1 x 2.5mm pitch Box Wafer, Pinrex 753-71-02TW07 or equivalent)																																																																							
RAID	Intel VMD and Virtual RAID on CPU(VROC) 1 x Intel VROC header (Note: RAID key for CPU PCIe NVME only)																																																																							
TPM	TPM 2.0 NuvoTon_NPCT760AABYX or equivalent TCM Nationz Z32H330TC or equivalent (Optional)																																																																							
SBC	HPM-GNRDE																																																																							
BMC	IPMI 2.0 with AST 2600 BMC controller onboard.																																																																							
Other	1 x Inlet sensor board 1 x Outlet sensor board 1 x Case open sensor																																																																							
Expansion																																																																								
PCIe (Gen X)	5 x PCIe Gen5 x16 1 x PCIe Gen5 x8 Slot 1, PCIe Gen5 x16 from 1st CPU Slot 2, PCIe Gen5 x16 from 2nd CPU																																																																							

	Slot 3, PCIe Gen5 x16 from 2nd CPU Slot 4, PCIe Gen5 x16 from 2nd CPU Slot 5, PCIe Gen5 x16 from 2nd CPU Slot 6, PCIe Gen5 x8 from 1st CPU(This Slot is closest to the CPU)
Storage	
M.2 (Signal)	1 x M.2 M-Key Slot to support 1 x PCIe 5.0 x4 NVMe SSD from 1st CPU 2242/2260/2280/22110 form factor 1 x M.2 M-Key Slot to support 1 x PCIe 5.0 x4 NVMe SSD from 1st CPU 2242/2260/2280 form factor
2.5" Drive Bay (Height)	3 x 2.5" Drive Bay L10 system:1x Transcend 512GB, U.2 SSD, PCIe Gen4x4, NVMe, 3D TLC BiCS5, PE: 3K, extended temp., PLP
Other	4 x Slim SAS 8i (SFF-8654) connector (from 1st CPU) 3 x MCIO x8 connectors (SFF-TA-1016) (from 2nd CPU)
Front I/O	
USB Port	2 x USB 3.2 Gen1 Ports
Power Button	1 x Power button
Reset Button	1 x Reset button
LED Indicator	1 x Power state 1 x Disk drive activity 1 x Network activity (LAN1)
System Fan	1 x Front FAN 4P/12V/30cm 120x120x25mm 2700rpm
Rear I/O	
USB Port	6 x USB 3.2 Gen2 ports
COM Port	1 x RS232 Port
VGA	Display Priority: VGA 1 x VGA Port
LAN Port	5 x RJ-45 (LAN 1 port shared with IPMI 2.0) MGMT port: Dedicated IPMI function access LAN 1: 1GbE Ethernet port, LAN1 shares with IPMI function access LAN 2: 1GbE Ethernet port LAN 3 and 4: 2 x 10GbE Ethernet ports
AC/DC Input	1 x AC-In power connector from Power Supply ATX 1300W Delta GPS-1300CBA A36 (Default) 2 x AC-In power connectors from Power Supply CRPS 1600W Zippy ZRH2-5AF0K2V (Option)
System Fan	2 x Rear PWM FAN 4P/12V/18cm 80x80x38mm 8300rpm
Onboard I/O	
SATA Signal	2x Jmicro JMB585-QHBA0A 5x SATA III Supports up to 6.0 Gb/s(From PCIe Gen3

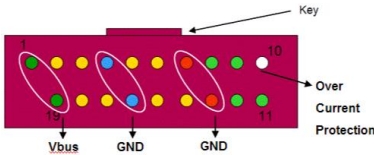	x2) 2 x Mini-SAS HD 4i (for 4x SATA Only) 1 x 7pin SATA connector																																																												
USB Port	2 x USB 3.1 Gen1 ports by ASMEDIA ASM3142 (From PCIe Gen 3 x2) -1 x USB 3.1 Gen1 2.0mm pitch Box Header (Pinrex 52X-8020GB52 or equivalent) 3 x USB 3.1 Gen1 by UPD720201K8-701-BAC-A (From PCIe Gen 2 x1) -1 x USB3.1 Gen1 2.0mm pitch Box Header (Pinrex 52X-8020GB52 or equivalent) -1 x USB 3.1 Gen1 type A receptacle Pin definition:  <table><thead><tr><th>Pin No.</th><th>Signal</th><th>Description</th></tr></thead><tbody><tr><td>1</td><td>Vbus</td><td>Power</td></tr><tr><td>2</td><td>IntA_P1_SSRX-</td><td>USB3 ICC Port1 SuperSpeed Rx-</td></tr><tr><td>3</td><td>IntA_P1_SSRX+</td><td>USB3 ICC Port1 SuperSpeed Rx+</td></tr><tr><td>4</td><td>GND</td><td>GND</td></tr><tr><td>5</td><td>IntA_P1_SSTX-</td><td>USB3 ICC Port1 SuperSpeed Tx-</td></tr><tr><td>6</td><td>IntA_P1_SSTX+</td><td>USB3 ICC Port1 SuperSpeed Tx+</td></tr><tr><td>7</td><td>GND</td><td>GND</td></tr><tr><td>8</td><td>IntA_P1_D-</td><td>USB3 ICC Port1 D- (USB2 Signal D-)</td></tr><tr><td>9</td><td>IntA_P1_D+</td><td>USB3 ICC Port1 D+ (USB2 Signal D+)</td></tr><tr><td>10</td><td>ID</td><td>Over Current Protection</td></tr><tr><td>11</td><td>IntA_P2_D+</td><td>USB3 ICC Port2 D+ (USB2 Signal D+)</td></tr><tr><td>12</td><td>IntA_P2_D-</td><td>USB3 ICC Port2 D- (USB2 Signal D-)</td></tr><tr><td>13</td><td>GND</td><td>GND</td></tr><tr><td>14</td><td>IntA_P2_SSTX+</td><td>USB3 ICC Port2 SuperSpeed Tx+</td></tr><tr><td>15</td><td>IntA_P2_SSTX-</td><td>USB3 ICC Port2 Super Speed Tx-</td></tr><tr><td>16</td><td>GND</td><td>GND</td></tr><tr><td>17</td><td>IntA_P2_SSRX+</td><td>USB3 ICC Port2 SuperSpeed Rx+</td></tr><tr><td>18</td><td>IntA_P2_SSRX-</td><td>USB3 ICC Port2 SuperSpeed Rx-</td></tr><tr><td>19</td><td>Vbus</td><td>Power</td></tr></tbody></table>	Pin No.	Signal	Description	1	Vbus	Power	2	IntA_P1_SSRX-	USB3 ICC Port1 SuperSpeed Rx-	3	IntA_P1_SSRX+	USB3 ICC Port1 SuperSpeed Rx+	4	GND	GND	5	IntA_P1_SSTX-	USB3 ICC Port1 SuperSpeed Tx-	6	IntA_P1_SSTX+	USB3 ICC Port1 SuperSpeed Tx+	7	GND	GND	8	IntA_P1_D-	USB3 ICC Port1 D- (USB2 Signal D-)	9	IntA_P1_D+	USB3 ICC Port1 D+ (USB2 Signal D+)	10	ID	Over Current Protection	11	IntA_P2_D+	USB3 ICC Port2 D+ (USB2 Signal D+)	12	IntA_P2_D-	USB3 ICC Port2 D- (USB2 Signal D-)	13	GND	GND	14	IntA_P2_SSTX+	USB3 ICC Port2 SuperSpeed Tx+	15	IntA_P2_SSTX-	USB3 ICC Port2 Super Speed Tx-	16	GND	GND	17	IntA_P2_SSRX+	USB3 ICC Port2 SuperSpeed Rx+	18	IntA_P2_SSRX-	USB3 ICC Port2 SuperSpeed Rx-	19	Vbus	Power
	Pin No.	Signal	Description																																																										
	1	Vbus	Power																																																										
2	IntA_P1_SSRX-	USB3 ICC Port1 SuperSpeed Rx-																																																											
3	IntA_P1_SSRX+	USB3 ICC Port1 SuperSpeed Rx+																																																											
4	GND	GND																																																											
5	IntA_P1_SSTX-	USB3 ICC Port1 SuperSpeed Tx-																																																											
6	IntA_P1_SSTX+	USB3 ICC Port1 SuperSpeed Tx+																																																											
7	GND	GND																																																											
8	IntA_P1_D-	USB3 ICC Port1 D- (USB2 Signal D-)																																																											
9	IntA_P1_D+	USB3 ICC Port1 D+ (USB2 Signal D+)																																																											
10	ID	Over Current Protection																																																											
11	IntA_P2_D+	USB3 ICC Port2 D+ (USB2 Signal D+)																																																											
12	IntA_P2_D-	USB3 ICC Port2 D- (USB2 Signal D-)																																																											
13	GND	GND																																																											
14	IntA_P2_SSTX+	USB3 ICC Port2 SuperSpeed Tx+																																																											
15	IntA_P2_SSTX-	USB3 ICC Port2 Super Speed Tx-																																																											
16	GND	GND																																																											
17	IntA_P2_SSRX+	USB3 ICC Port2 SuperSpeed Rx+																																																											
18	IntA_P2_SSRX-	USB3 ICC Port2 SuperSpeed Rx-																																																											
19	Vbus	Power																																																											
COM Port	1 x RS232 ports (1 x 2.0mm pitch Box Header) *(S/W disable, only supported Ubuntu 24.02 if enable function) Pin definition: Follow Avalue standard.																																																												
RTC Battery	1 x Horizontal Socket Type CMOS Battery Holder with CR2450 + NXP/PCF85053ATKJ																																																												
Front Panel	1 x front panel connector (2.54 mm Pitch) <table><thead><tr><th>Pin</th><th>Function</th><th>Pin</th><th>Function</th></tr></thead><tbody><tr><td>1-3</td><td>HDD LED</td><td>2-4</td><td>POWER LED</td></tr><tr><td>5-7</td><td>RESET BUTTON</td><td>6-8</td><td>POWER BUTTON</td></tr><tr><td>9-11</td><td>STATUS LED</td><td>10-12</td><td>LAN1 ACT LED</td></tr></tbody></table>	Pin	Function	Pin	Function	1-3	HDD LED	2-4	POWER LED	5-7	RESET BUTTON	6-8	POWER BUTTON	9-11	STATUS LED	10-12	LAN1 ACT LED																																												
Pin	Function	Pin	Function																																																										
1-3	HDD LED	2-4	POWER LED																																																										
5-7	RESET BUTTON	6-8	POWER BUTTON																																																										
9-11	STATUS LED	10-12	LAN1 ACT LED																																																										

	13-15	UID LED	14-16	STBY POWER LED																																																
	17-19	UID BUTTON	18-20	LAN2-X ACT LED																																																
Notes: LAN2-X ACT LED, “X” means the max number of Ethernet ports.																																																				
Buzzer	1 x onboard buzzer																																																			
CPU/System FAN	2 x 4 Pin, pitch 2.54mm CPU Fan Header (4 Pin PWM) 6 x 4 Pin, pitch 2.54mm Chassis Fan Header (4 Pin PWM, 2 for front fans and 4 for rear fans)																																																			
Display																																																				
Graphic Chipset	1 x VGA port (DB15 on edge I/O) AST2600 BMC controller																																																			
Resolution	1920x1200@60Hz 32bpp																																																			
Ethernet																																																				
LAN Chipset	2 x Intel I210AT 1 x Intel E610-XAT2																																																			
Data Rate Per Port	2 x 1G Base-T Ethernet Controller 1 x Dual 10G Base-T Ethernet controller																																																			
LED Indicator	1G LAN:																																																			
	<table><tr><th rowspan="2">WOL</th><th rowspan="2">Status</th><th>Right</th><th colspan="2">Left</th></tr><tr><th>Yellow</th><th>Green</th><th>Orange</th></tr><tr><td>Don't care</td><td>No Link</td><td></td><td></td><td></td></tr><tr><td>Off</td><td>S3/S4/S5</td><td></td><td></td><td></td></tr><tr><td>On</td><td>10Mb Inactive</td><td></td><td></td><td></td></tr><tr><td>On</td><td>10Mb Active</td><td> B</td><td></td><td></td></tr><tr><td>On</td><td>100Mb Inactive</td><td></td><td></td><td></td></tr><tr><td>On</td><td>100Mb Active</td><td> B</td><td></td><td></td></tr><tr><td>On</td><td>1Gb Inactive</td><td></td><td></td><td></td></tr><tr><td>On</td><td>1Gb Active</td><td> B</td><td></td><td></td></tr></table>				WOL	Status	Right	Left		Yellow	Green	Orange	Don't care	No Link				Off	S3/S4/S5				On	10Mb Inactive				On	10Mb Active	 B			On	100Mb Inactive				On	100Mb Active	 B			On	1Gb Inactive				On	1Gb Active	 B		
	WOL	Status	Right	Left																																																
			Yellow	Green	Orange																																															
	Don't care	No Link																																																		
	Off	S3/S4/S5																																																		
	On	10Mb Inactive																																																		
	On	10Mb Active	 B																																																	
	On	100Mb Inactive																																																		
	On	100Mb Active	 B																																																	
On	1Gb Inactive																																																			
On	1Gb Active	 B																																																		
10G LAN:																																																				
Remind: The E610 10G LED display is different from the previous default 10G LED settings of Avalue.																																																				
<table><tr><th rowspan="2">WOL</th><th rowspan="2">Status</th><th>Right</th><th colspan="2">Left</th></tr><tr><th>Yellow</th><th>Green</th><th>Orange</th></tr><tr><td>Don't care</td><td>No Link</td><td></td><td></td><td></td></tr><tr><td>On</td><td>100Mb Inactive</td><td></td><td></td><td></td></tr><tr><td>On</td><td>100Mb Active</td><td> B</td><td></td><td></td></tr><tr><td>On</td><td>1Gb Inactive</td><td></td><td></td><td></td></tr><tr><td>On</td><td>1Gb Active</td><td> B</td><td></td><td></td></tr><tr><td>On</td><td>10Gb Inactive</td><td></td><td></td><td></td></tr><tr><td>On</td><td>10Gb Active</td><td> B</td><td></td><td></td></tr></table>				WOL	Status	Right	Left		Yellow	Green	Orange	Don't care	No Link				On	100Mb Inactive				On	100Mb Active	 B			On	1Gb Inactive				On	1Gb Active	 B			On	10Gb Inactive				On	10Gb Active	 B								
WOL	Status	Right	Left																																																	
		Yellow	Green	Orange																																																
Don't care	No Link																																																			
On	100Mb Inactive																																																			
On	100Mb Active	 B																																																		
On	1Gb Inactive																																																			
On	1Gb Active	 B																																																		
On	10Gb Inactive																																																			
On	10Gb Active	 B																																																		
Power Indicator: To identify whether the system is ready or dead.																																																				
1. Power button ON																																																				
2. Power indicator ON																																																				

	3. BIOS initialization, Power indicator from ON to blinking									
	4. Power indicator to always on means: A. ON. B. System Error.									
	Power Indicator	Condition	Memo	FAN status						
	OFF	S5	Power off	OFF						
	ON	System always Failed	System boot failed/VGA is not ready	ON						
	ON	BIOS ready to boot	VGA is ready. (Informed by BIOS)	ON						
	Blinking	BIOS initializing	Blinking (BMC to implement)	ON						
Power Requirement										
Voltage Input Conn.	1 x Std. 24 pin ATX Connector 4 x 8 Pin SSI 12V Connectors Connector current rating information.									
	MAXIMUM CURRENT RATING(Amperes) Wire-to-Wire and Wire-to- Board									
	Brass					Phosphor Bronze				
	Ckt.Size Wire	2 & 3	4 - 6	7 - 10	12 - 24	Ckt.Size Wire	2 & 3	4 - 6	7 - 10	12 - 24
	AWG #16	9	8	7	6	AWG #16	8	7	6	5
	AWG #18	9	8	7	6	AWG #18	8	7	6	5
	AWG #20	7	6	5	5	AWG #20	6	5	4	4
	AWG #22	5	4	4	4	AWG #22	4	3	3	3
	AWG #24	4	3	3	3	AWG #24	3	2	2	2
	AWG #26	3	2	2	2	AWG #26	2	1	1	1
AWG #28	2	1	1	1	AWG #28	1	1	1	1	
ACPI	Yes, S0 and S5									
Power Mode	H/W: ATX power well design only. BMC: AT (Default)									
Power Supply Unit	Delta 1300W PSU (Default) Zippy 1600W CRPS (Option)									
Mechanical & Environment										
Operating Temp.	Condition 1: Temperature: 0 to 35°C (L6 w/ Delta 1300W PSU) Condition 2: Temperature: 0 to 40°C (L6 w/ Zippy 1600W CRPS PSU) Condition 3: Temperature: 0 to 35°C (L10, GPU RTX 6000 Ada+A400) Condition 4: Temperature: 0 to TBC °C (L10 system, depends on added card spec.)									
Storage Temp.	-40°C 24hrs IEC60068-2-1 Cold test Test: Ab 70°C/ RH95% 24hrs IEC 60068-2-3 Test: CA									

Operating Humidity	35°C /RH95%/24hrs IEC 60068-2-56 Test: Cb
Dimension (W*L*H)	430mm x 650mm x 174.8mm
Weight	25.8kg
Vibration Test	Operational : 1. 0.25 Grms Random 2. Operation mode 3. Test Frequency : 5-500Hz 4. Test Axis : X,Y and Z axis 5. 30 min. per each axis 6. IEC 60068-2-64 Test:Fh Non-operational : 1. Test Acceleration : 0.5G 2. Test frequency : 5~500 Hz 3. Sweep : 1 Oct/ per one minute. (logarithmic) 4. Test Axis : X,Y and Z axis 5. Test time :30 min. each axis 6. System condition : Non-Operating mode 7. Reference IEC 60068-2-6 Testing procedures Package Vibration Test: 1. PSD: 0.026G²/Hz , 2.16 Grms 2. Non-operation mode 3. Test Frequency : 5-500Hz 4. Test Axis : X,Y and Z axis 5. 30 min. per each axis 6. IEC 60068-2-64 Test:Fh
Shock Test	Operational: 1. Wave form: Half Sine wave 2. Acceleration Rate: 5.0G for operation mode 3. Duration Time: 11ms 4. No. of Shock: Z axis 300 times 5. Test Axis: Z axis 6. Operation mode 7. Reference IEC 60068-2-27 Testing procedures
Drop Test	Package drop test : 1. One corner, three edges, six face 2. ISTA 2A, IEC-60068-2-32 Test:Ed
Software Support	
OS Information	Windows 11 SAC and LTSC

Windows Server 2025.
 Ubuntu 24.02
 Red Hat Enterprise Linux (RHEL) 8.0 or above




Note: Specifications are subject to change without notice.

DIMM population requirements					
		Install DIMM Qty:			
DIMM No.	CPU MEM Ch.	1	4	4	8
DIMM1	CPU1 CH-A DIMM0	V	V		V
DIMM2	CPU1 CH-B DIMM0			V	V
DIMM3	CPU1 CH-C DIMM0		V		V
DIMM4	CPU1 CH-D DIMM0			V	V
DIMM5	CPU1 CH-E DIMM0		V		V
DIMM6	CPU1 CH-F DIMM0			V	V
DIMM7	CPU1 CH-G DIMM0		V		V
DIMM8	CPU1 CH-H DIMM0			V	V


DIMM population requirements					
		Install DIMM Qty:			
DIMM No.	CPU MEM Ch.	2	8	8	16
DIMM1	CPU1 CH-A DIMM0	V	V		V
DIMM2	CPU1 CH-B DIMM0			V	V
DIMM3	CPU1 CH-C DIMM0		V		V
DIMM4	CPU1 CH-D DIMM0			V	V
DIMM5	CPU1 CH-E DIMM0		V		V
DIMM6	CPU1 CH-F DIMM0			V	V
DIMM7	CPU1 CH-G DIMM0		V		V
DIMM8	CPU1 CH-H DIMM0			V	V
DIMM9	CPU2 CH-A DIMM0	V	V		V
DIMM10	CPU2 CH-B DIMM0			V	V
DIMM11	CPU2 CH-C DIMM0		V		V
DIMM12	CPU2 CH-D DIMM0			V	V
DIMM13	CPU2 CH-E DIMM0		V		V
DIMM14	CPU2 CH-F DIMM0			V	V
DIMM15	CPU2 CH-G DIMM0		V		V
DIMM16	CPU2 CH-H DIMM0			V	V

1.4 System Overview

1.4.1 Front View

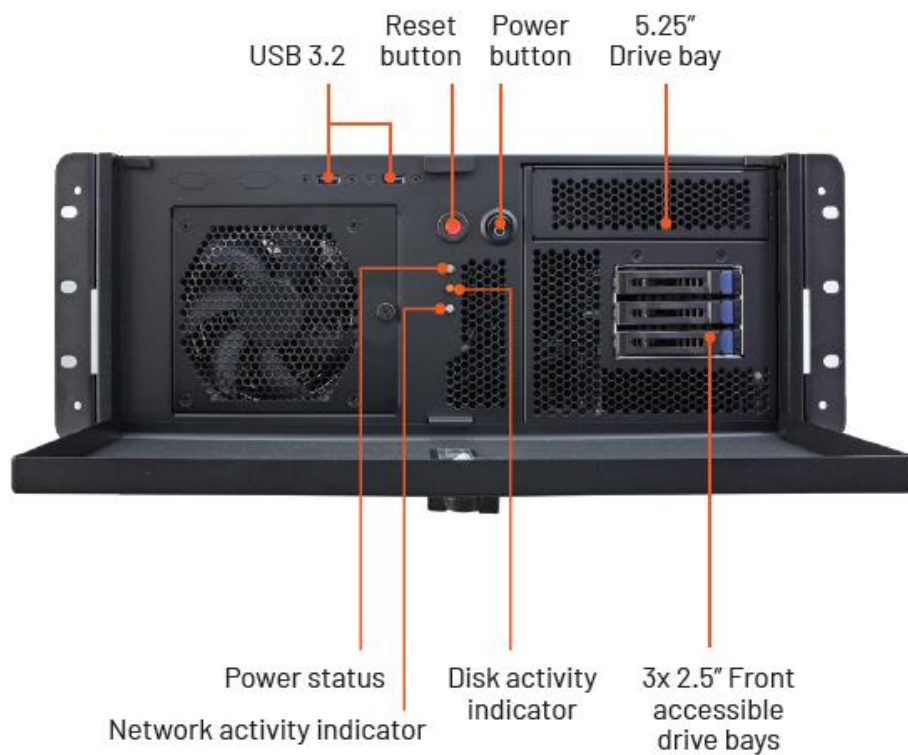

1.4.2 Rear View

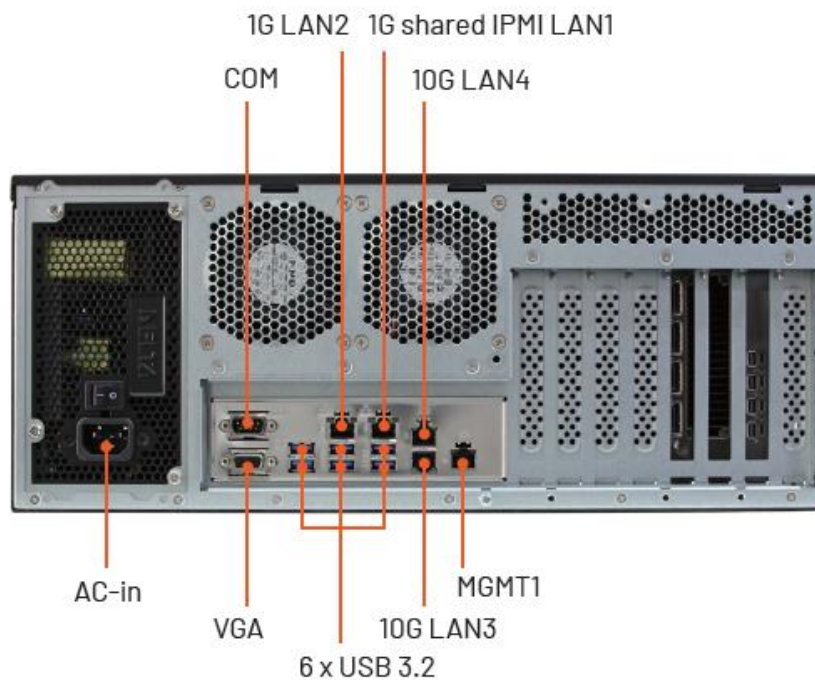


Connectors

Label	Function	Note
5.25" Drive bay	5.25" Drive bay	
2.5" Front accessible 2.5" drive bay	3 x 2.5" Front accessible 2.5" drive bay	
Network activity indicator	Network activity indicator	
Disk activity indicator	Disk activity indicator	
Power State	Power State	
Reset button	Reset button	
Power button	Power button	
USB3.2	6 x USB3.2 Gen2 connector 2 x USB3.2 Gen1 connector	
COM	Serial port connector	D-sub 9-pin, male
VGA	VGA connector	
LAN1~4	4 x RJ-45 Ethernet connector	
MGMT1	MGMT port	
AC-IN	AC power-in connector	

1.5 System Dimensions


1.5.1 1300W ATX PSU

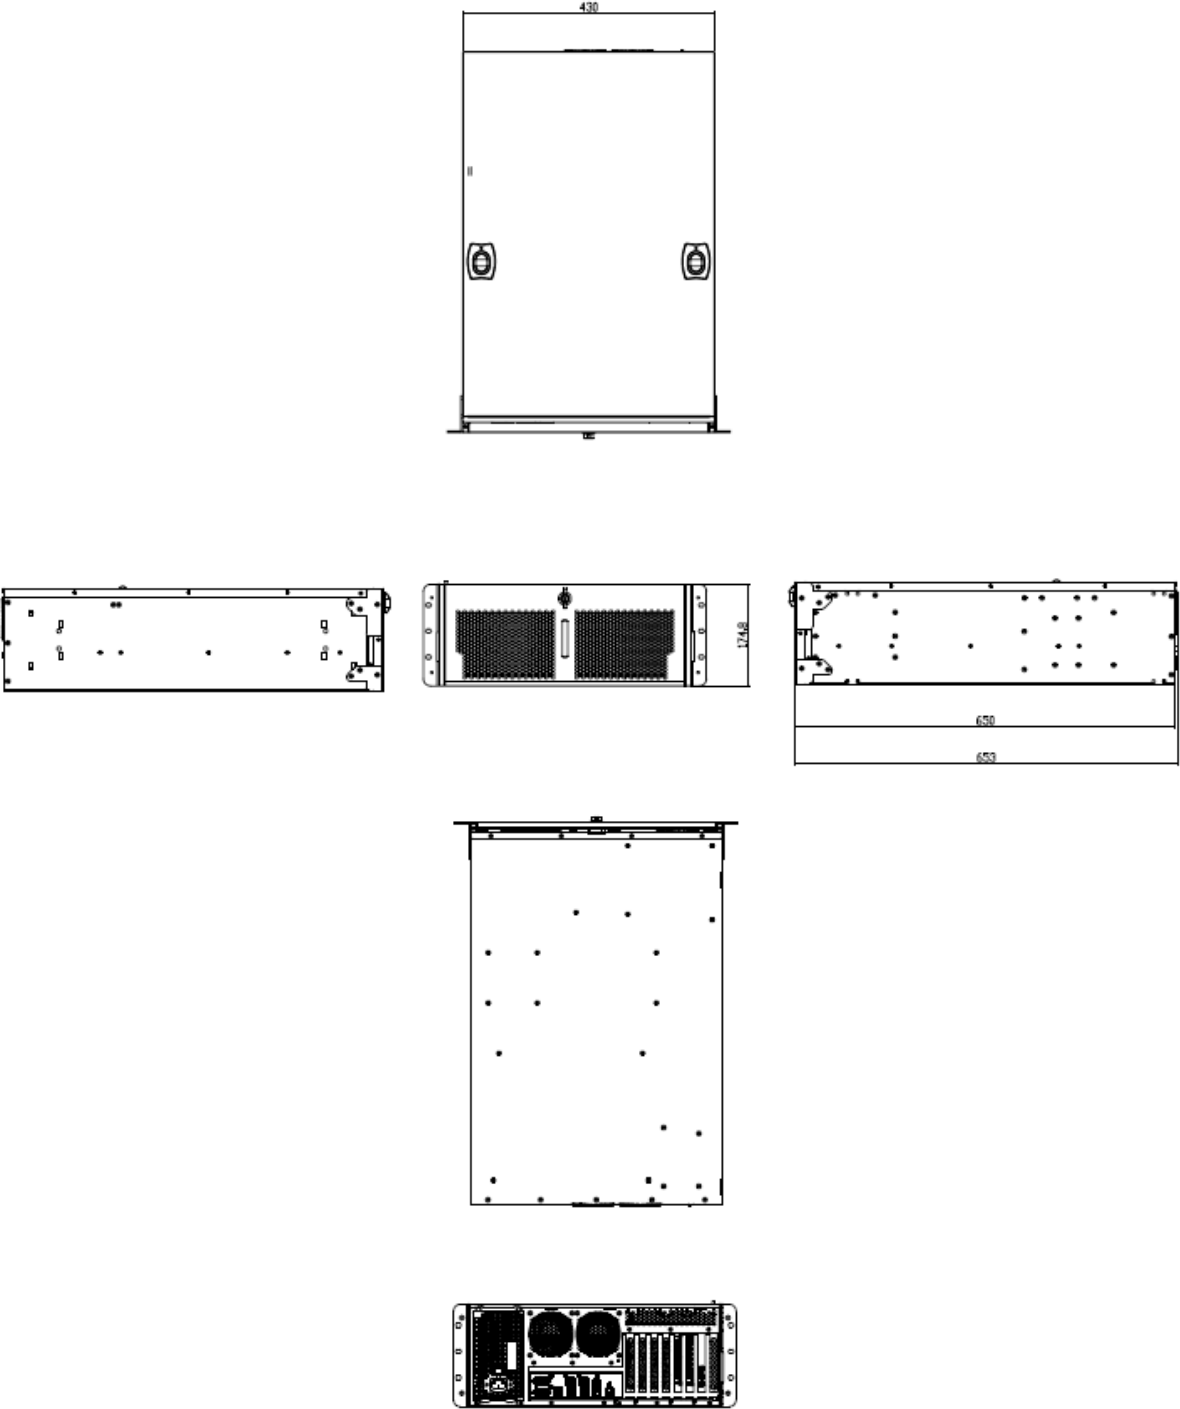

(Unit: mm)

HPS-GNRD4A

1.5.2 1600W CRPS

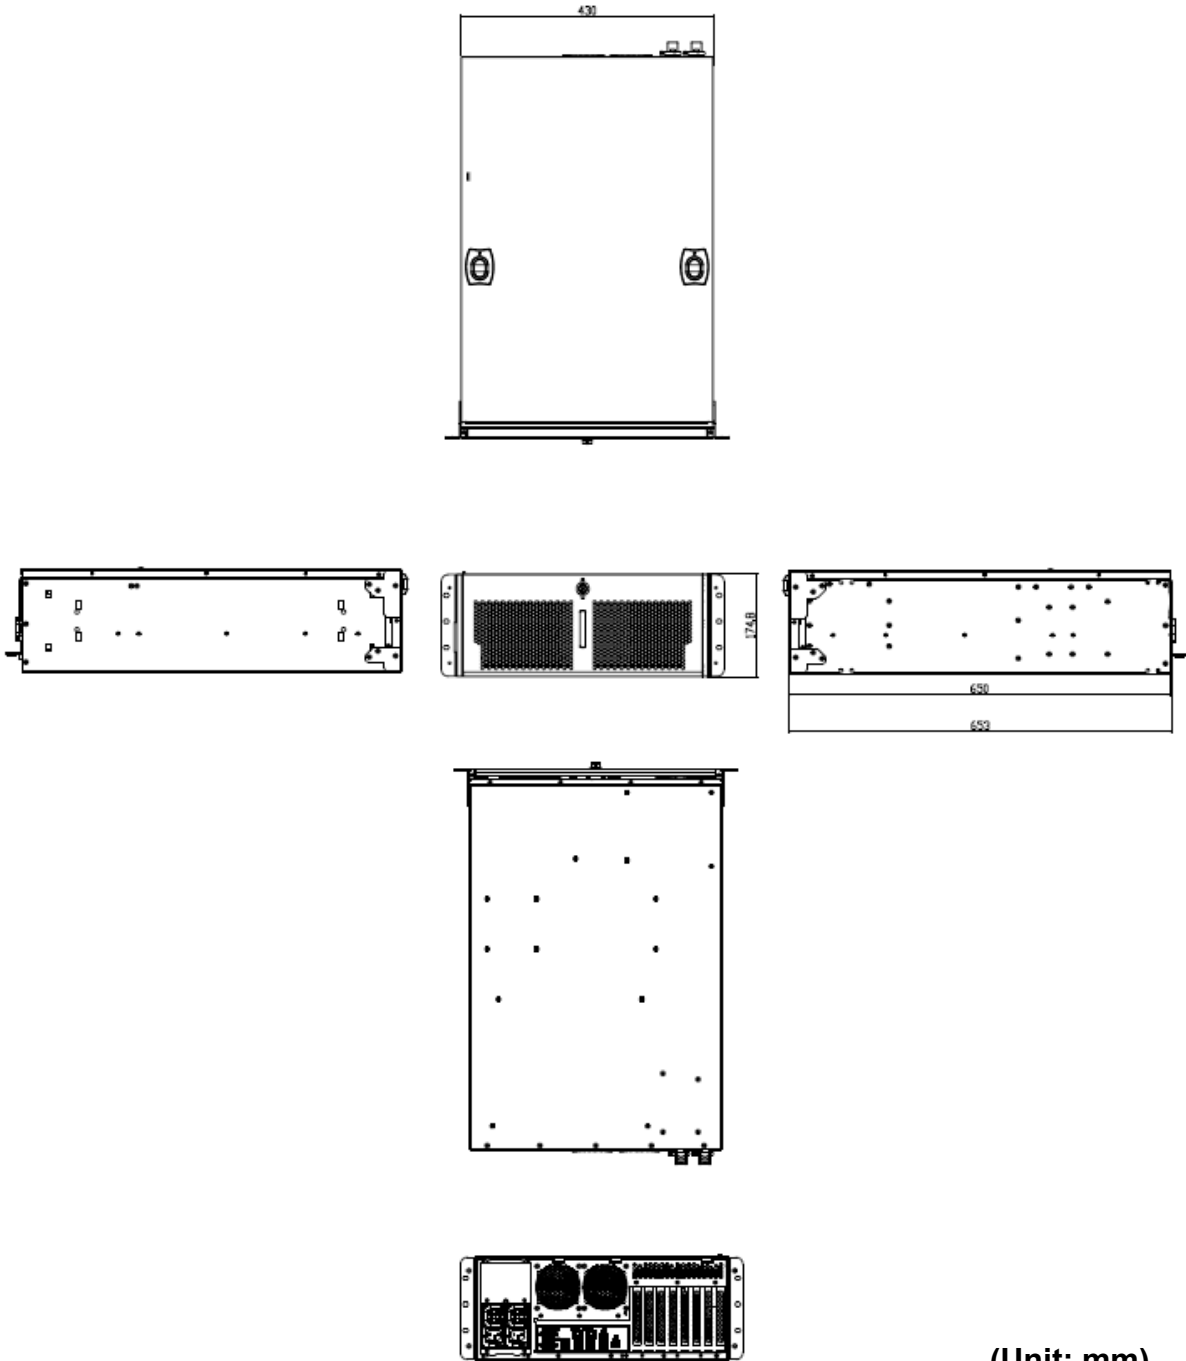

2. Hardware Configuration

Jumper and Connector Setting

For advanced information, please refer to:

- 1- HPM-GNRDE included in this manual.





Note: If you need more information, please visit our website:

www.avalue.com



2.1 HPS-GNRD4A connector mapping

2.1.1 Serial Port connector (COM)




Signal	PIN	PIN	Signal
DCD#	1	6	DSR#
RXD	2	7	RTS#
TXD	3	8	CTS#
DTR#	4	9	RI#
GND	5		

2.1.2 VGA connector (VGA)



PIN	Signal	PIN	Signal	PIN	Signal
1	RED	6	GND	11	NC
2	GREEN	7	GND	12	DDCDAT
3	BLUE	8	GND	13	HSYNC
4	NC	9	+5V	14	VSYSNS
5	GND	10	GND	15	DDCCLK

2.2 HPM-GNRDE Overviews

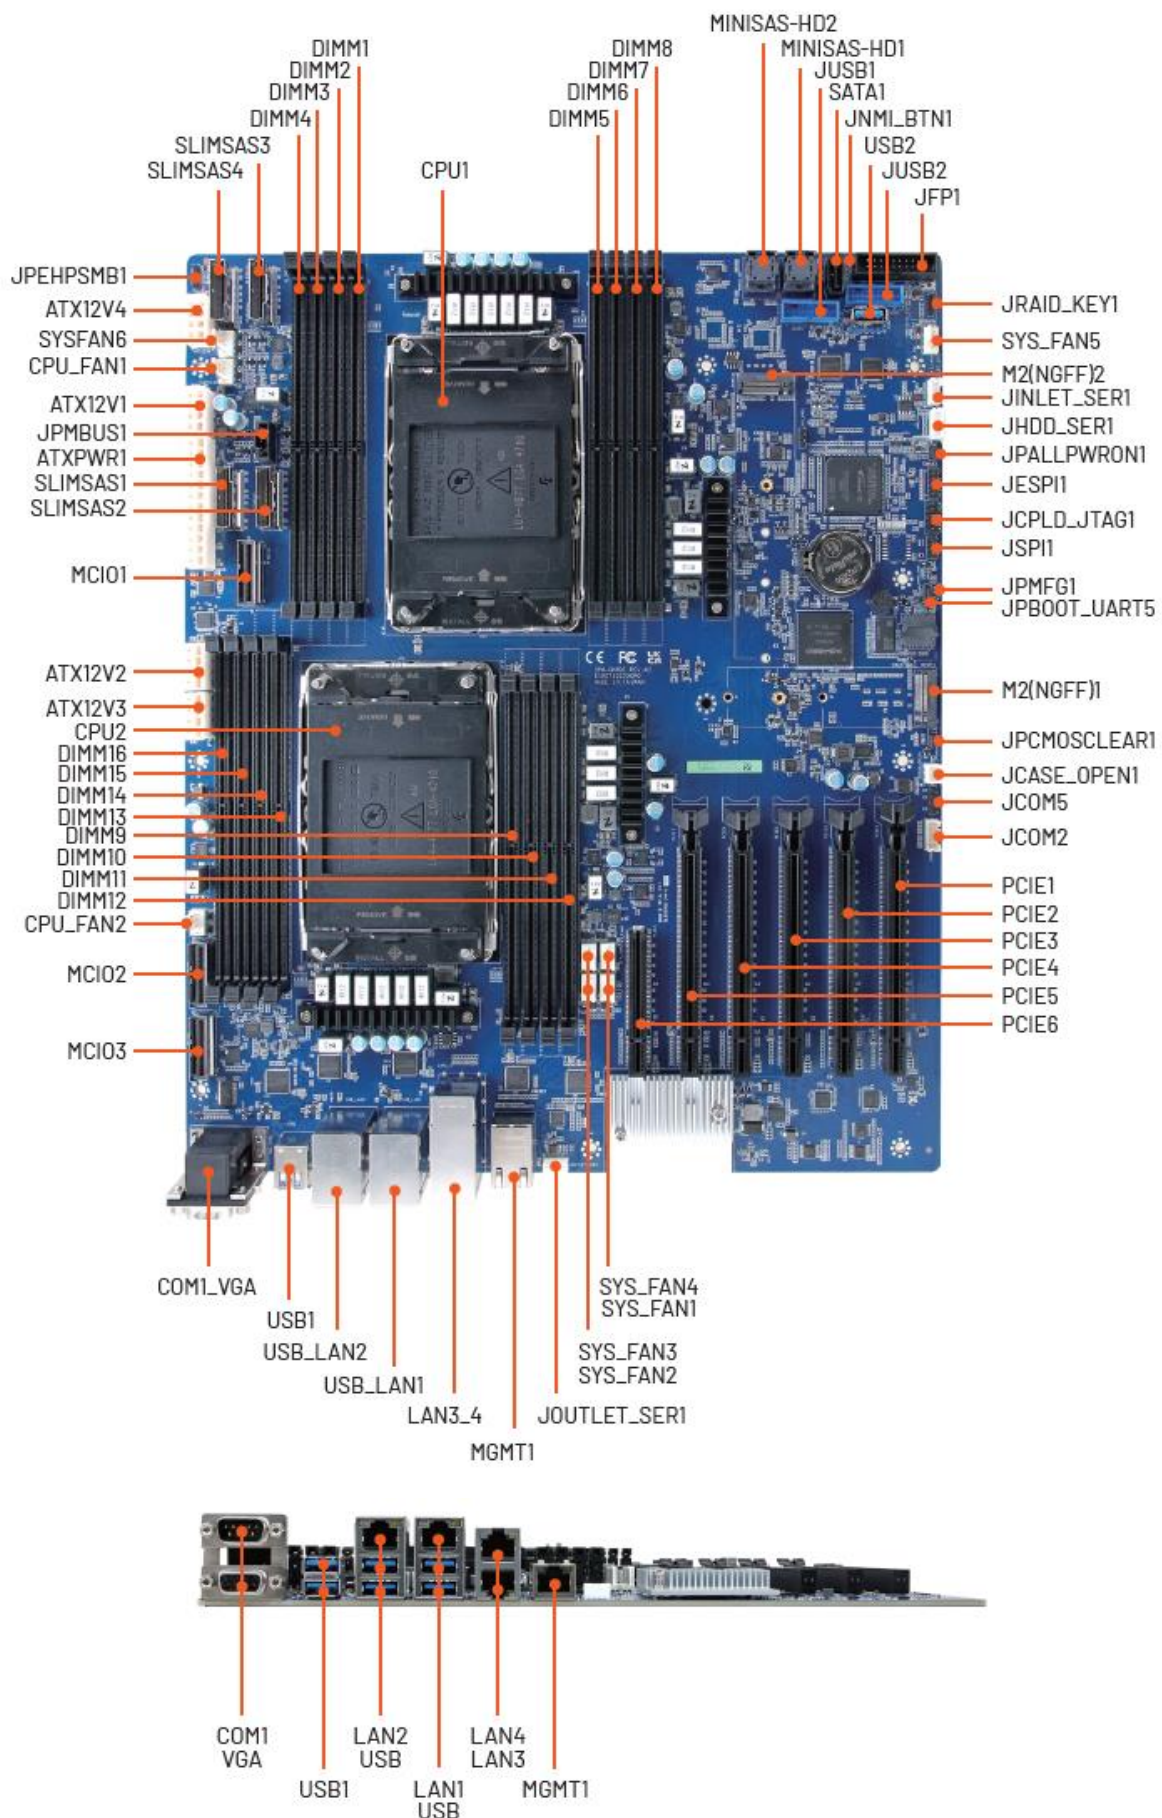

2.3 HPM-GNRDE Jumper & Connector list

Jumpers

Label	Function	Note
JPBOOT_UART5	Boot UART5 setting	3 x 1 header, pitch 2.00mm
JPALLPWRON1	Force PWRON setting	3 x 1 header, pitch 2.00mm
JPCMOSCLEAR1	Clear CMOS	3 x 1 header, pitch 2.00mm


Connectors

Label	Function	Note
SYS_FAN1-6	System fan connector 1-6	4 x 1 wafer, pitch 2.54mm
CPU_FAN1-2	CPU fan connector 1-2	4 x 1 wafer, pitch 2.54mm
VGA_COM1	Serial port 1 connector VGA connector	
JCOM2	Serial port 2 connector	5 x 2 wafer, pitch 2.00mm
JCOM5	BMC_UART5 debug connector	4 x 1 header, pitch 2.54mm
MGMT1	MGMT port	
PCIE1	PCIe Gen5 x16	
PCIE2	PCIe Gen5 x16	
PCIE3	PCIe Gen5 x16	
PCIE4	PCIe Gen5 x16	
PCIE5	PCIe Gen5 x16	
PCIE6	PCIe Gen5 x8 (The slot closest to CPU)	
JFP1	Front Panel connector	10 x 2 wafer, pitch 2.54mm
USB_LAN1	2 x USB3.2 Gen2 connector 1 x RJ-45 Ethernet (LAN1 Share IPMI Port)	
USB_LAN2	2 x USB3.2 Gen2 connector 1 x RJ-45 Ethernet	
LAN3_4	2 x RJ-45 Ethernet	
USB1	2 x USB3.2 Gen2 connector	
USB2	USB3.2 Gen1 connector	
JUSB1	USB3.2 Gen1 connector	10 x 2 wafer, pitch 2.00mm
JUSB2	USB3.2 Gen1 connector	10 x 2 wafer, pitch 2.00mm
JSPI1	SPI connector	4 x 2 header, pitch 2.00mm
JESPI1	ESPI connector	6 x 2 header, pitch 2.00mm
SATA1	Serial ATA connector	


MINISAS-HD1/2	2 x Mini-SAS HD 4i (for 4x SATA Only)	
SLIMSAS1-4	4 x Slim SAS 8i (SFF-8654) connector	
JRAID_KEY1	VROC Header	4 x 1 header, pitch 2.00mm
DIMM1-16	16 x DDR5 RDIMM socket	
JCASE_OPEN1	CASE OPEN connector	2 x 1 wafer, pitch 2.50mm
ATX12V1	ATX 12V power connector 1	4 x 2 wafer, pitch 4.20mm
ATX12V2	ATX 12V power connector 2	4 x 2 wafer, pitch 4.20mm
ATX12V3	ATX 12V power connector 3	4 x 2 wafer, pitch 4.20mm
ATX12V4	ATX 12V power connector 4	4 x 2 wafer, pitch 4.20mm
ATXPWR1	ATX power connector	12 x 2 wafer, pitch 4.20mm
JPMBUS1	Power supply PMBus connector	5 x 1 wafer, pitch 2.54mm
JINLET_SER1	Inlet Thermal Sensor	4 x 1 wafer, pitch 2.00mm
JOUTLET_SER1	Outlet Thermal Sensor	4 x 1 wafer, pitch 2.00mm
JHDD_SER1	HDD Backplane thermal Sensor	5 x 1 wafer, pitch 2.00mm
JPEHPSMB1	CPU PCIE HP SMB connector	5 x 1 header, pitch 2.00mm
JNMI_BTN1	NMI button	3 x 1 header, pitch 2.00mm
M2(NGFF)1/2	2 x M.2 M-Key PCIe 5.0 x4 NVMe SSD	
JCPLD_JTAG1	CPLD JTAG header	5 x 2 header, pitch 2.54mm
MCIO1-3	3 x MCIO x8 connectors (SFF-TA-1016)	
JPMFG1	MFG mode select	3 x 1 header, pitch 2.00mm

2.4 HPM-GNRDE Jumpers & Connectors settings


2.4.1 Force PWRON setting (JPALLPWRON1)

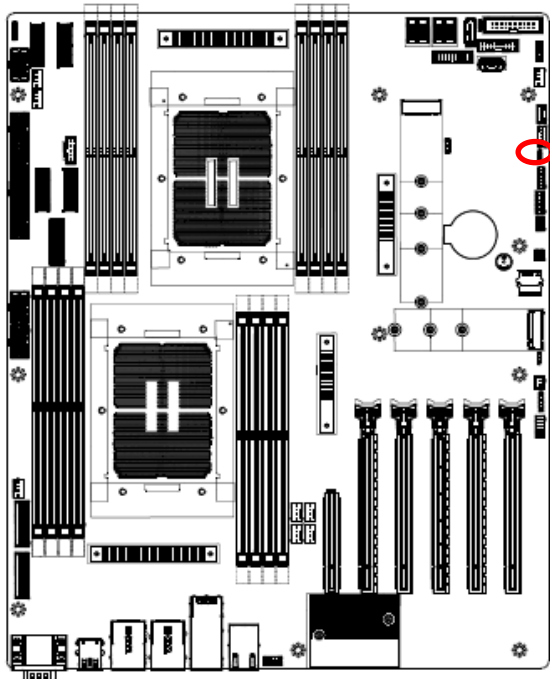

Disable*




Enable




* Default


2.4.2 Clear CMOS (JPCMOSCLEAR1)

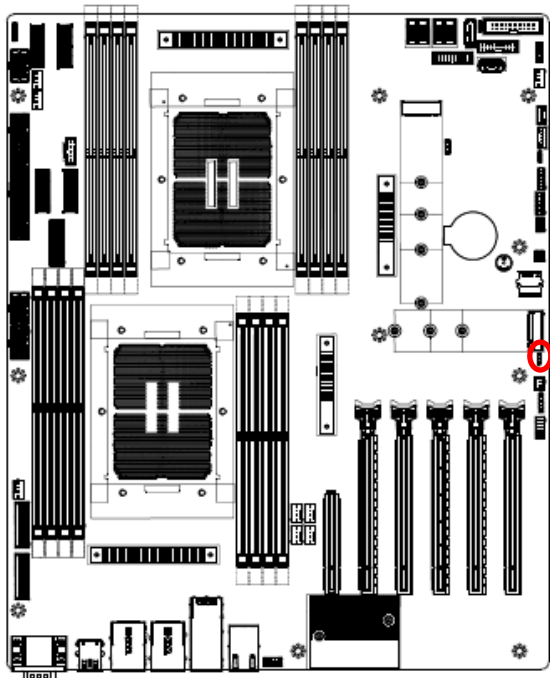

Normal RTC Reset*




Clear RTC REGISTERS




* Default


2.4.3 Boot UART5 setting (JPBOOT_UART5)

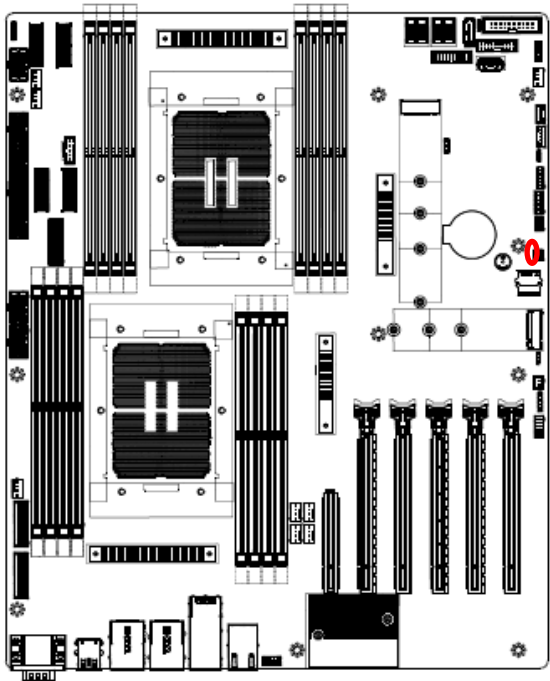

Disable*





Enable BOOT FROM UART5




* Default

2.4.4 CPLD JTAG header (JCPLD_JTAG1)

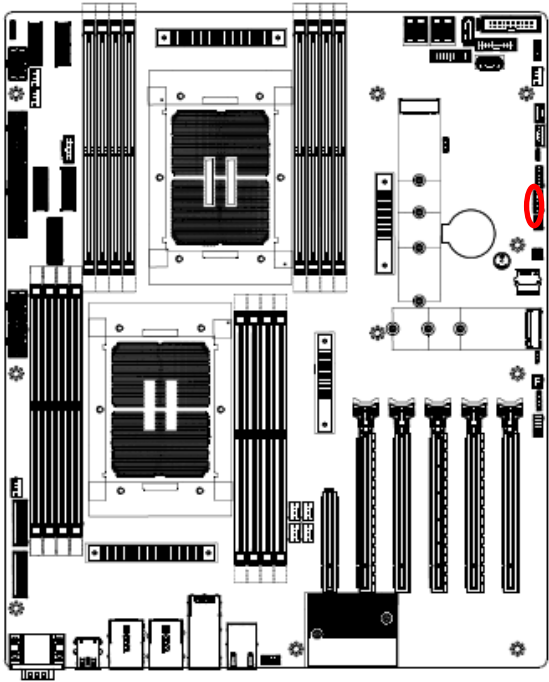


Signal	PIN	PIN	Signal
+3.3VSB	10	9	JTAG_TDI_CONN
NC	8	7	NC
NC	6	5	JTAG_TMS_CONN
+3.3VSB	4	3	JTAG_TDO_CONN
CPLD_JTAG_MUX_CTL	2	1	JTAG_TCK_CONN

2.4.5 System fan connector 1 (SYS_FAN1)

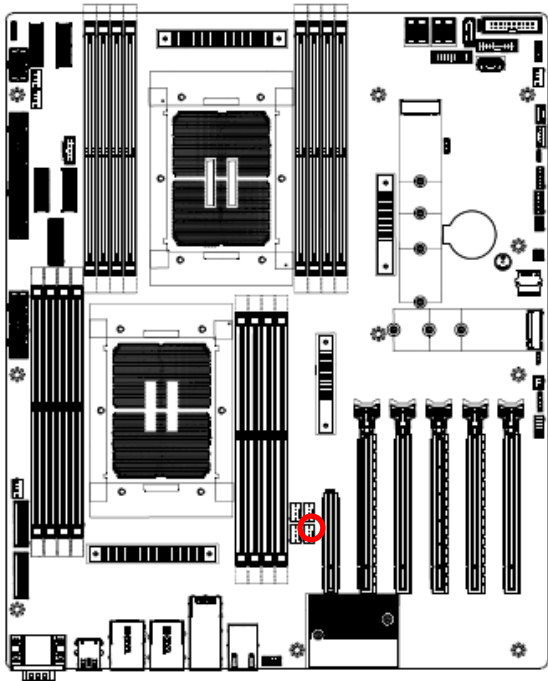



Signal	PIN
SYS_PWM1	4
FAN_R2_TACH1	3
+12V	2
GND	1

2.4.6 System fan connector 2 (SYS_FAN2)

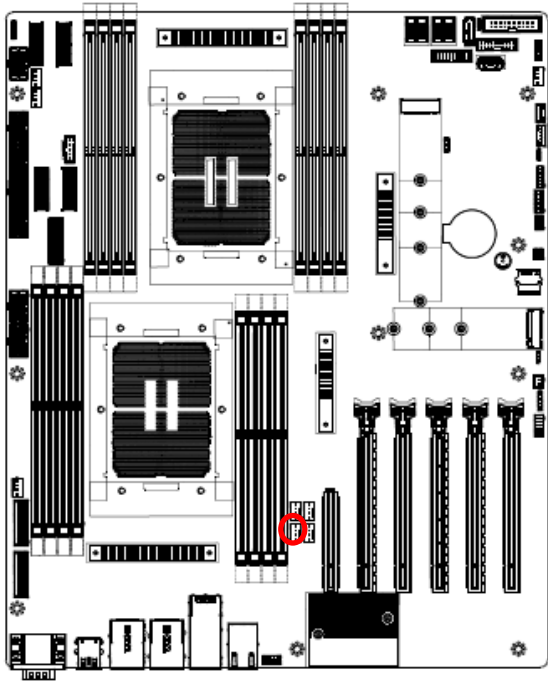



Signal	PIN
SYS_PWM2	4
FAN_R2_TACH2	3
+12V	2
GND	1

2.4.7 System fan connector 3 (SYS_FAN3)

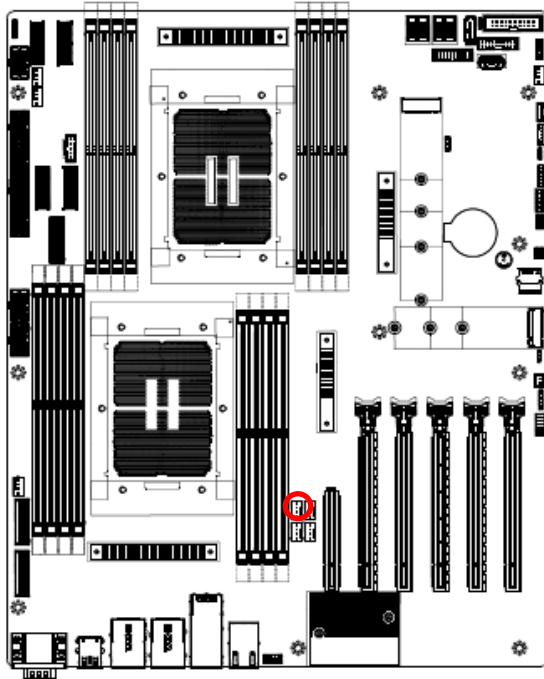



Signal	PIN
SYS_PWM3	4
FAN_R2_TACH3	3
+12V	2
GND	1

2.4.8 System fan connector 4 (SYS_FAN4)

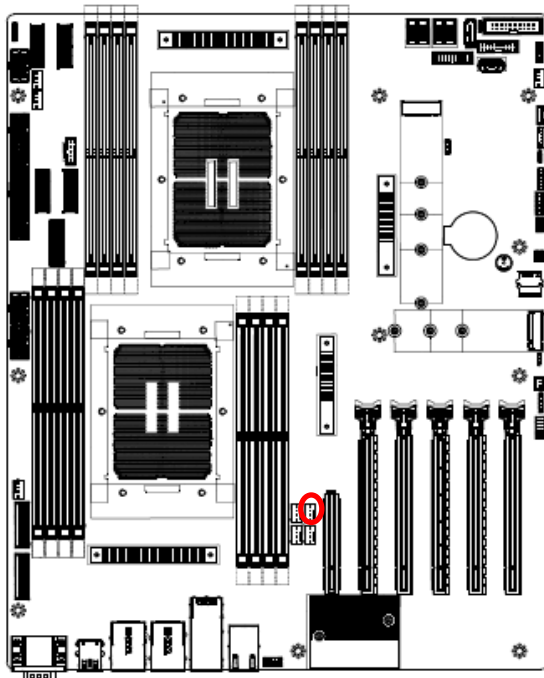



Signal	PIN
SYS_PWM4	4
FAN_R2_TACH4	3
+12V	2
GND	1

2.4.9 System fan connector 5 (SYS_FAN5)

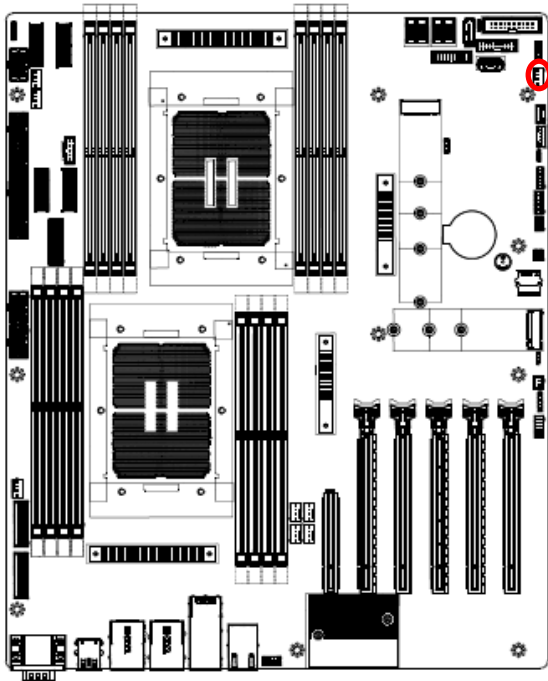



Signal	PIN
GND	1
+12V	2
FAN_R2_TACH5	3
SYS_PWM5	4

2.4.10 System fan connector 6 (SYS_FAN6)

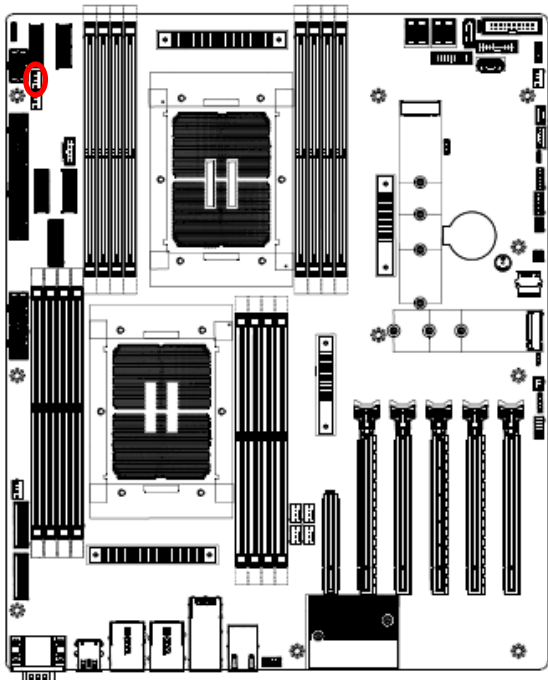



Signal	PIN
GND	1
+12V	2
FAN_R2_TACH6	3
SYS_PWM6	4

2.4.11 CPU fan connector 1 (CPU_FAN1)

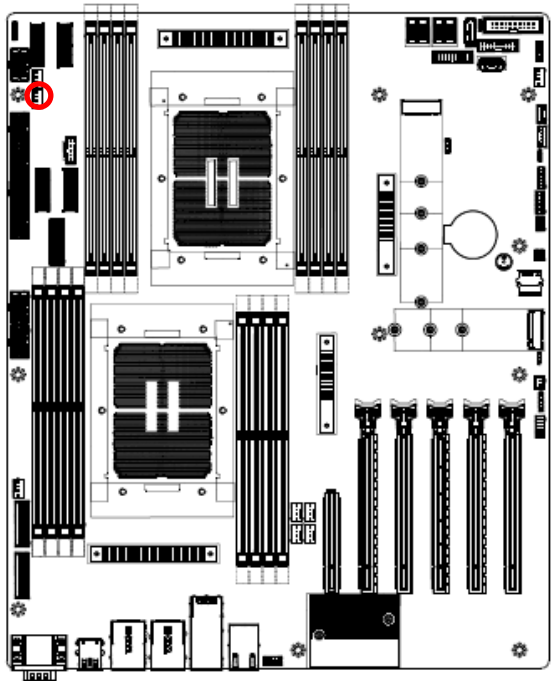



Signal	PIN
GND	1
+12V	2
FAN_R2_TACH0	3
CPU0_PWM	4

2.4.12 CPU fan connector 2 (CPU_FAN2)

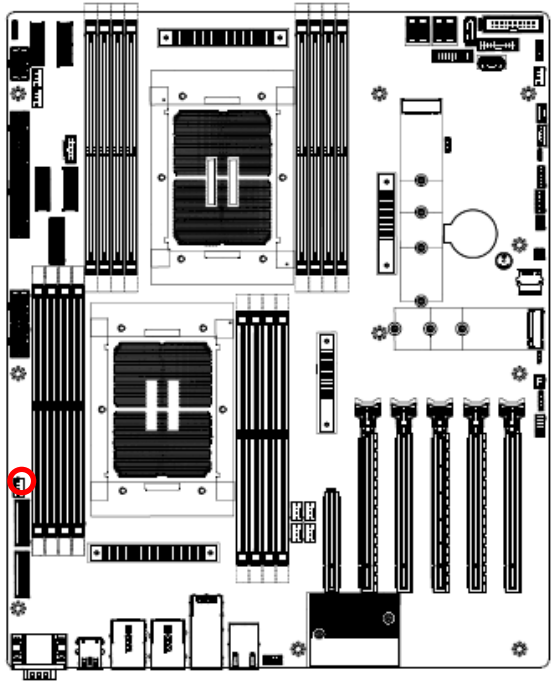



Signal	PIN
GND	1
+12V	2
FAN_R2_TACH7	3
CPU1_PWM	4

2.4.13 SPI connector (JSPI1)

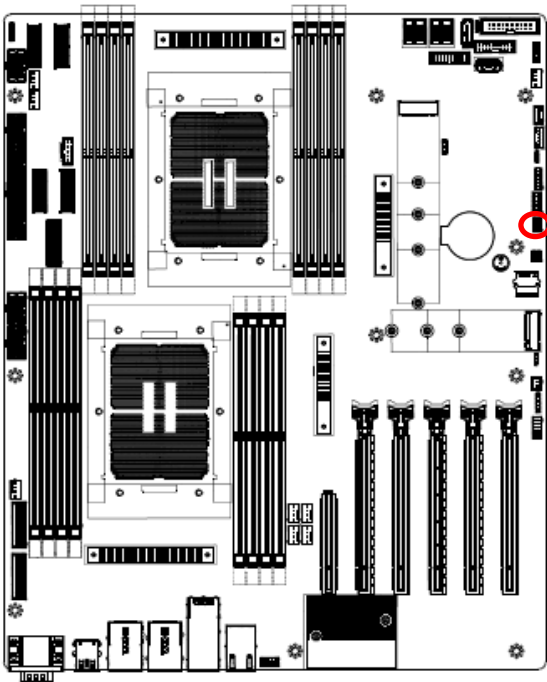


Signal	PIN	PIN	Signal
SPI_DED_IO2	8	7	SPI_DED_IO3
SPI_DED_MOSI	6	5	SPI_DED_MISO
SPI_DED_CLK	4	3	SPI_DED_CS0_N
GND	2	1	ON_BIOS_SPI_VCC

2.4.14 Serial port 2 connector (JCOM2)

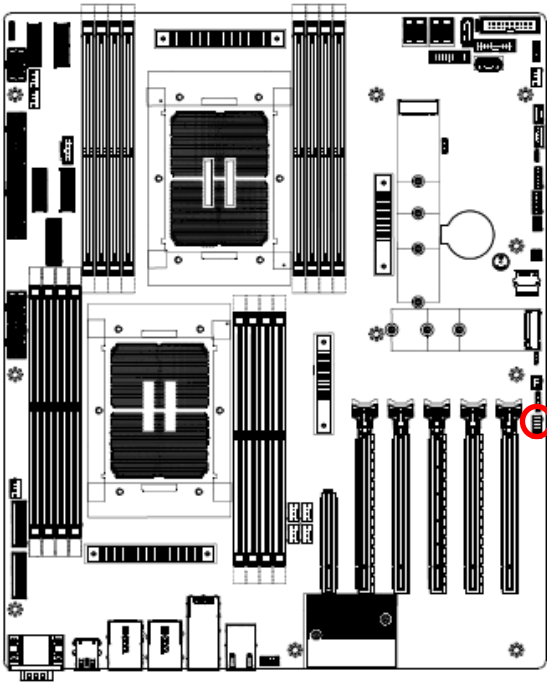



Signal	PIN	PIN	Signal
COM_RXD2	2	1	COM_DCD#2
COM_DTR#2	4	3	COM_TXD2
COM_DSR#2	6	5	GND
COM_CTS#2	8	7	COM_RTS#2
NC	10	9	COM_RI#2

2.4.15 BMC_UART5 debug connector (JCOM5)

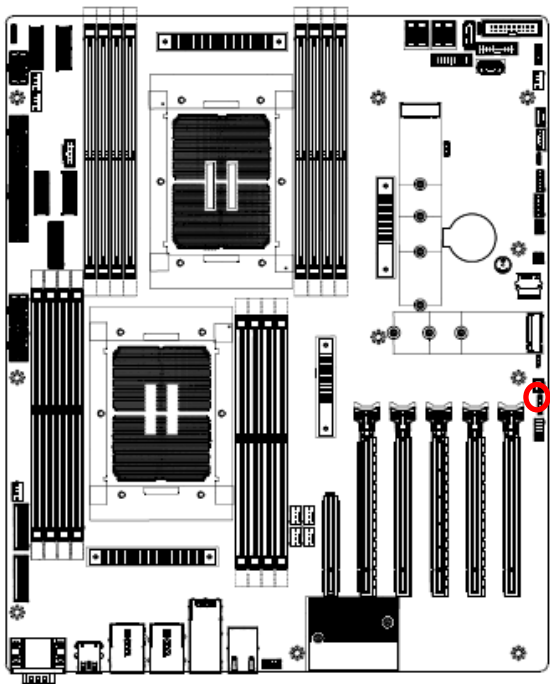



Signal	PIN
UART5_TX	1
UART5_RX	2
GND	3
+3.3VSB	4

2.4.16 ATX 12V power connector 1 (ATX12V1)

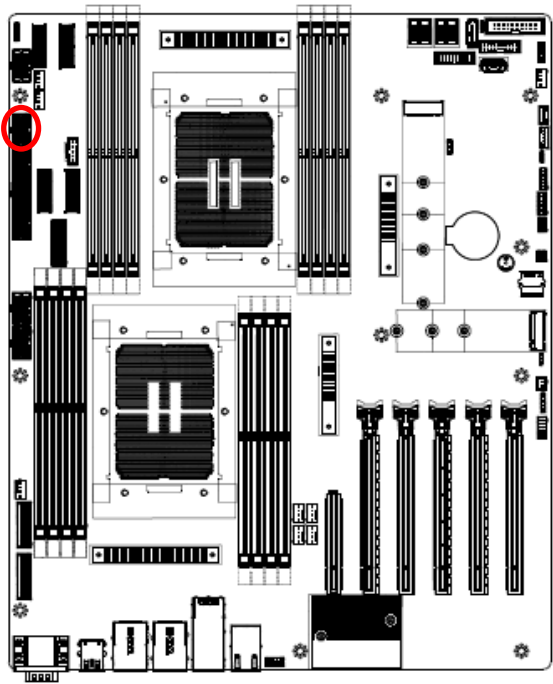



Signal	PIN	PIN	Signal
+12V	5	1	GND
+12V	6	2	GND
+12V	7	3	GND
+12V	8	4	GND

2.4.17 ATX 12V power connector 2 (ATX12V2)

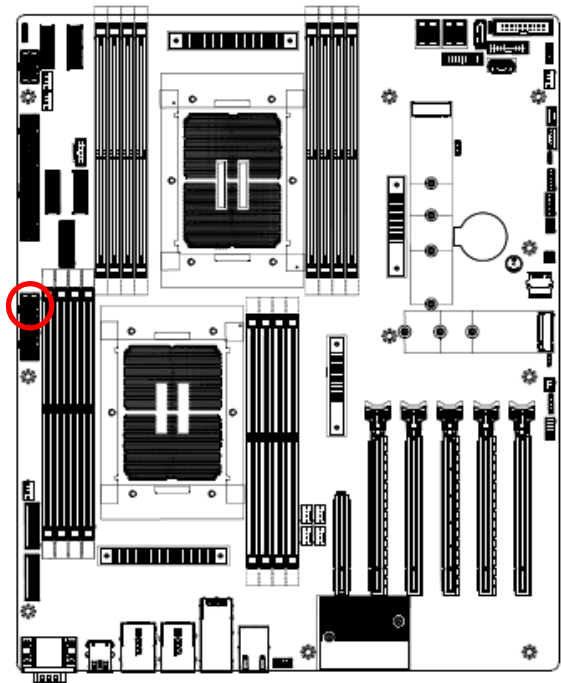



Signal	PIN	PIN	Signal
+12V	5	1	GND
+12V	6	2	GND
+12V	7	3	GND
+12V	8	4	GND

2.4.18 ATX 12V power connector 3 (ATX12V3)

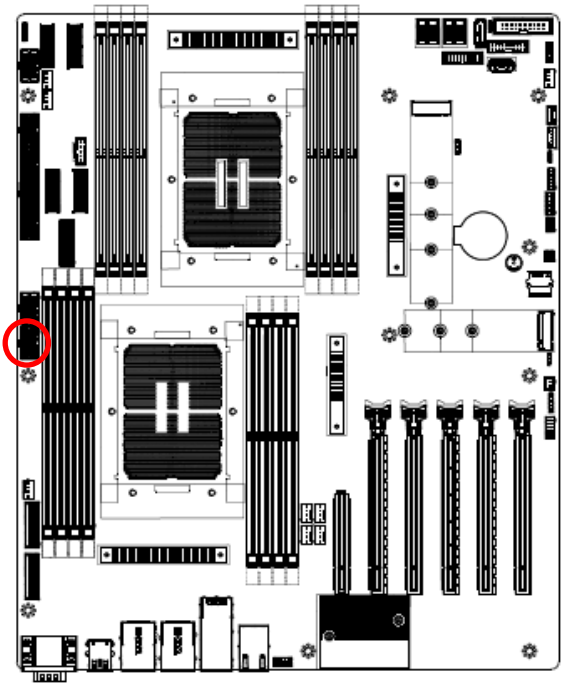



Signal	PIN	PIN	Signal
+12V	5	1	GND
+12V	6	2	GND
+12V	7	3	GND
+12V	8	4	GND

2.4.19 ATX 12V power connector 4 (ATX12V4)

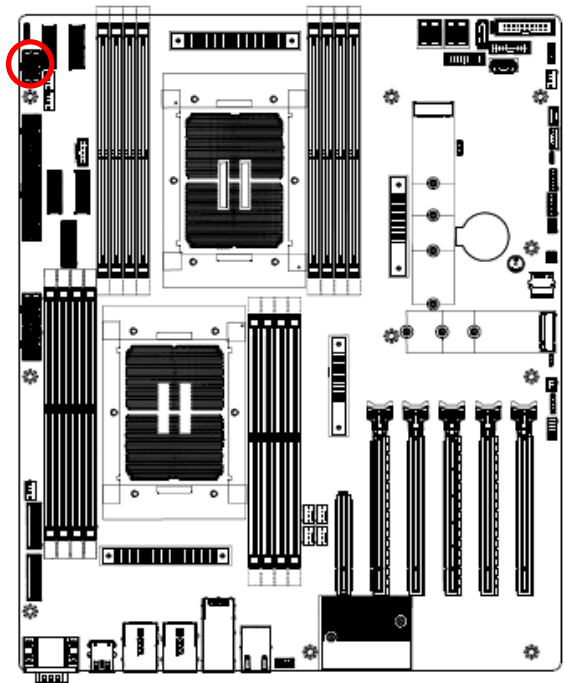



Signal	PIN	PIN	Signal
+12V	5	1	GND
+12V	6	2	GND
+12V	7	3	GND
+12V	8	4	GND

2.4.20 ATX power connector (ATXPWR1)

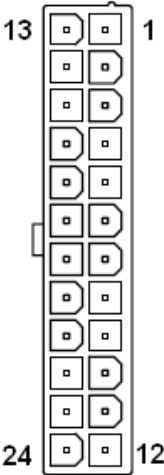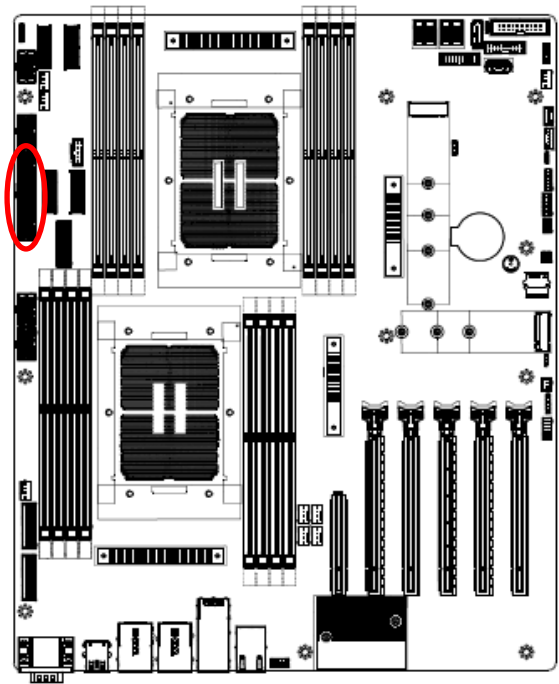



Signal	PIN	PIN	Signal
+3.3V	13	1	+3.3V
-12V	14	2	+3.3V
GND	15	3	GND
FM_PS_EN_ PSU_N	16	4	+5V
GND	17	5	GND
GND	18	6	+5V
GND	19	7	GND
NC	20	8	PWRGD_PS_ PWROK_R
+5V	21	9	+V5SB
+5V	22	10	+12V
+5V	23	11	+12V
GND	24	12	+3.3V

2.4.21 Power supply PMBus connector (JPMBUS1)

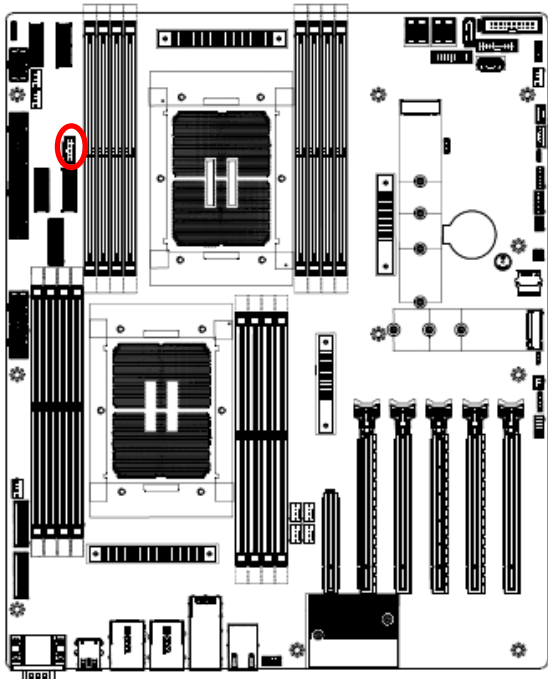



Signal	PIN
PSU_z_SCL	1
PSU_z_SDA	2
PSU_ALERT_z_N	3
GND	4
NC	5

2.4.22 USB3.1 Gen1 connector (JUSB1)

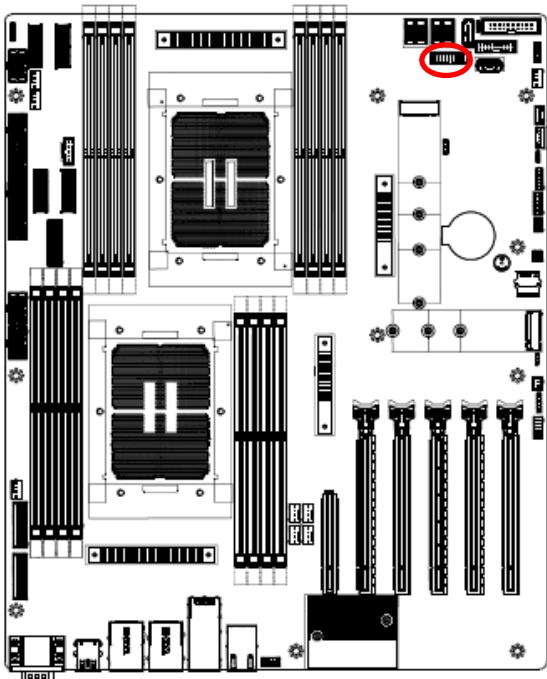



Signal	PIN	PIN	Signal
		1	+V5S_USB_FRONT1
+V5S_USB_FRONT1	19	2	USB3_z_RN6
USB3_z_RN7	18	3	USB3_z_RP6
USB3_z_RP7	17	4	GND
GND	16	5	USB3_z_TN6
USB3_z_TN7	15	6	USB3_z_TP6
USB3_z_TP7	14	7	GND
GND	13	8	USB_z_PN6
USB_z_PN7	12	9	USB_z_PP6
USB_z_PP7	11	10	FRONTUSB3_OC1_N

2.4.23 USB3.1 Gen1 connector (JUSB2)

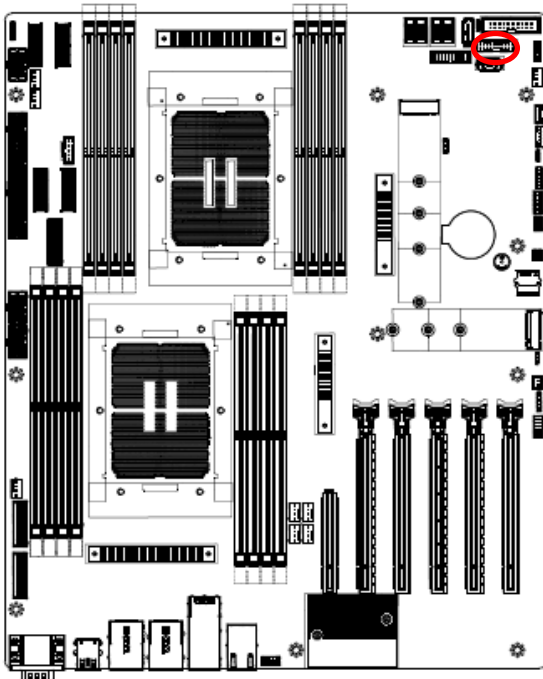



Signal	PIN	PIN	Signal
		1	+V5S_USB_FRONT2
+V5S_USB_FRONT2	19	2	USB3_z_RN8
USB3_z_RN9	18	3	USB3_z_RP8
USB3_z_RP9	17	4	GND
GND	16	5	USB3_z_TN8
USB3_z_TN9	15	6	USB3_z_TP8
USB3_z_TP9	14	7	GND
GND	13	8	USB_z_PN8
USB_z_PN9	12	9	USB_z_PP8
USB_z_PP9	11	10	FRONTUSB3_OC2_N

2.4.24 Front Panel connector (JFP1)

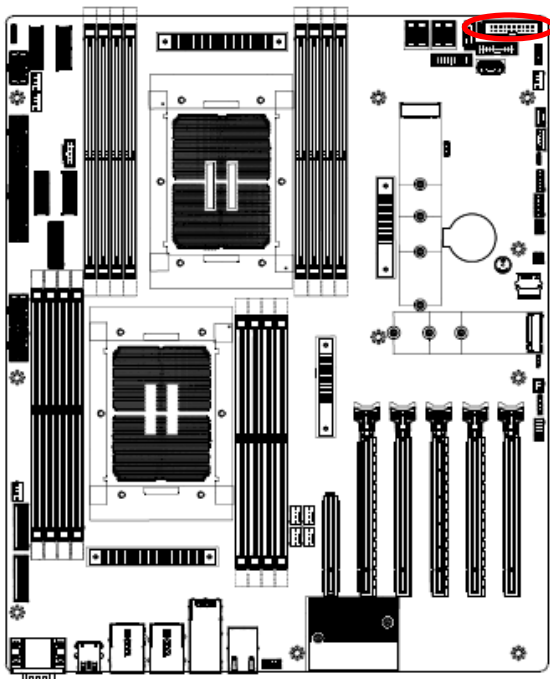



Signal	PIN	PIN	Signal
+3.3VSB	2	1	HDD_LED_P
PWRLED_R_N	4	3	LED_HDD_ACTIVITY_B_N
FP_PWR_BTN_N_R	6	5	FP_RST_BTN_N_R
GND	8	7	GND
LAN1_FRONT_LED_ACT_P	10	9	STATUS_LED_P
LAN1_LED_ACT_N	12	11	STATUS_LED_N
SBPWRLED_P	14	13	FRONT_UID_LED_N
GND	16	15	FRONT_UID_LED_P
LAN2_FRONT_LED_ACT_P	18	17	FP_UID_BTN_N_R
LAN2_LED_ACT_N	20	19	GND

2.4.25 Inlet Thermal Sensor (JINLET_SER1)

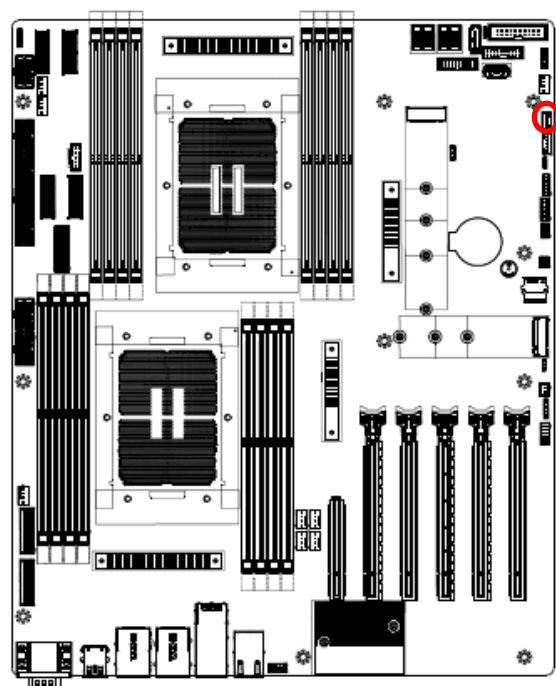



Signal	PIN
+3.3VSB	4
SMB_INLET_TEMPSSENSOR_SDA	3
SMB_INLET_TEMPSSENSOR_SCL	2
GND	1

2.4.26 Outlet Thermal Sensor (JOUTLET_SER1)

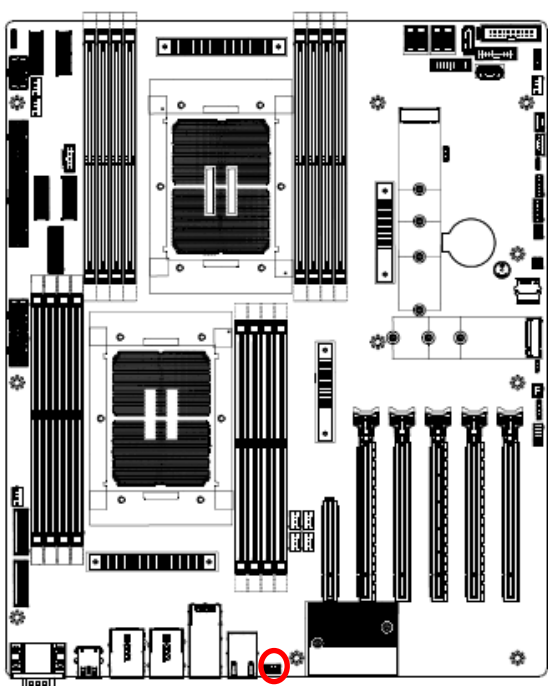


Signal	PIN
GND	1
SMB_OUTLET_TEMPSSENSOR_SCL	2
SMB_OUTLET_TEMPSSENSOR_SDA	3
+3.3VSB	4

2.4.27 HDD Backplane thermal Sensor (JHDD_SER1)

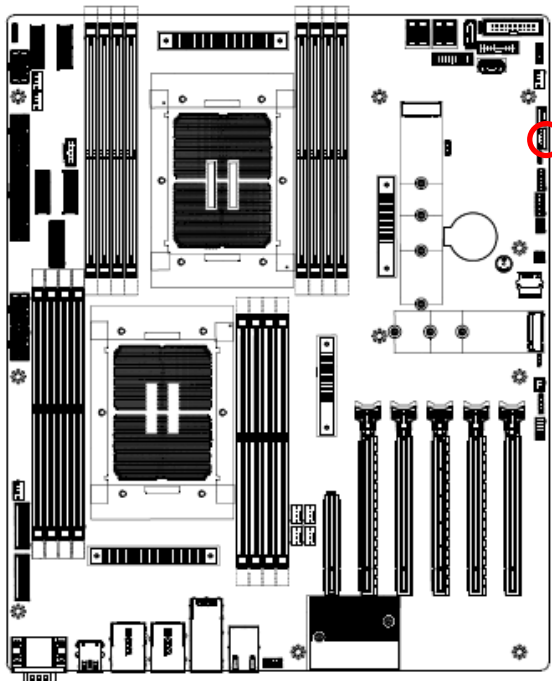


Signal	PIN
SSD_LED_N	1
GND	2
SMB_HDBP_TEMPSENSOR_SCL	3
SMB_HDBP_TEMPSENSOR_SDA	4
+3.3VSB	5

2.4.28 CASE OPEN connector (JCASE_OPEN1)

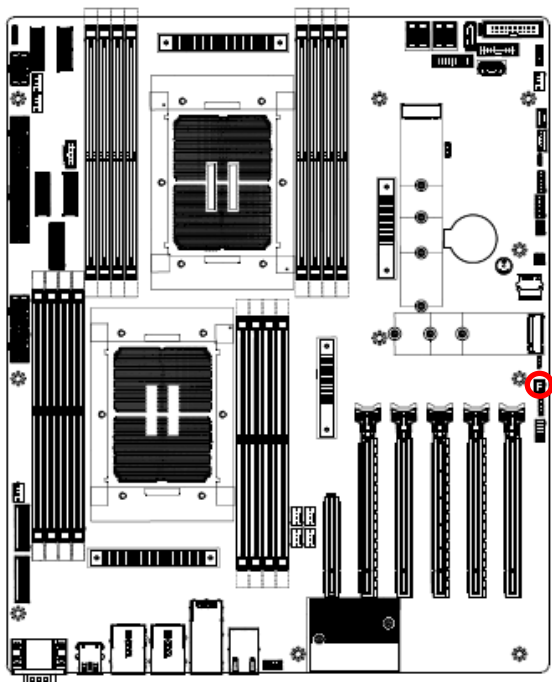



Signal	PIN
FP_CHASSIS_INTRUSION	1
GND	2

2.4.29 VROC Header (JRAID_KEY1)

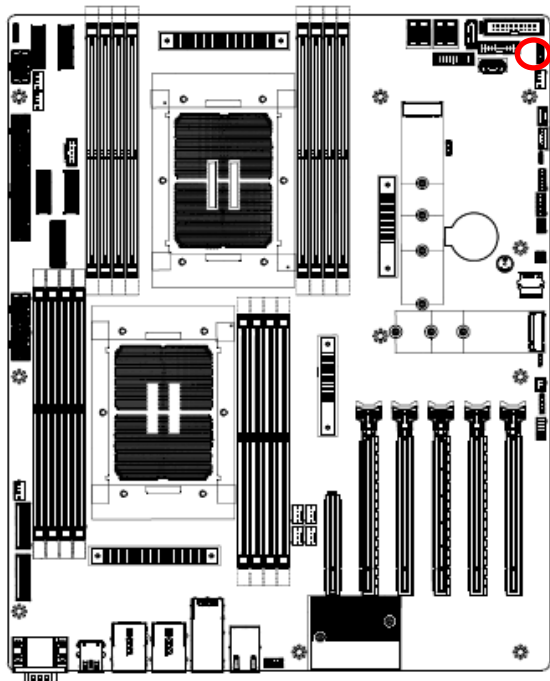



Signal	PIN
GND	1
PU_VROC_HW_KEY_CONN_PIN2_R	2
GND	3
PU_VROC_HW_KEY_R_LVC3	4

2.4.30 CPU PCIE HP SMB connector (JPEHPSMB1)

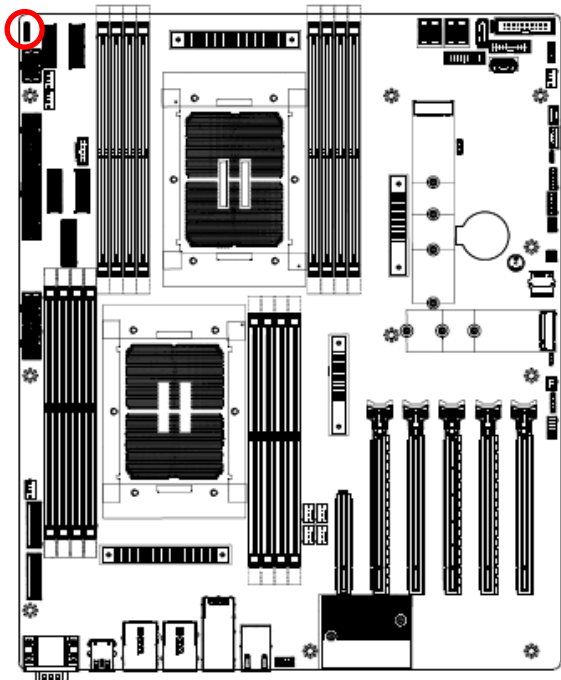



Signal	PIN
FM_SMB_CPU0_ALERT_N	5
GND	4
SMB_PEHPCPU0_LVC3_SDA	3
GND	2
SMB_PEHPCPU0_LVC3_SCL	1

2.4.31 ESPI connector (JESPI1)

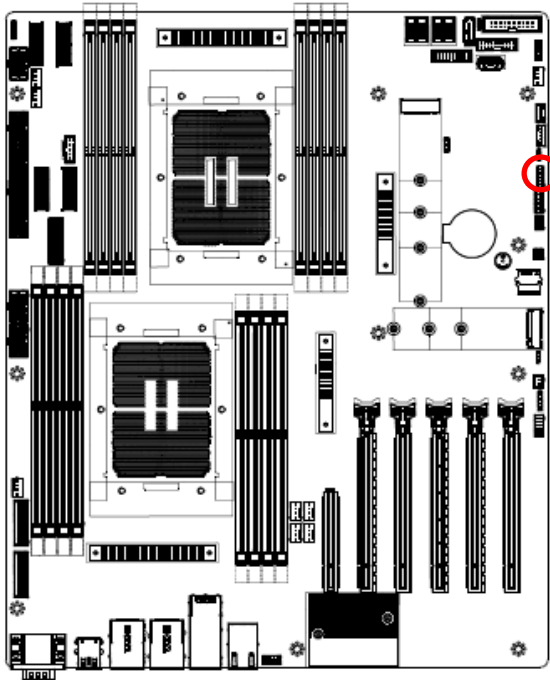

Signal	PIN	PIN	Signal
ESPI_CONN_ALERT_P1V8_N	12	11	ESPI_CONN_RESET_P1V8_N
GND	10	9	NC
ESPI_CONN_CLK_P1V8	8	7	ESPI_CONN_D3_P1V8
ESPI_CPU0_CS_HDR_N	6	5	ESPI_CONN_D2_P1V8
RST_PLTRST_LPC_HEADER_N	4	3	ESPI_CONN_D1_P1V8
+3.3VSB	2	1	ESPI_CONN_D0_P1V8

2.4.32 NMI button (JNMI_BTN1)

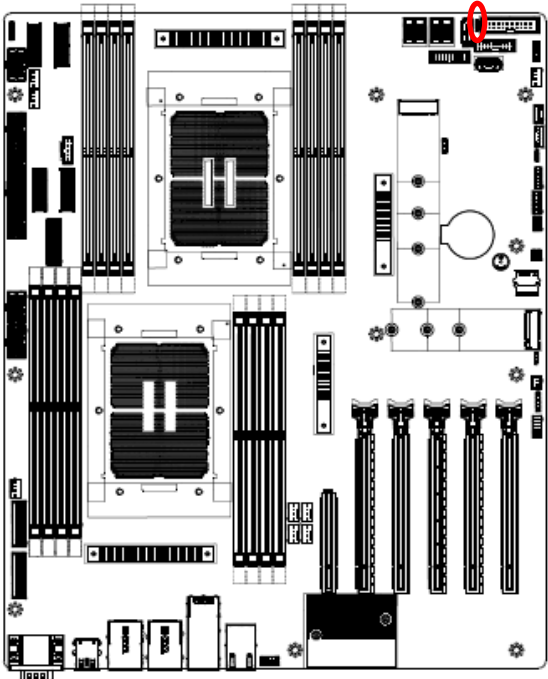

Signal	PIN
GND	3
FP_NMI_BTN_N_R	2
NC	1

3. Drivers Installation

All the drivers are available on Avalue Downloads Area (<https://www.avalue.com/en/support/download>). Type the model name and press Enter to find all the relevant software, utilities, and documentation.

Chipset 1Audio 2Graphics 1LAN 1Other Driver 3ME 1

Chipset

Total 1 Files

No.	Release Date	Title, Description	Operating System	Download
01	2025-05-09	Intel MTL Chipset driver 10.1.19627.8423 Intel MTL Chipset driver 10.1.19627.8423	Windows 11 64bit	

Audio

Total 2 Files

No.	Release Date	Title, Description	Operating System	Download
01	2025-05-09	Realtek Audio Driver 9721.1 Realtek Audio Driver 9721.1	Windows 11 64bit	
02	2025-05-09	Intel(R)_SST_MTL_v20.40.10915.2 Intel(R)_SST_MTL_v20.40.10915.2	Windows 11 64bit	

(For reference only)



Note: Installation procedures and screen shots in this section are for your reference and may not be exactly the same as shown on your screen.

3.1 Install Chipset Driver

All drivers can be found on the Avalue Official Website:

www.avalue.com.



Note: The installation procedures and screen shots in this section are based on Windows 11 operation system. If the warning message appears while the installation process, click Continue to go on.




Step 3. Click Install.



Step1. Click Next.



Step 4. Click Finish to complete setup.

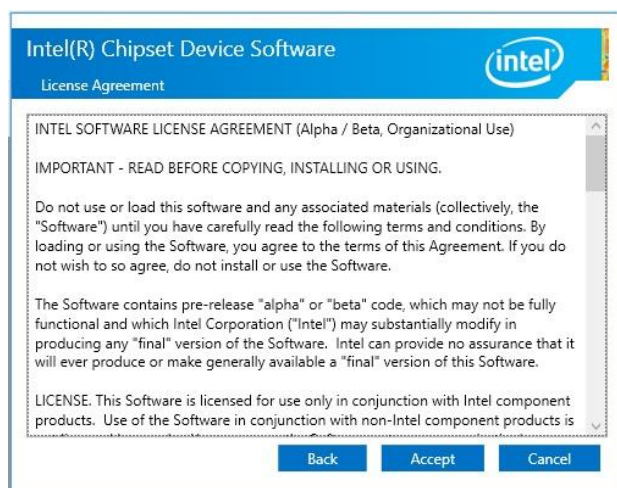


Step 2. Click Accept.

3.2 Install VGA Driver

All drivers can be found on the Avalue Official Website:
www.avalue.com.




Note: The installation procedures and screen shots in this section are based on Windows 11 operation system.

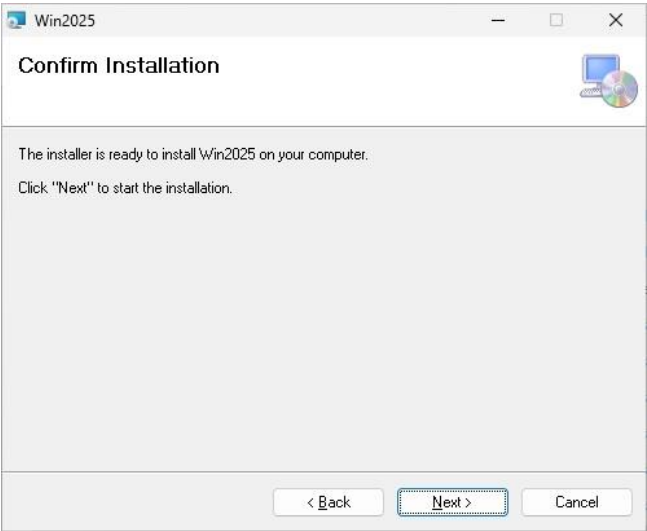


Step 3. Click Next.



Step 1. Click Next to continue installation.

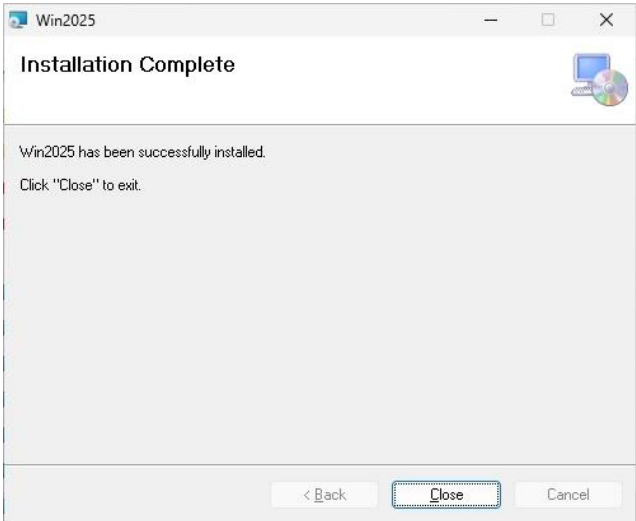

Step 4. Setup completed.

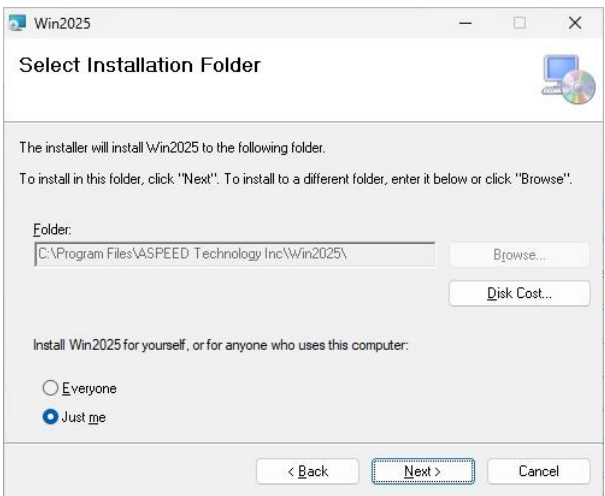

Step 2. Click Next.


3.3 Install Ethernet Driver

All drivers can be found on the Avalue Official Website:


www.avalue.com.



Note: The installation procedures and screen shots in this section are based on Windows 11 operation system.

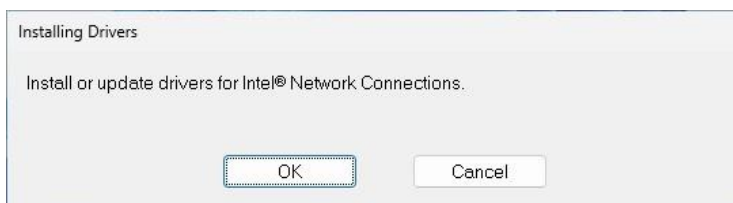

Step 1. Click **OK** to continue installation.

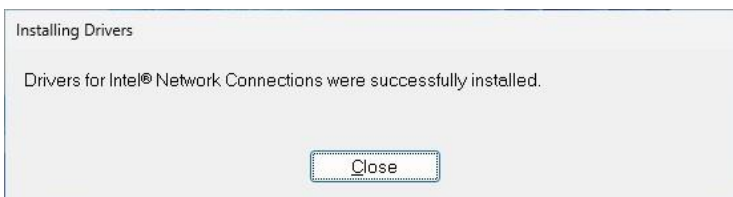

Step 2. Setup completed.

3.4 Install QuickAssist Technology Driver

All drivers can be found on the Avalue Official Website:

www.avalue.com.



Note: The installation procedures and screen shots in this section are based on Windows 11 operation system.



Step 3. Click Next.




Step 1. Click Next to continue installation.



Step 4. Click Install.



Step 2. Click Next.

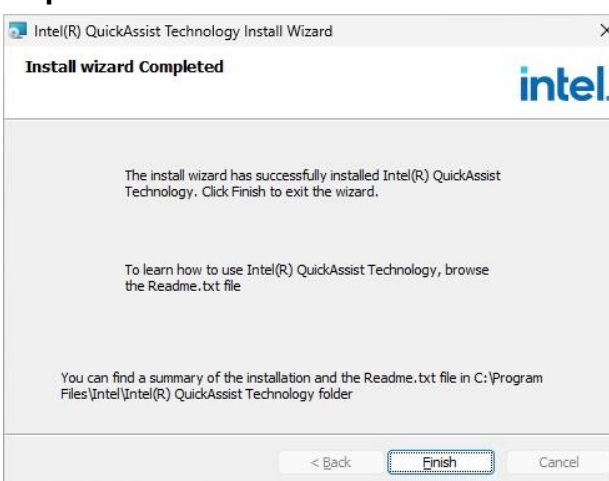

Step 5. Click Finish to complete setup.

3.5 Install VROC Driver

All drivers can be found on the Avalue Official Website:


www.avalue.com.




Note: The installation procedures and screen shots in this section are based on Windows 11 operation system.



Step 3. Click Accept.

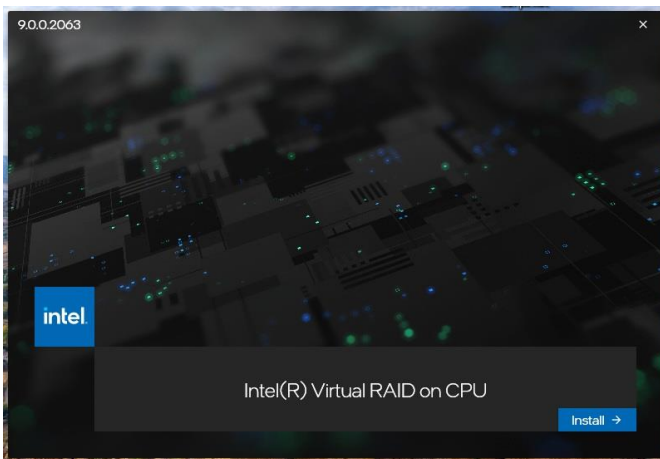


Step 1. Click Install to continue installation.

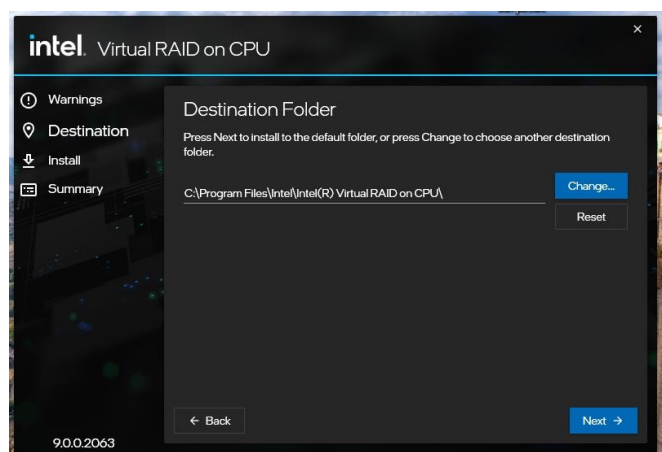

Step 4. Click Next.



Step 2. Click Next.

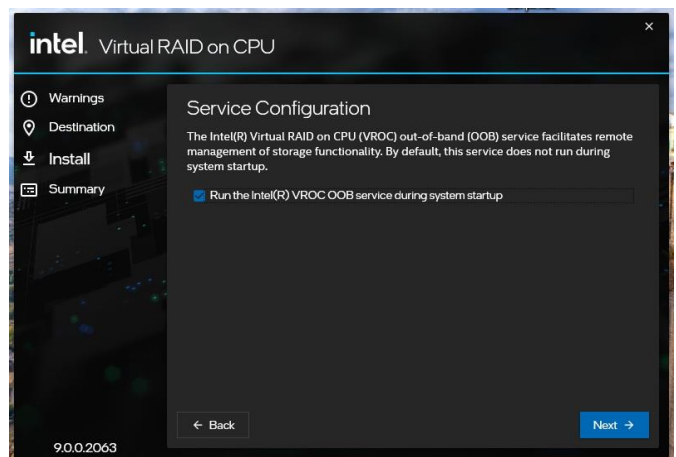


Step 5. Click Next.


HPS-GNRD4A



Step 6. Click Install.

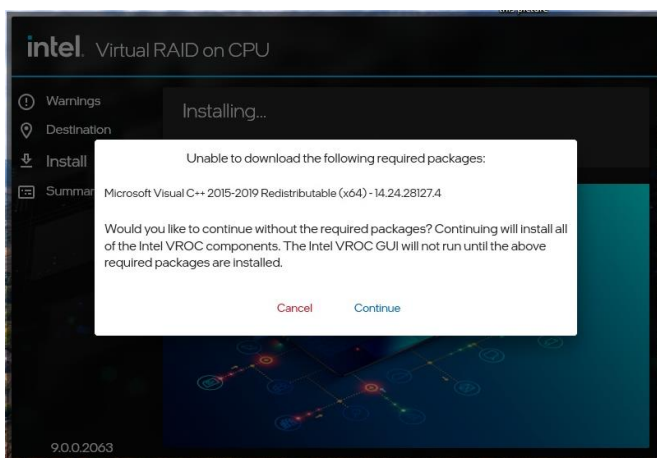

Step 7. Click Continue.

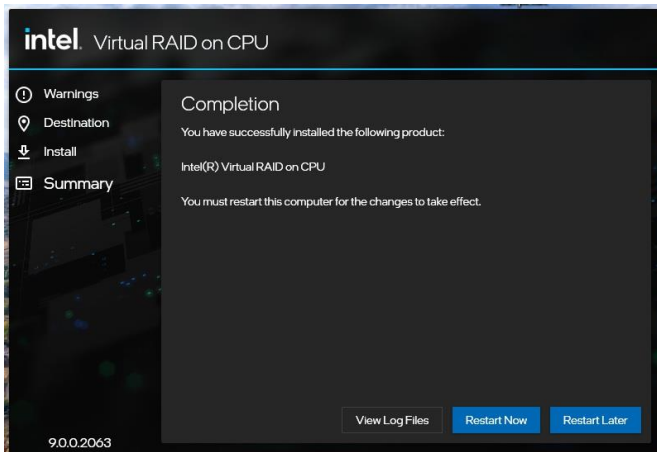

Step 8. Setup completed.

4.BIOS Setup

4.1 Introduction

The BIOS setup program allows users to modify the basic system configuration. In this following chapter will describe how to access the BIOS setup program and the configuration options that may be changed.

4.2 Starting Setup

AMI BIOS™ is immediately activated when you first power on the computer. The BIOS reads the system information contained in the NVRAM and begins the process of checking out the system and configuring it. When it finishes, the BIOS will seek an operating system on one of the disks and then launch and turn control over to the operating system.

While the BIOS is in control, the Setup program can be activated in one of two ways:

By pressing <ESC> or immediately after switching the system on, or

By pressing the <ESC> or key when the following message appears briefly at the left-top of the screen during the POST (Power On Self Test).

Press <ESC> or to enter SETUP

If the message disappears before you respond and you still wish to enter Setup, restart the system to try again by turning it OFF then ON or pressing the "RESET" button on the system case. You may also restart by simultaneously pressing <Ctrl>, <Alt>, and <Delete> keys.

4.3 Using Setup

In general, you use the arrow keys to highlight items, press <Enter> to select, use the PageUp and PageDown keys to change entries, press <F1> for help and press <Esc> to quit. The following table provides more detail about how to navigate in the Setup program using the keyboard.

Button	Description
↑	Move to previous item
↓	Move to next item
←	Move to the item in the left hand
→	Move to the item in the right hand
Esc key	Main Menu -- Quit and not save changes into NVRAM Status Page Setup Menu and Option Page Setup Menu -- Exit current page and return to Main Menu
+ key	Increase the numeric value or make changes
- key	Decrease the numeric value or make changes
F1 key	General help, only for Status Page Setup Menu and Option Page Setup Menu
F2 key	Previous Values
F3 key	Optimized defaults
F4 key	Save & Exit Setup

- **Navigating Through The Menu Bar**

Use the left and right arrow keys to choose the menu you want to be in.



Note: Some of the navigation keys differ from one screen to another.

- **To Display a Sub Menu**

Use the arrow keys to move the cursor to the sub menu you want. Then press <Enter>. A “➤” pointer marks all sub menus.

4.4 Getting Help

Press F1 to pop up a small help window that describes the appropriate keys to use and the possible selections for the highlighted item. To exit the Help Window press <Esc> or the <Enter> key again.

4.5 In Case of Problems

If, after making and saving system changes with Setup, you discover that your computer no longer is able to boot, the AMI BIOS supports an override to the NVRAM settings which resets your system to its defaults.


The best advice is to only alter settings which you thoroughly understand. To this end, we strongly recommend that you avoid making any changes to the chipset defaults. These defaults have been carefully chosen by both BIOS Vendor and your systems manufacturer to provide the absolute maximum performance and reliability. Even a seemingly small change to the chipset setup has the potential for causing you to use the override.

4.6 BIOS setup

Once you enter the Aptio Setup Utility, the Main Menu will appear on the screen. The Main Menu allows you to select from several setup functions and exit choices. Use the arrow keys to select among the items and press <Enter> to accept and enter the sub-menu.

4.6.1 Main Menu

This section allows you to record some basic hardware configurations in your computer and set the system clock.

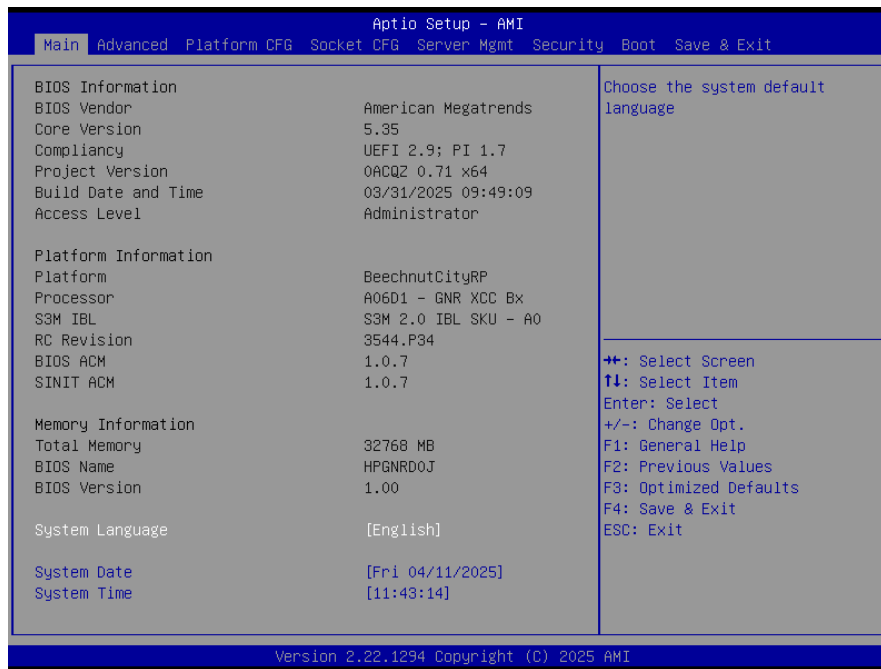

4.6.1.1 System Language

This option allows choosing the system default language.

4.6.1.2 System Date

Use the system date option to set the system date. Manually enter the Month, day and year.

4.6.1.3 System Time

Use the system time option to set the system time. Manually enter the hours, minutes and seconds.




Note: The BIOS setup screens shown in this chapter are for reference purposes only, and may not exactly match what you see on your screen.

Visit the Avalue website (www.avalue.com) to download the latest product and BIOS information.

HPS-GNRD4A

4.6.2 Advanced Menu

This section allows you to configure your CPU and other system devices for basic operation through the following sub-menus.

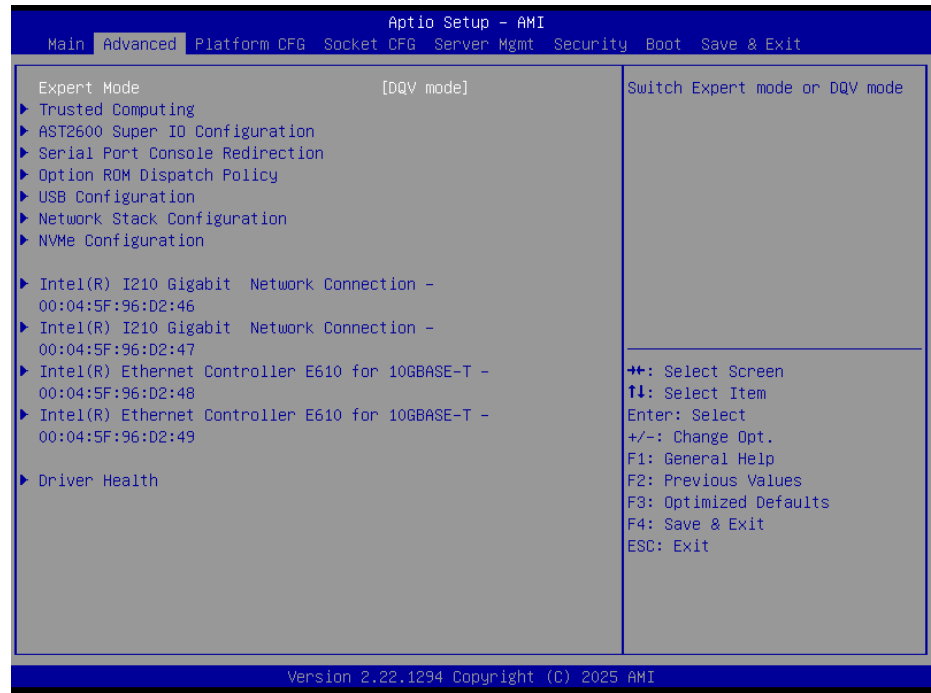


	Options	Description
Expert mode	DQV mode[Default] Expert mode	Switch Expert mode or DQV mode.

4.6.2.1 Trusted Computing




	Options	Description
Security Device Support	Disable, Enable[Default]	Enables or Disables BIOS support for security device. O.S. will not show Security Device. TCG EFI protocol and INT1A interface will not be available.
SHA256 PCR Bank	Disabled, Enabled[Default]	Enables or Disables SHA256 PCR Bank.
SHA384 PCR Bank	Disabled[Default], Enabled	Enables or Disables SHA384 PCR Bank.
Pending operation	None[Default] TPM Clear	Schedule an Operation for the Security Device. NOTE: Your Computer will reboot during restart in order to change State of Security Device.
Physical Presence Spec Version	1.2 1.3[Default]	Select to Tell O.S. to support PPI Spec Version 1.2 or 1.3 Note some HCK tests might not support 1.3.
Device Select	TPM 2.0 Auto[Default]	TPM 1.2 will restrict support to TPM 1.2 devices, TPM 2.0 will restrict support to TPM 2.0 devices, Auto will support both with default set to TPM 2.0 devices if not found, TPM 1.2 devices will be enumerated.

4.6.2.2 AST2600 Super IO Configuration

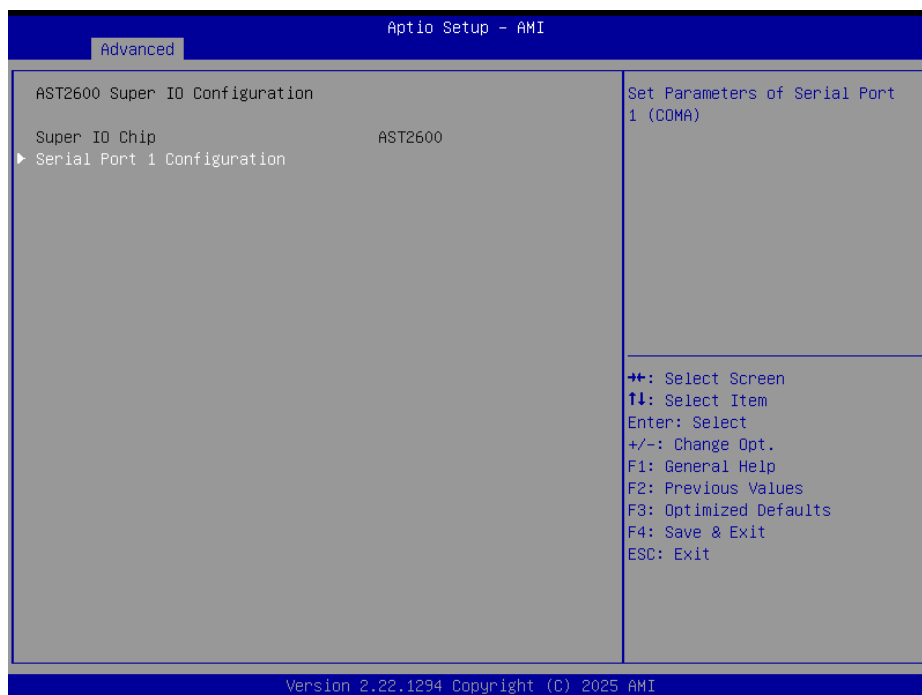


Item	Description
Serial Port 1 Configuration	Set Parameters of Serial Port 1 (COMA).

4.6.2.2.1 Serial Port 1 Configuration

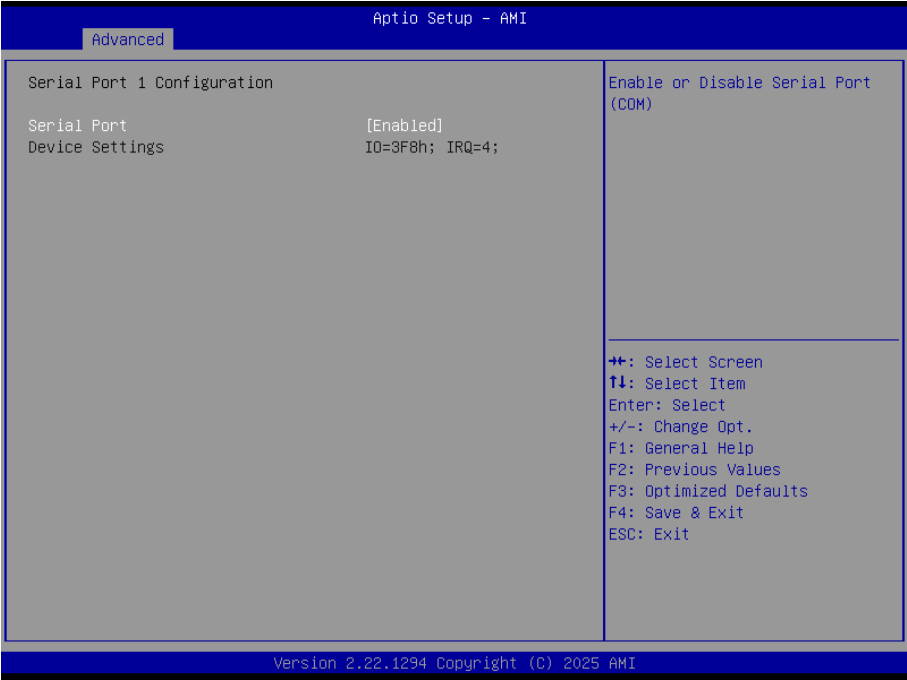

Item	Option	Description
Serial Port	Enabled[Default], Disabled	Enable or Disable Serial Port (COM).


4.6.2.3 Serial Port Console Redirection

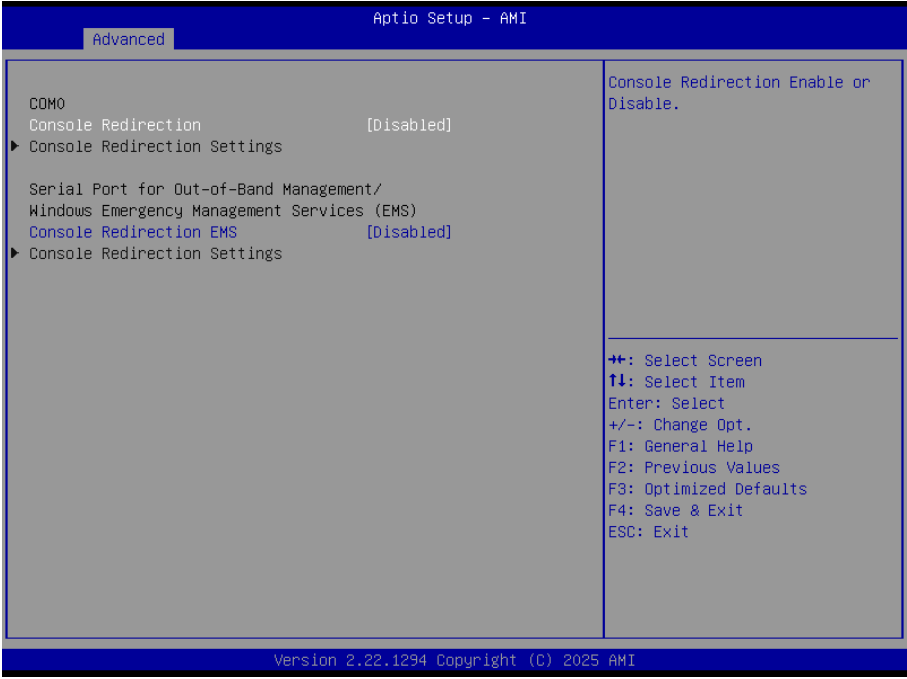

Item	Options	Description
Console Redirection	Disabled[Default], Enabled	Console Redirection Enable or Disable.

Console Redirection EMS	Disabled[Default], Enabled	Console Redirection Enable or Disable.
-------------------------	-------------------------------	--

4.6.2.4 Option ROM Dispatch Policy

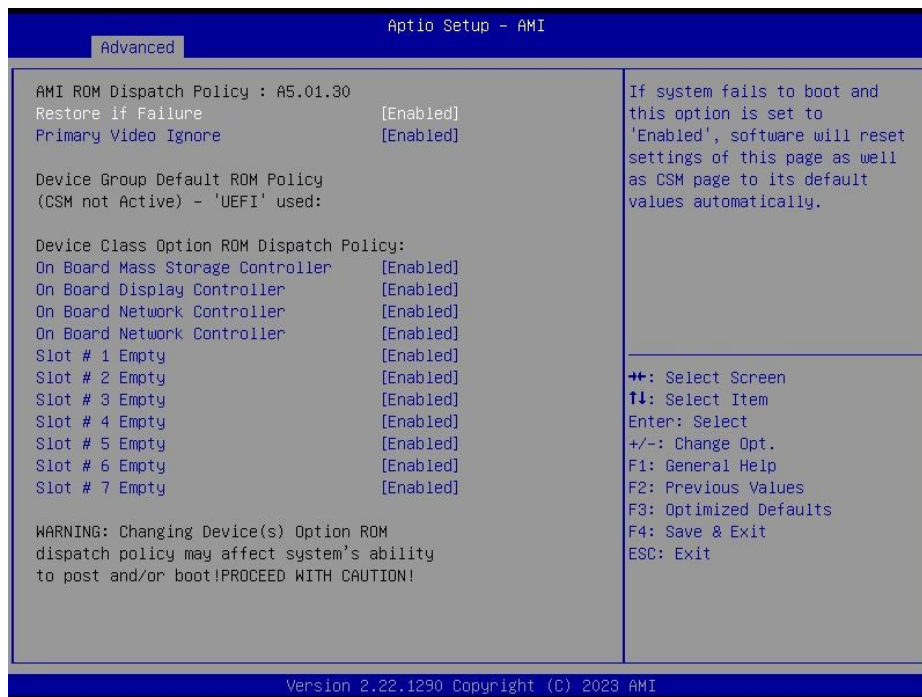

Item	Options	Description
Restore if Failure	Disabled Enabled[Default],	If system fails to boot and this option is set to 'Enabled', software will reset settings of this page as well as CSM page to its default values automatically.
Primary Video Ignore	Disabled Enabled[Default],	If software will detect that due to the Policy settings. Option ROM of Primary Video Device will not dispatch, it will ignore this device policy settings, and restore it to 'Enable' automatically.
Slot#1 Empty	Enabled[Default], Disabled	Enable or Disable Option ROM execution for selected Slot.
Slot#2 Empty	Enabled[Default], Disabled	Enable or Disable Option ROM execution for selected Slot.
Slot#3 Empty	Enabled[Default], Disabled	Enable or Disable Option ROM execution for selected Slot.
Slot#4 Empty	Enabled[Default], Disabled	Enable or Disable Option ROM execution for selected Slot.
Slot#5 Empty	Enabled[Default], Disabled	Enable or Disable Option ROM execution for selected Slot.
Slot#6 Empty	Enabled[Default], Disabled	Enable or Disable Option ROM execution for selected Slot.

4.6.2.5 USB Configuration

The USB Configuration menu helps read USB information and configures USB settings.




Item	Options	Description
Legacy USB Support	Enabled[Default], Disabled Auto	Enables Legacy USB support. AUTO option disables legacy support if no USB devices are connected. DISABLE option will keep USB devices available only for EFI applications.
XHCI Hand-off	Enabled[Default], Disabled	This is a workaround for OSes without XHCI hand-off support. The XHCI ownership change should be claimed by XHCI driver.
USB Mass Storage Driver Support	Disabled Enabled[Default],	Enable/Disable USB Mass Storage Driver Support.
USB transfer time-out	1 sec 5 sec 10 sec 20 sec[Default]	The time-out value for Control, Bulk, and Interrupt transfers.
Device reset time-out	10 sec 20 sec[Default] 30 sec 40 sec	USB mass storage device Start Unit command time-out.
Device power-up delay	Auto[Default] Manual	Maximum time the device will take before it properly reports itself to the Host Controller. 'Auto' uses default value: for a Root port it is 100 ms, for a Hub port the delay is taken from Hub descriptor.
Mass Storage Devices	Auto[Default] Floppy Forced FDD Hard Disk CD-ROM	Mass storage device emulation type. 'AUTO' enumerates devices according to their media format. Optical drives are emulated as 'CDROM', drives with no media will be emulated according to a drive type.

4.6.2.6 Network Stack Configuration




Item	Option	Description
Network stack	Enabled Disabled [Default]	Enable/Disable UEFI Network Stack.

4.6.2.7 NVMe Configuration

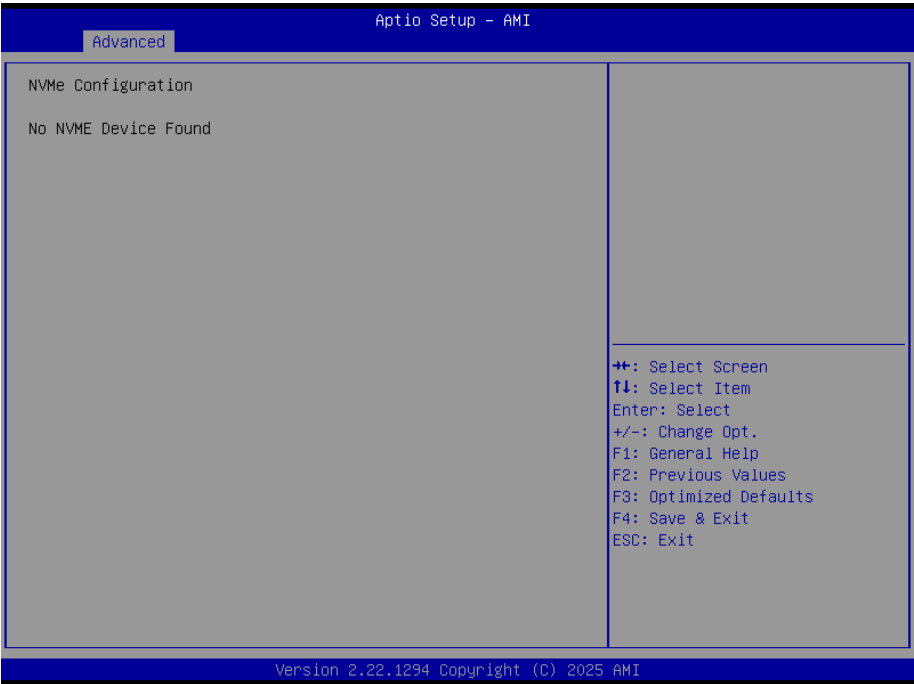


4.6.3 Platform Config

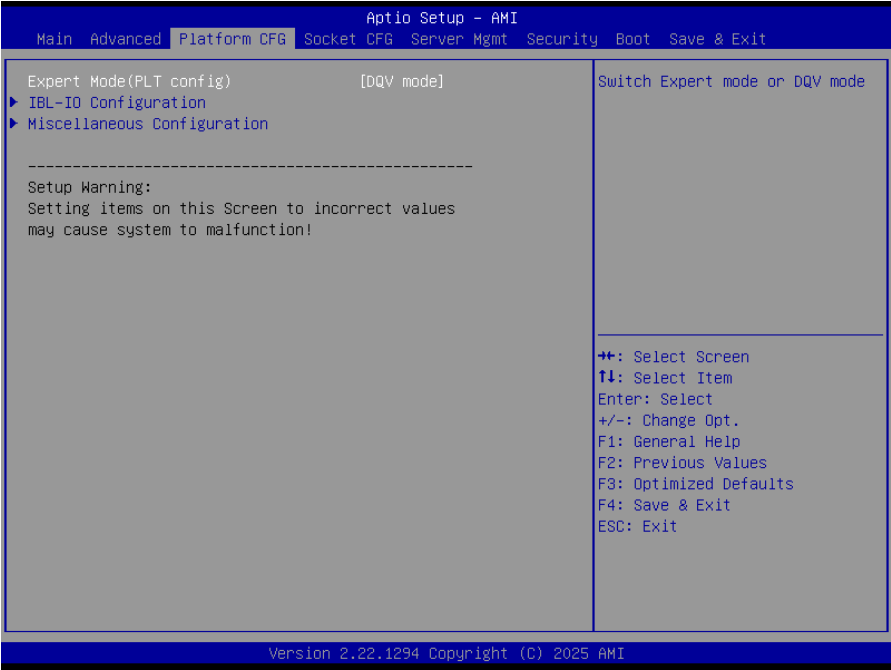

Item	Option	Description
Expert Mode(PLT config)	DQV mode[Default] Expert mode	Switch Expert mode or DQV mode.


4.6.3.1 IBL-IO Configuration

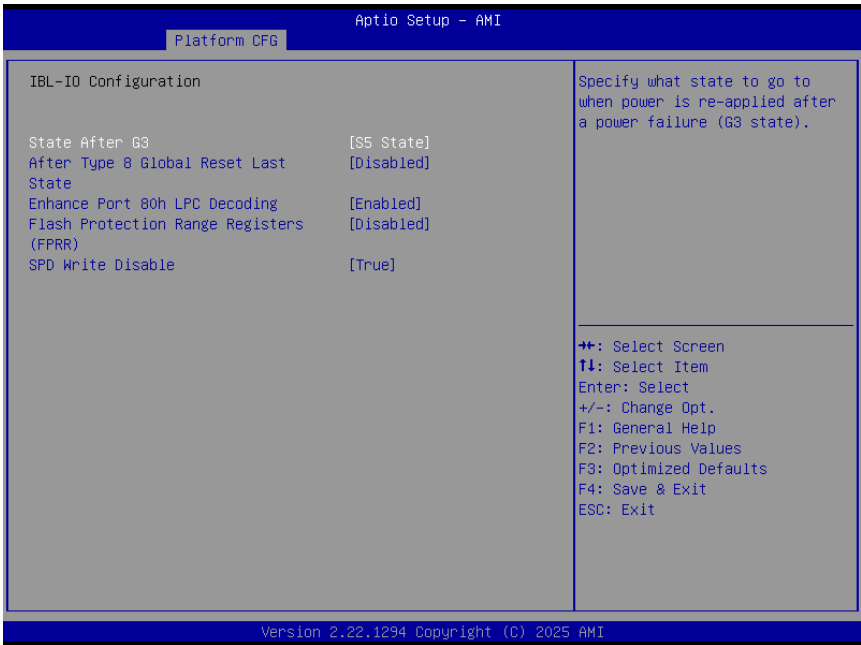

Item	Option	Description
State After G3	S0 State S5 State[Default]	Specify what state to go to when power is re-applied after a power failure (G3 state).
After Type 8 Global Reset Last State	Disabled[Default] Enabled	Specify whether platform's previous state will be considered when determining


		whether to power-up after non-thermal and non-explicitly requested type 8 global resets.
Enhance Port 80h LPC Decoding	Disabled Enabled[Default]	Support the word/dword decoding of port 80h behind LPC.
Flash Protection Range Registers(FRRR)	Disabled[Default] Enabled	Enable Flash Protection Range Registers.
SPD Write Disable	True[Default] False	Enable/Disable setting SPD Write Disable.

4.6.3.2 Miscellaneous Configuration

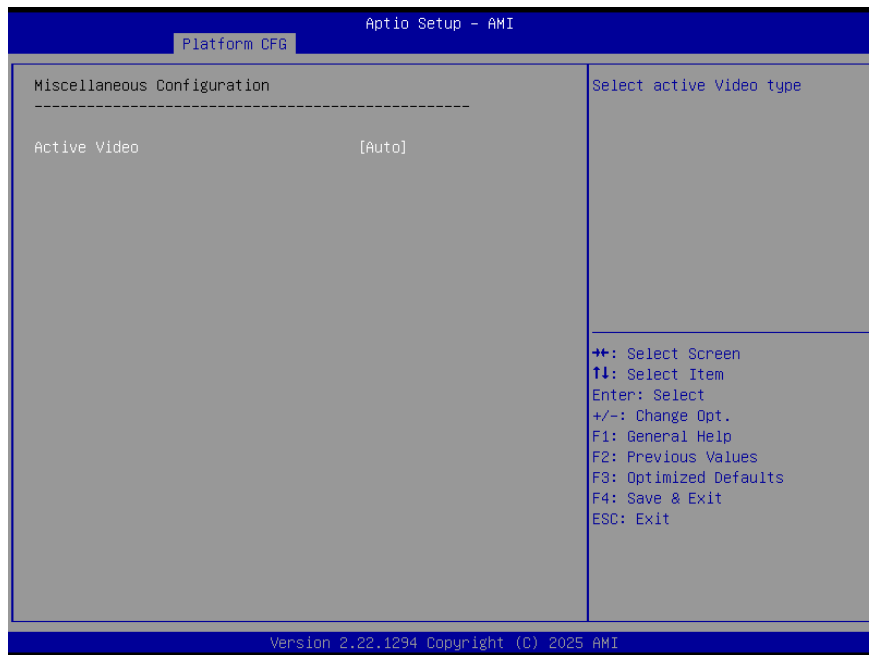


Item	Option	Description
Active Video	Auto[Default] Onboard Device(BMC VGA) PCIe Device	Select active Video type. Early display always output to BMC-VGA. BIOS P.O.S.T display output to PCIe if system have discrete GPU with Option Auto/PCIe-Device.

4.6.4 Socket Config

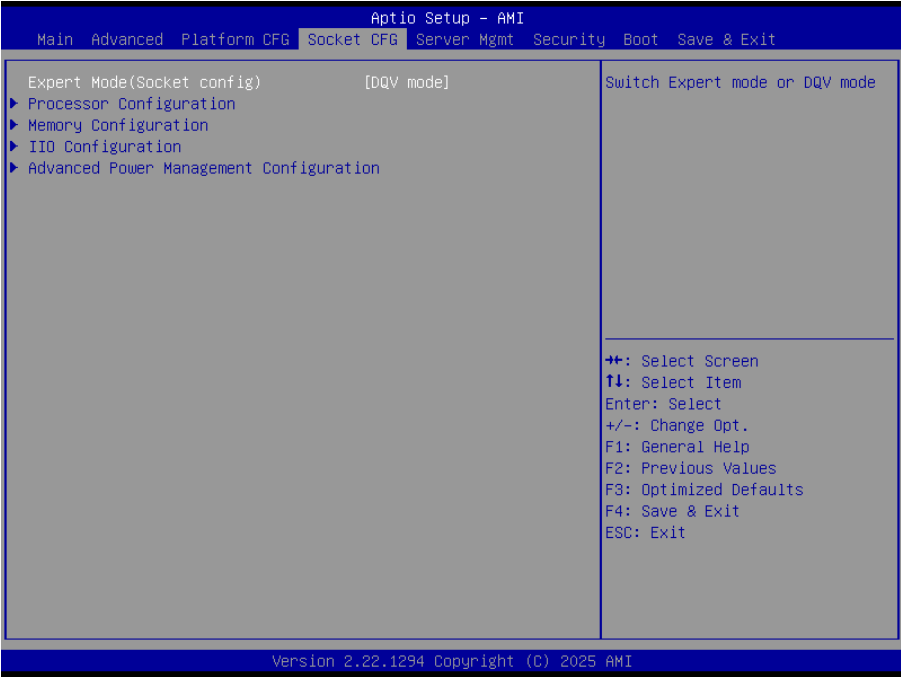

Item	Options	Description
Expert Mode (Socket config)	DQV mode [Default] Expert mode	Switch Expert mode or DQV mode.


4.6.4.1 Processor Configuration

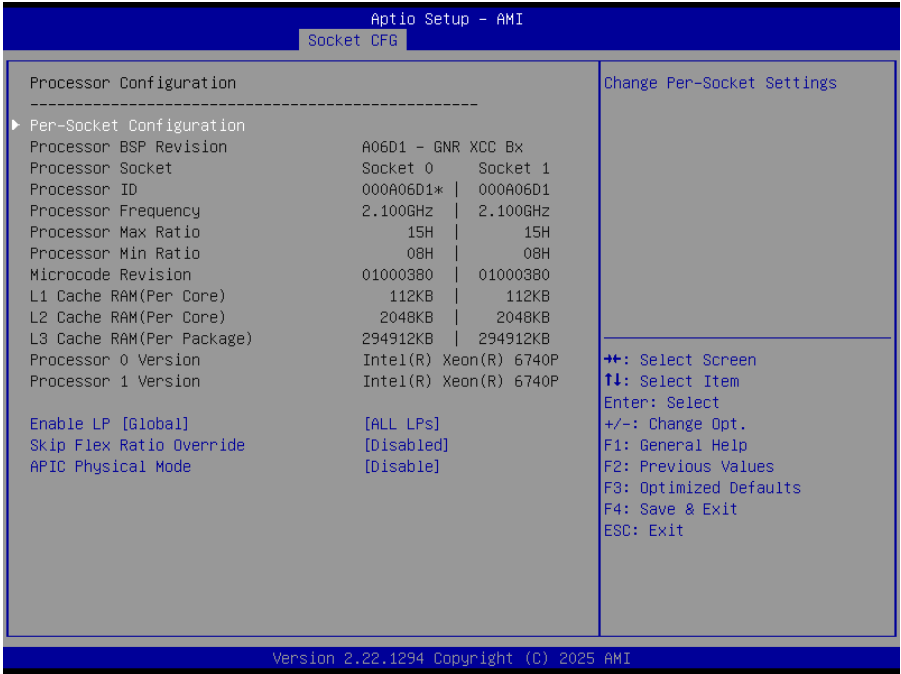

Item	Option	Description
Enable LP [Global]	All LPs [Default] Single LP Two LPs	Enables Logical processor (Software Method o Enable/Disable Logical Processor threads).
Skip Flex Ratio Override	Disabled [Default]	Skip Flex Ratio override to use power-on default


	Enabled	Flex Ratio values. In multi-socket systems, this will allow mixed flex ratio limits.
APIC Physical Mode	Disabled [Default] Enabled	Enable/Disable the APIC physical destination mode.

4.6.4.2 Memory Configuration

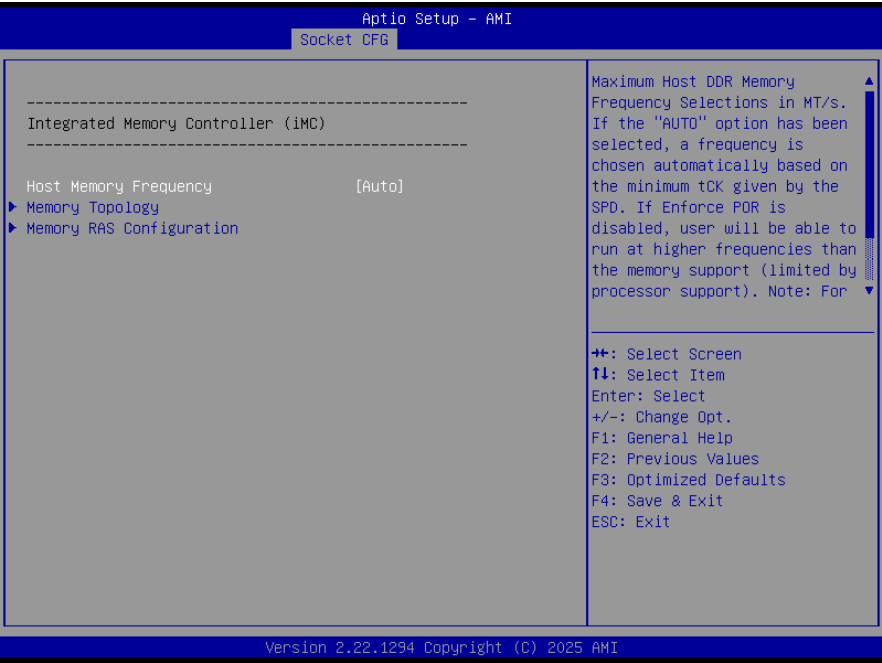

Item	Option	Description
Memory Frequency	Auto [Default]	Maximum Memory Frequency Selections in MT/s. If Enforce POR is disabled, user will be able to run at higher frequencies than the memory support (limited by processor support). Do not select Reserved.
	3200	
	3600	
	4000	
	4400	
	4800	
	5200	
	5600	

4.6.4.2.1 Memory Topology

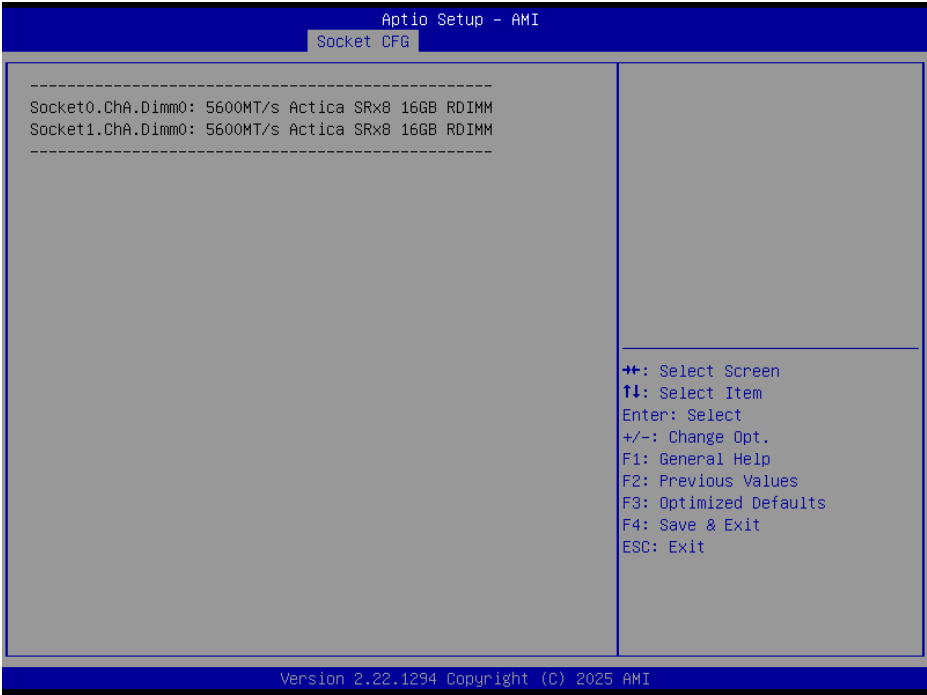


4.6.4.2.2 Memory RAS Configuration




Item	Option	Description
Mirror Mode	Disabled [Default] Full Mirror Mode	Full Mirror Mode will set entire 1LM memory in system to be mirrored, consequently reducing the memory capacity by half, Partial Mirror Mode will enable the required size of memory to be mirrored. If rank sparing is enabled partial mirroring will not take effect. Enabling any type of Mirror Mode will disable XPT Prefetch.

UEFI ARM Mirror	Disabled [Default] Enabled	Imitate behavior of UEFI based Address Range Mirror with setup option.
Mirror TAD0	Disabled [Default] Enabled	Enable Mirror on entire memory for TAD0.


4.6.4.3 IIO Configuration

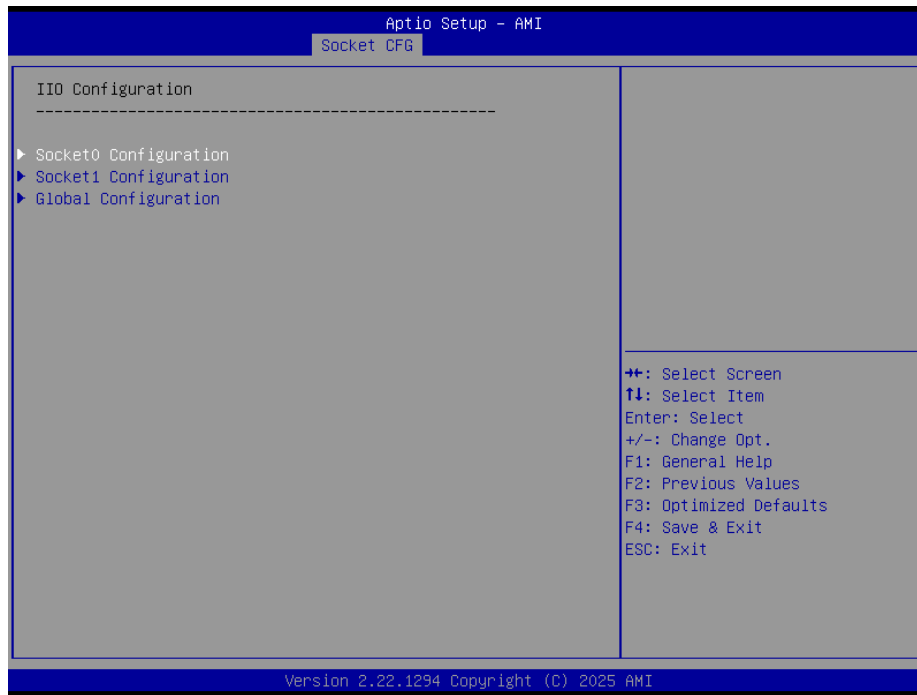

4.6.4.3.1 Socket0 Configuration

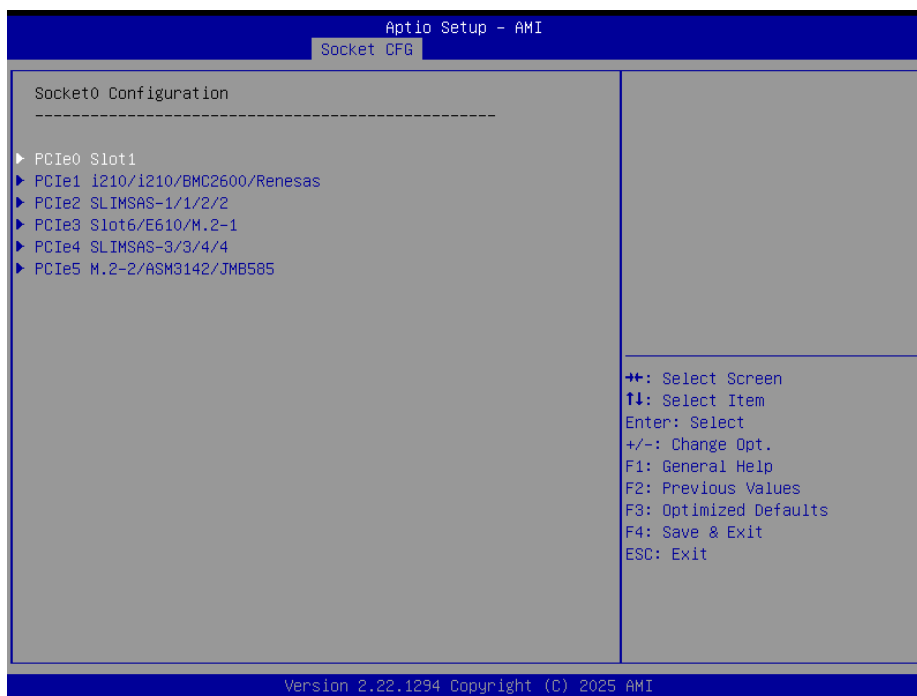


4.6.4.3.1.1 PCI Express 0

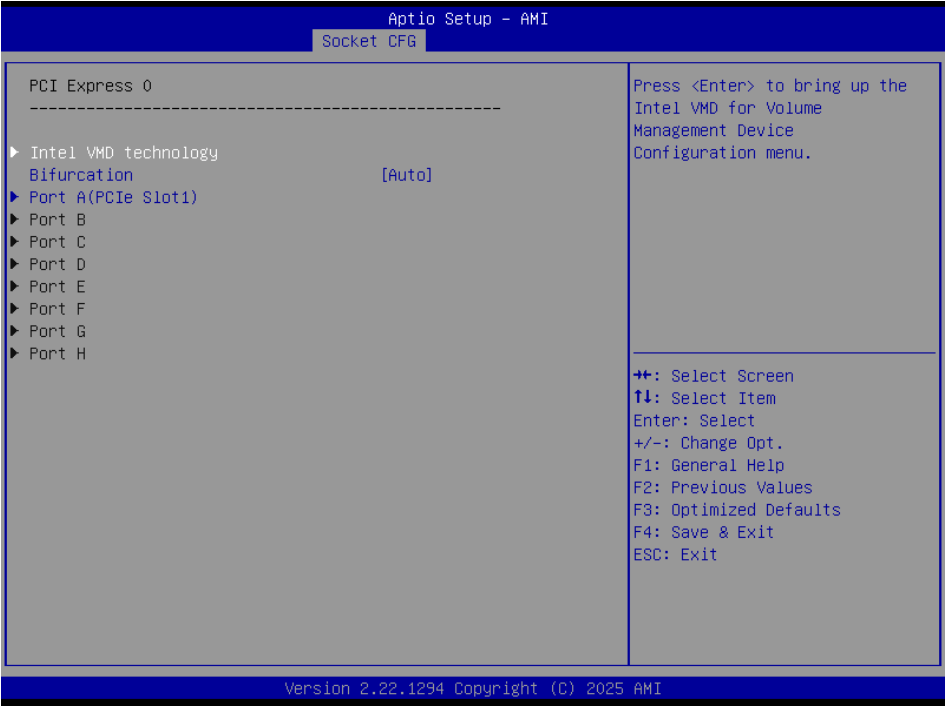


Item	Option	Description
Bifurcation	Auto[Default]	Select PCIe port Bifurcation for selected slot(s) Port Format: xGxExCxA The port can further be x2x2 Disable-disable all PCIe Lanes and the controller.
	x4x4x4x4	
	x4x4x_x8	
	x_x8x4x4	
	x_x8x_x8	
	x_x_x_x16	
	x2x2x4x_x8	
	x4x2x2x_x8	
	x_x8x2x2x4	
	x2x2x4x4x4	
	x4x2x2x4x4	
	x4x4x2x2x4	
	x2x2x2x2x_x8	
	x2x2x2x2x4x4	
	x2x2x4x2x2x4	
	x4x2x2x2x2x4	
	x2x2x2x2x2x2x4	
	x_x8x4x2x2	
	x4x4x4x2x2	
	x_x8x2x2x2x2	
	x2x2x4x4x2x2	
	x4x2x2x4x2x2	
	x4x4x2x2x2x2	
	x2x2x2x2x4x2x2	
	x2x2x4x2x2x2x2	
	x4x2x2x2x2x2x2	
	x2x2x2x2x2x2x2x2	

4.6.4.3.1.1.1 Intel VMD technology

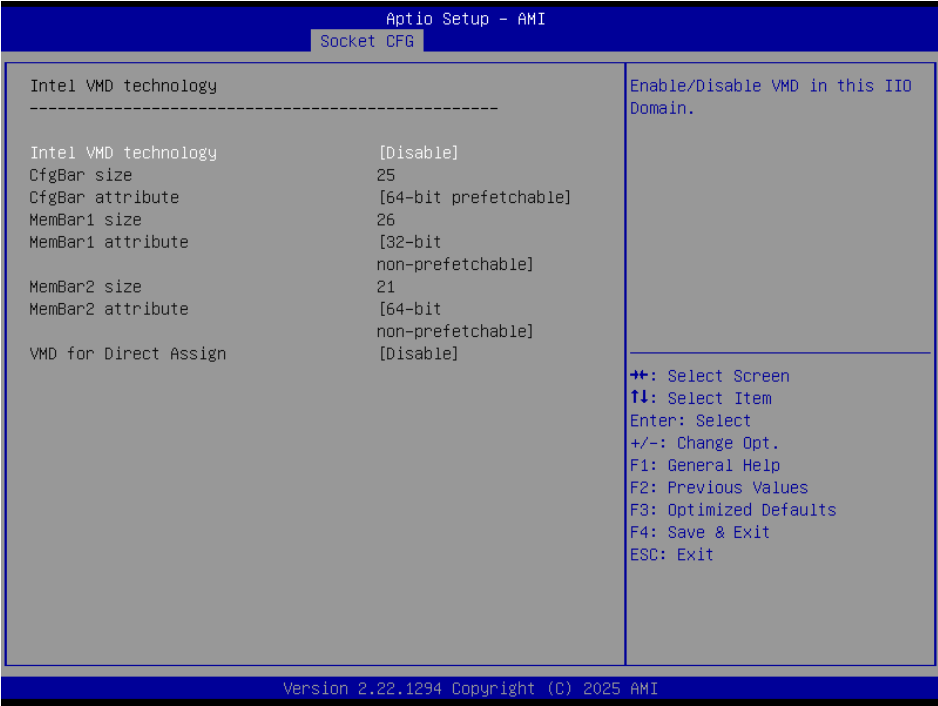

Item	Option	Description
Intel VMD technology	Disabled[Default] Enabled	Intel VMD technology

4.6.4.3.1.1.2 Port A ~ Port H

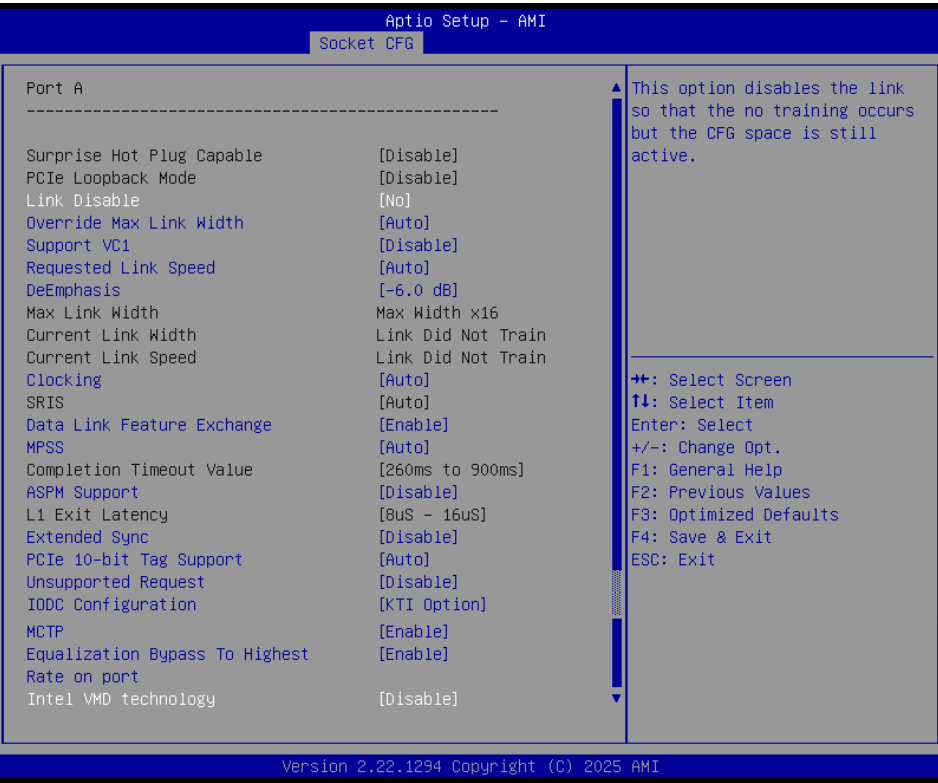


Item	Option	Description
Link Disable	No[Default] Yes	This option disables the link so that the no training occurs but the CFG space is still active.
Override Max Link Width	Auto[Default] x1 x2 x4 x8 x16	Override the max link width that was set by bifurcation.
Support VC1	Disable[Default] Enable	Enable/Disable PCIe Port VC1 support. x2 ports share the same VC1 channel.
Requested Link Speed	Auto[Default] Gen 1 (2.5 GT/s) Gen 2 (5 GT/s) Gen 3 (8 GT/s) Gen 4 (16 GT/s) Gen 5 (32 GT/s)	Choose Link Speed for this PCIe port.
DeEmphasis	-6.0 dB[Default] -3.5 dB	DeEmphasis control (LNKCON2[6]) for this PCIe port.
Clocking	Distinct Common Auto[Default]	Configure port clocking via LNKCON[6]. This refers to this components and the down stream component. ;Auto' keeps board default.
Data Link Feature Exchange	Disable Enable[Default]	Enable/Disable data link feature negotiation in the Data Link Feature Capabilities (DLFCAP) register.
MPSS	128B 256B 512B Auto[Default]	Configure Max Payload Size Supported in PCIe Device Capabilities register. 'Auto' keeps hardware default.
ASPM Support	Disabled[Default] Auto	This option can disable ASPM support in a PCIe root port. 'Auto' keeps hardware default.
Extended Sync	Disable[Default] Enable	Enable/disable the Extended Sync Mode (D:x F:0 O:7Ch B:7) where x is 0-9.
PCIe 10-bit Tag Support	Disable Auto[Default] Force Enable	'Disable' option can disable PCIe 10-bit Tag Requester (not Completer) support in a PCIe Root Port. 'Auto' keeps hardware default. When disabled system FW does not configure 10-bit Tag in hierarchy under Root Port, however OS could reconfigure and enable it . Advanced user may use 'Force Enable' option to enforce enabling 10-bit Tag in a hierarchy wherer Root Port is 10-bit Tag Completer capable, but not all nodes support 10-bit Tag Completer. The user

Quick Reference Guide

		assures, there will be no peer-to-peer traffic from node with 10-bit Tag Requester capability to a node without 10-bit Tag Completer capability, In such hierarchy 10-bit Tag Requester is not enabled in Root Port regardless of Root Port capability.
Unsupported Request	Disable [Default] Enable	Controls the reporting of unsupported requests that IIO itself detects on requests its receives from a PCI Express/DMI port.
IODC Configuration	KTI Option [Default] /Auto/ Enable for Remote Invltom Hybrid Push/Invltom AllocFlow/ Enable for Remote Invltom Hybrid AllocNonAllow/Enable for Remote Invltom and Remote WViLF	Enable/Disable IODC (IO Direct Cashe): Generate snoops instead of memory lookups, for remote Invltom(IIO) and/or WViLF(cores).
MCTP	Disable Enable [Default]	Enable/Disable MCTP.
Equalization Bypass To Highest Rate on port	Disable Enable [Default]	Equalization Bypass To Highest Rate Support Enable/Disable.
Intel VMD Technology	Disable [Default] Enable	Enable/Disable Intel Volume Management Device Technology on specific root port.

4.6.4.3.1.2 PCI Express 1

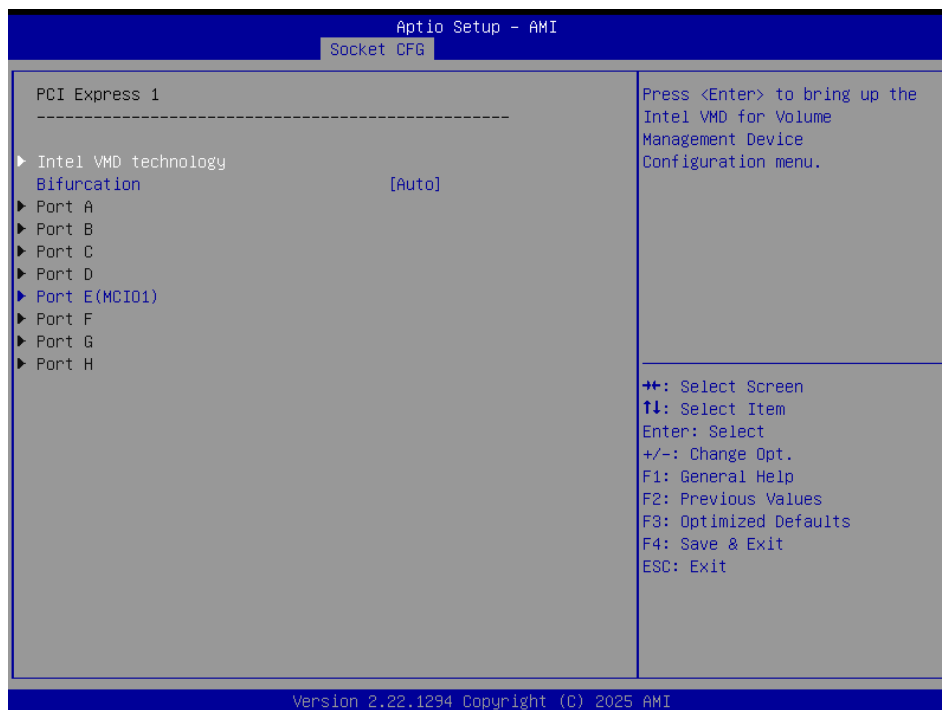


Item	Option	Description
Bifurcation	Auto [Default] x4x4x4x4 x4x4x_x8 x_x8x4x4	Select PCIe port Bifurcation for selected slot(s) Port Format: xGxExCx4 The port can further be x2x2 Disable-disable all PCIe Lanes and the

	x_x8x_x8 x_x_x_x16 x2x2x4x_x8 x4x2x2x_x8 x_x8x2x2x4 x2x2x4x4x4 x4x2x2x4x4 x4x4x2x2x4 x2x2x2x2x_x8 x2x2x2x2x4x4 x2x2x4x2x2x4 x4x2x2x2x2x4 x2x2x2x2x2x2x4 x_x8x4x2x2 x4x4x4x2x2 x_x8x2x2x2x2 x2x2x4x4x2x2 x4x2x2x4x2x2 x4x4x2x2x2x2 x2x2x2x2x4x2x2 x2x2x4x2x2x2x2 x4x2x2x2x2x2x2 x2x2x2x2x2x2x2x2	controller.
--	--	-------------

4.6.4.3.1.2.1 Intel VMD technology


Please refer to 4.6.4.3.1.1.1 for more information.

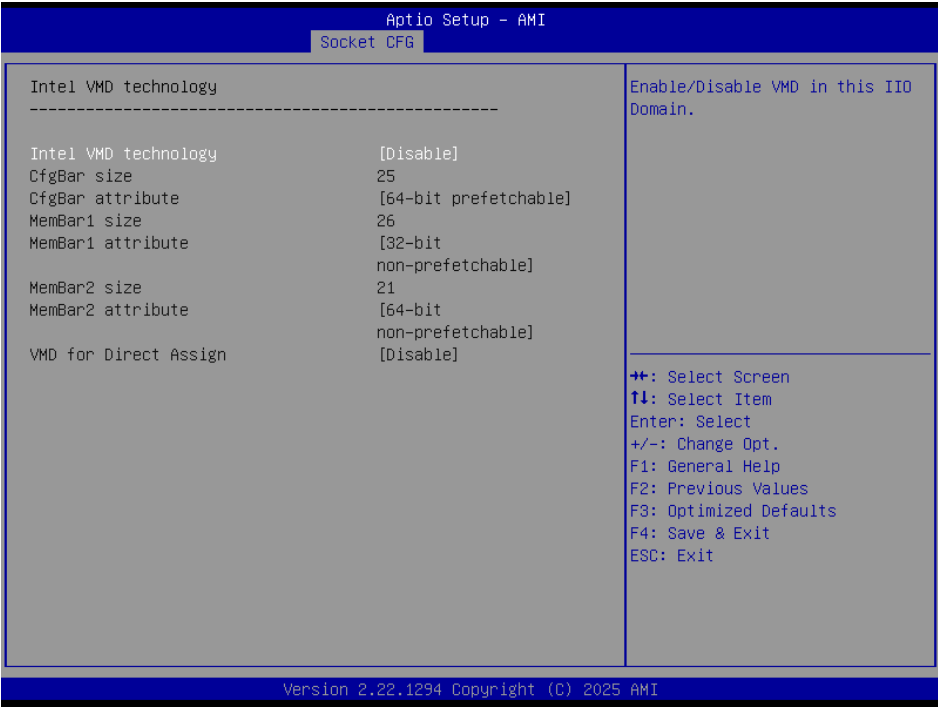

Item	Option	Description
Intel VMD technology	Disabled[Default] Enabled	Intel VMD technology

4.6.4.3.1.2.2 Port A ~ Port H

Please refer to 4.6.4.3.1.1.2 for more information.

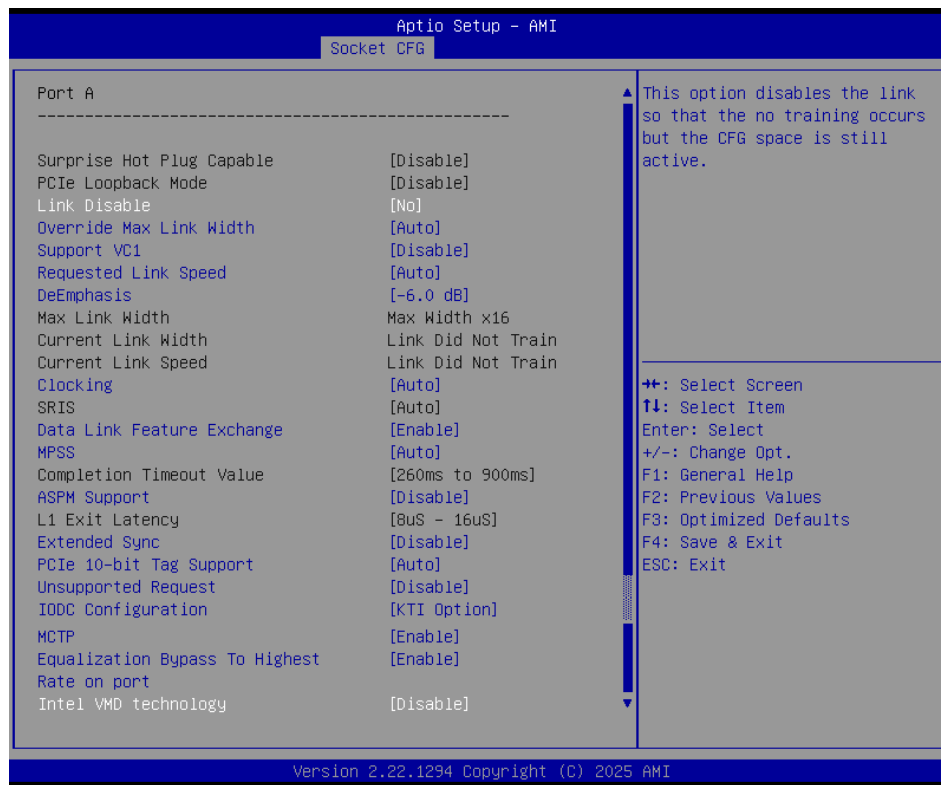

4.6.4.3.1.3 PCI Express 2




Item	Option	Description
Bifurcation	Auto[Default]	Select PCIe port Bifurcation for selected slot(s)
	x4x4x4x4	Port Format: xGxExCx4 The port can further be
	x4x4x_x8	x2x2 Disable-disable all PCIe Lanes and the

	x_x8x4x4 x_x8x_x8 x_x_x_x16 x2x2x4x_x8 x4x2x2x_x8 x_x8x2x2x4 x2x2x4x4x4 x4x2x2x4x4 x4x4x2x2x4 x2x2x2x2x_x8 x2x2x2x2x4x4 x2x2x4x2x2x4 x4x2x2x2x2x4 x2x2x2x2x2x2x4 x_x8x4x2x2 x4x4x4x2x2 x_x8x2x2x2x2 x2x2x4x4x2x2 x4x2x2x4x2x2 x4x4x2x2x2x2 x2x2x2x2x4x2x2 x2x2x4x2x2x2x2 x4x2x2x2x2x2x2 x2x2x2x2x2x2x2x2	controller.
--	---	-------------

4.6.4.3.1.3.1 Intel VMD technology


Please refer to 4.6.4.3.1.1.1 for more information.

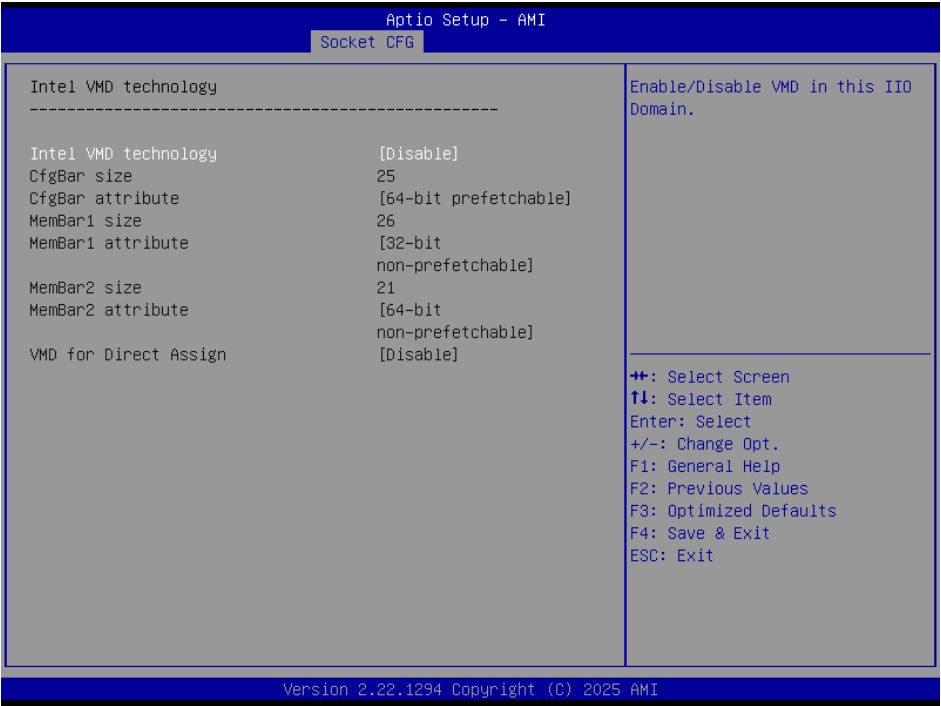

Item	Option	Description
Intel VMD technology	Disabled[Default] Enabled	Intel VMD technology

4.6.4.3.1.3.2 Port A ~ Port H

Please refer to 4.6.4.3.1.1.2 for more information.

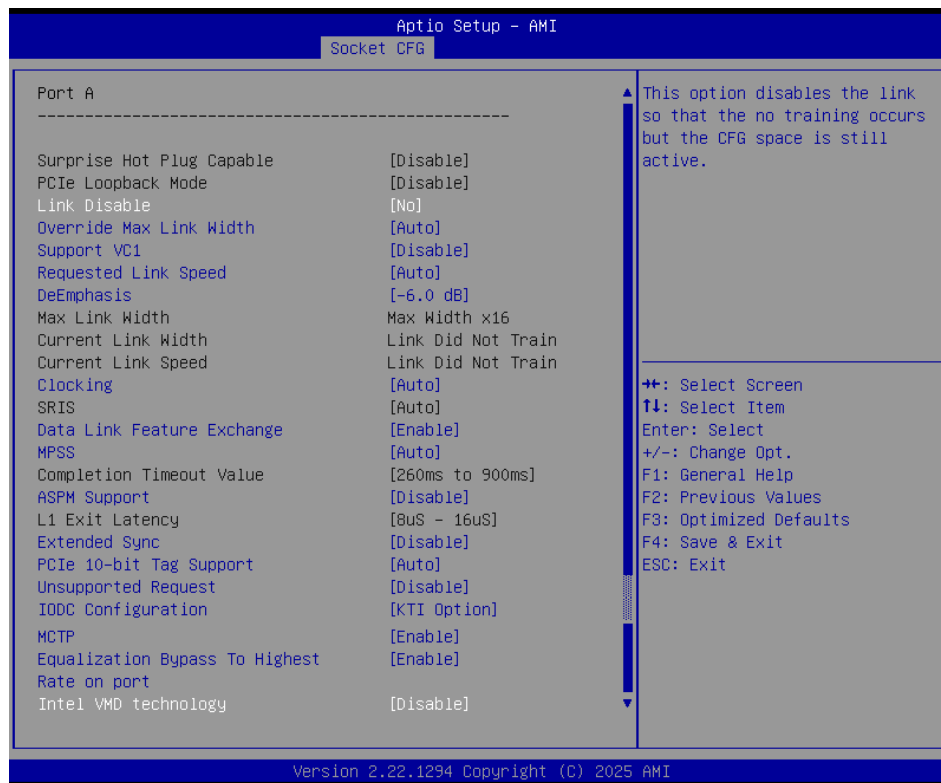

4.6.4.3.1.4 PCI Express 3




Item	Option	Description
Bifurcation	Auto[Default]	Select PCIe port Bifurcation for selected slot(s)
	x4x4x4x4	Port Format: xGxExCx4 The port can further be
	x4x4x_x8	x2x2 Disable-disable all PCIe Lanes and the

	x_x8x4x4 x_x8x_x8 x_x_x_x16 x2x2x4x_x8 x4x2x2x_x8 x_x8x2x2x4 x2x2x4x4x4 x4x2x2x4x4 x4x4x2x2x4 x2x2x2x2x_x8 x2x2x2x2x4x4 x2x2x4x2x2x4 x4x2x2x2x2x4 x2x2x2x2x2x2x4 x_x8x4x2x2 x4x4x4x2x2 x_x8x2x2x2x2 x2x2x4x4x2x2 x4x2x2x4x2x2 x4x4x2x2x2x2 x2x2x2x2x4x2x2 x2x2x4x2x2x2x2 x4x2x2x2x2x2x2 x2x2x2x2x2x2x2x2	controller.
--	---	-------------

4.6.4.3.1.4.1 Intel VMD technology


Please refer to 4.6.4.3.1.1 for more information.

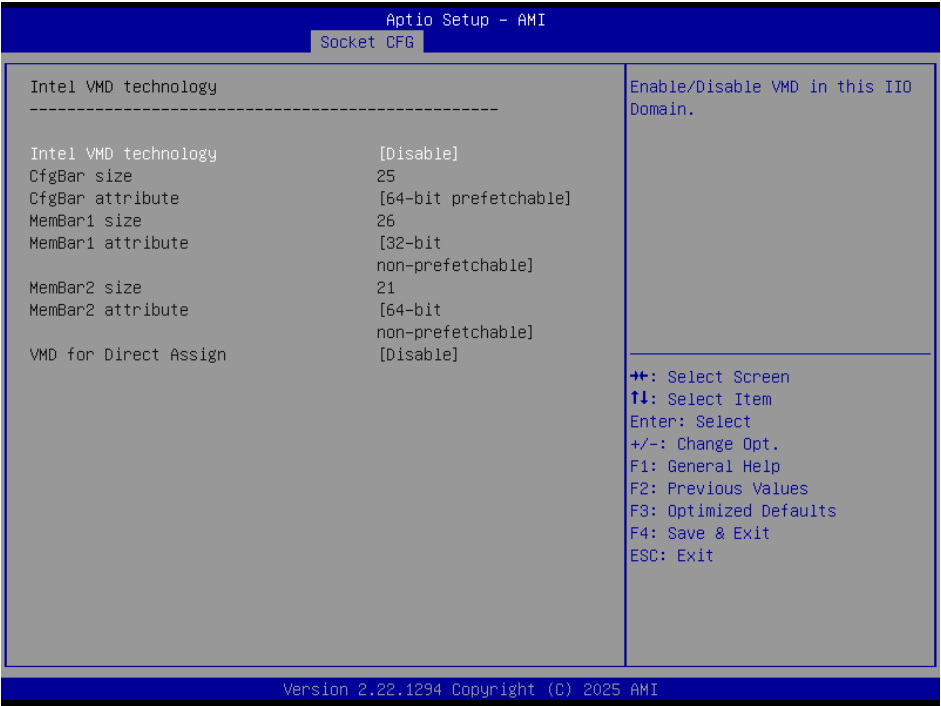


Item	Option	Description
Intel VMD technology	Disabled[Default] Enabled	Intel VMD technology

4.6.4.3.1.4.2 Port A ~ Port H

Please refer to 4.6.4.3.1.1.2 for more information.

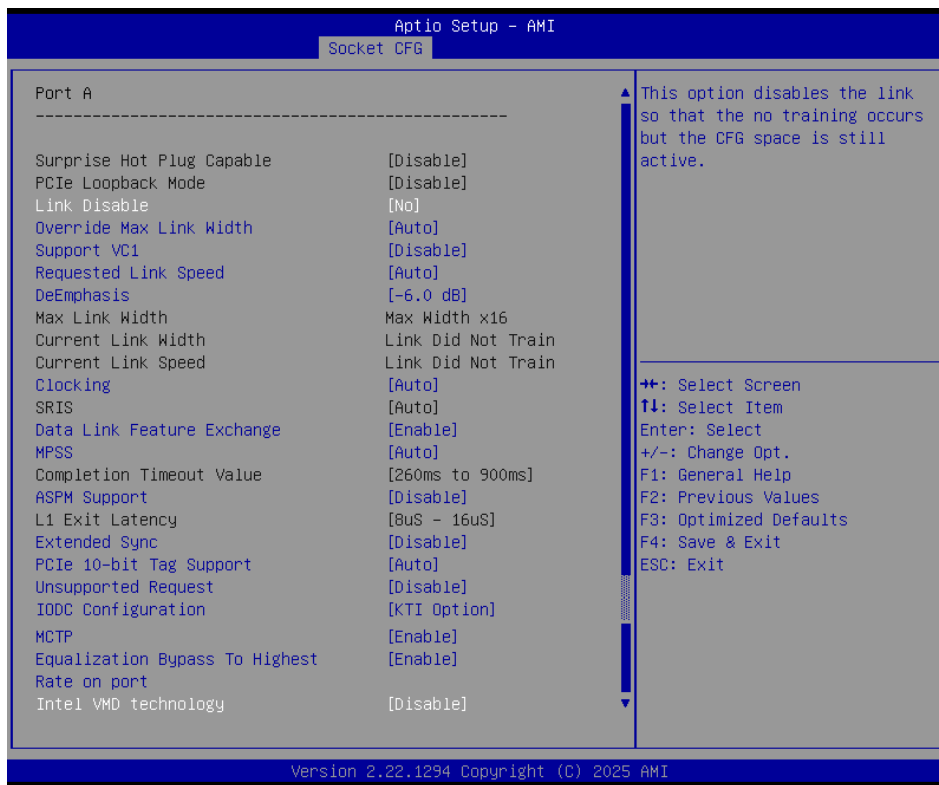

4.6.4.3.1.5 PCI Express 4

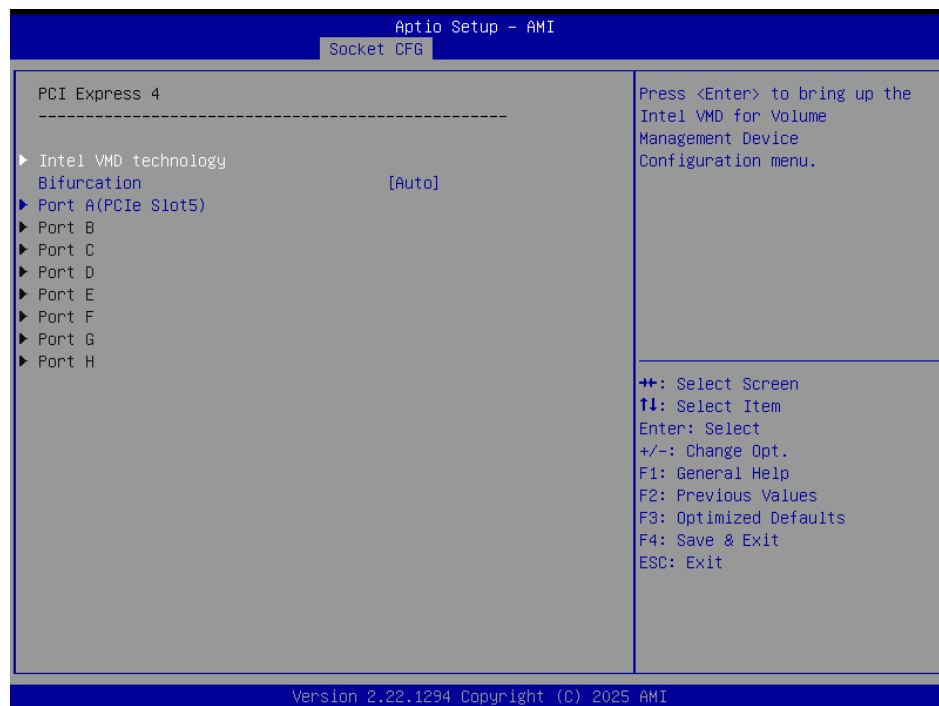


Item	Option	Description
Bifurcation	Auto[Default]	Select PCIe port Bifurcation for selected slot(s)
	x4x4x4x4	Port Format: xGxExCx4 The port can further be
	x4x4x_x8	x2x2 Disable-disable all PCIe Lanes and the

	x_x8x4x4 x_x8x_x8 x_x_x_x16 x2x2x4x_x8 x4x2x2x_x8 x_x8x2x2x4 x2x2x4x4x4 x4x2x2x4x4 x4x4x2x2x4 x2x2x2x2x_x8 x2x2x2x2x4x4 x2x2x4x2x2x4 x4x2x2x2x2x4 x2x2x2x2x2x2x4 x_x8x4x2x2 x4x4x4x2x2 x_x8x2x2x2x2 x2x2x4x4x2x2 x4x2x2x4x2x2 x4x4x2x2x2x2 x2x2x2x2x4x2x2 x2x2x4x2x2x2x2 x4x2x2x2x2x2x2 x2x2x2x2x2x2x2x2	controller.
--	---	-------------

4.6.4.3.1.5.1 Intel VMD technology


Please refer to 4.6.4.3.1.1.1 for more information.

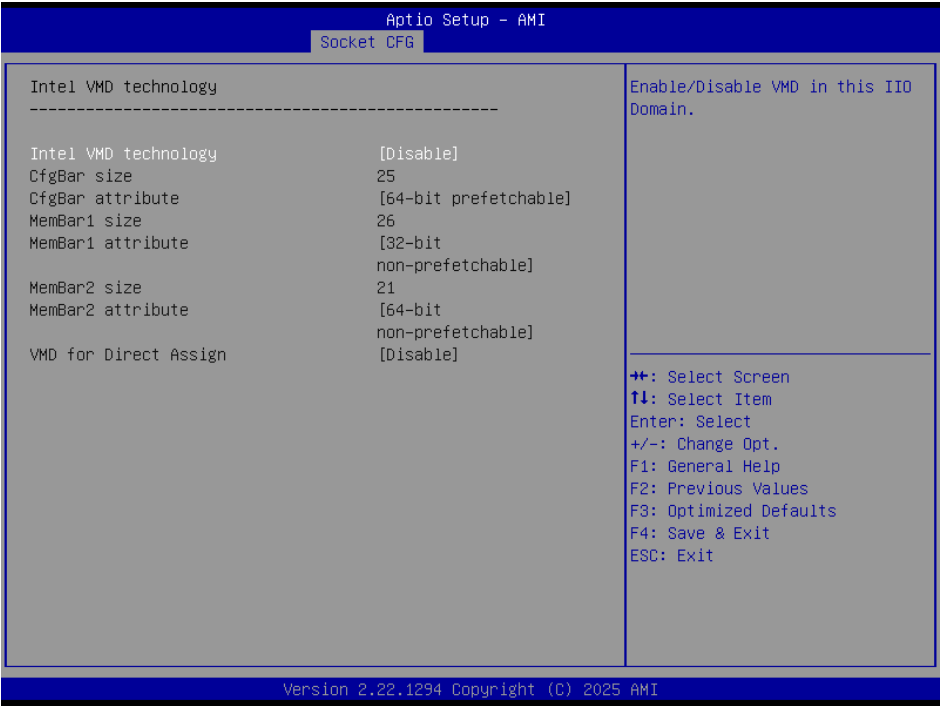


Item	Option	Description
Intel VMD technology	Disabled[Default] Enabled	Intel VMD technology

4.6.4.3.1.5.2 Port A ~ Port H

Please refer to 4.6.4.3.1.1.2 for more information.

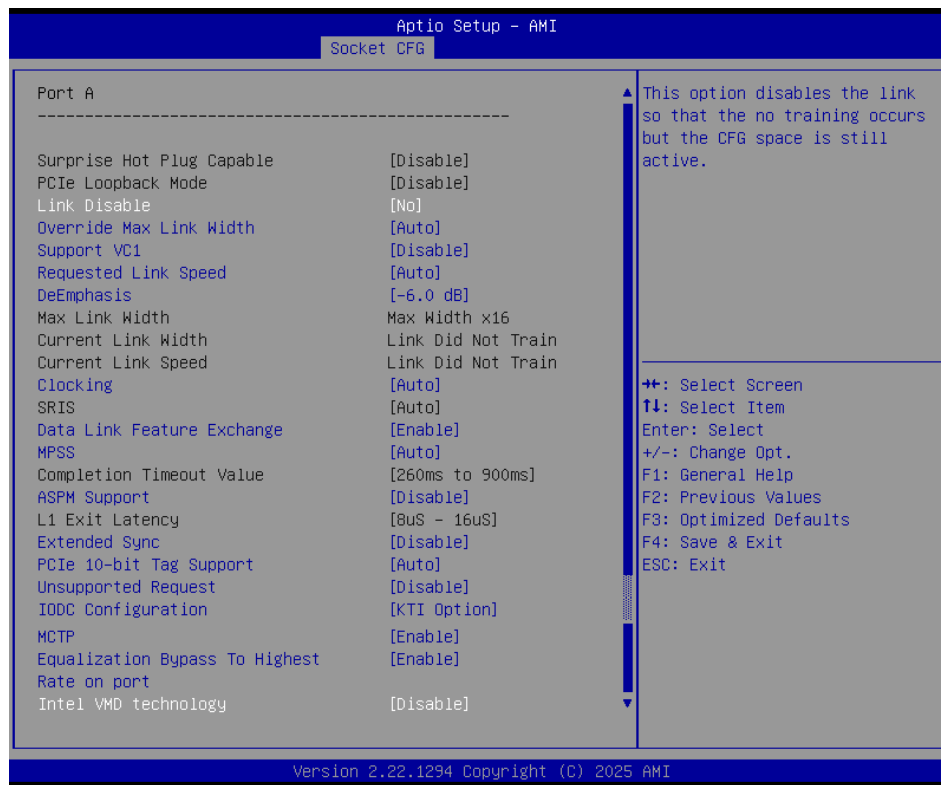

4.6.4.3.1.6 PCI Express 5

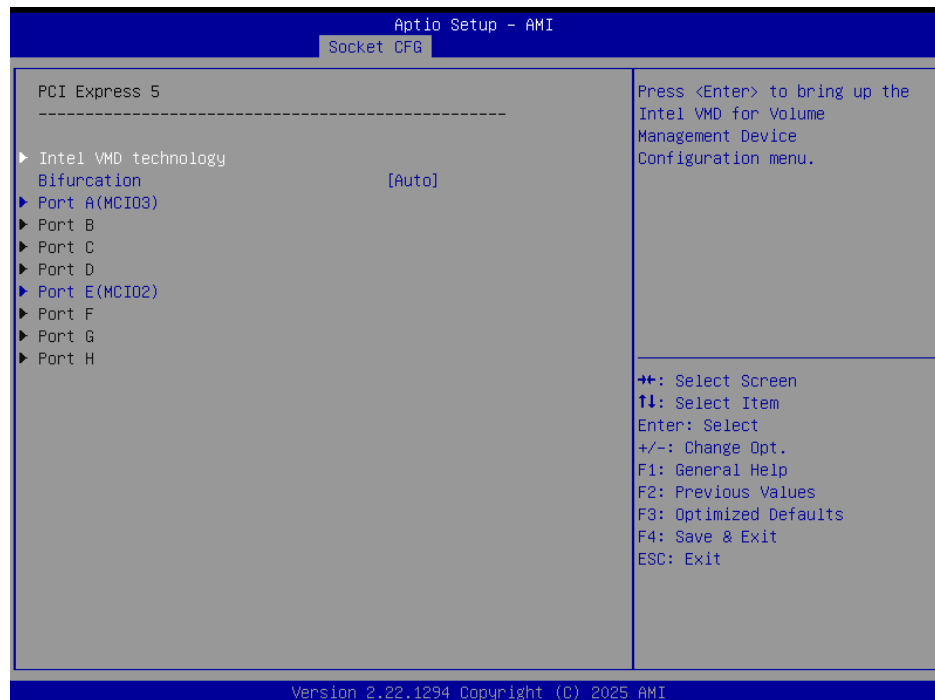


Item	Option	Description
Bifurcation	Auto[Default]	Select PCIe port Bifurcation for selected slot(s)
	x4x4x4x4	Port Format: xGxExCx4 The port can further be
	x4x4x_x8	x2x2 Disable-disable all PCIe Lanes and the

	x_x8x4x4 x_x8x_x8 x_x_x_x16 x2x2x4x_x8 x4x2x2x_x8 x_x8x2x2x4 x2x2x4x4x4 x4x2x2x4x4 x4x4x2x2x4 x2x2x2x2x_x8 x2x2x2x2x4x4 x2x2x4x2x2x4 x4x2x2x2x2x4 x2x2x2x2x2x2x4 x_x8x4x2x2 x4x4x4x2x2 x_x8x2x2x2x2 x2x2x4x4x2x2 x4x2x2x4x2x2 x4x4x2x2x2x2 x2x2x2x2x4x2x2 x2x2x4x2x2x2x2 x4x2x2x2x2x2x2 x2x2x2x2x2x2x2x2	controller.
--	---	-------------

4.6.4.3.1.6.1 Intel VMD technology


Please refer to 4.6.4.3.1.1.1 for more information.

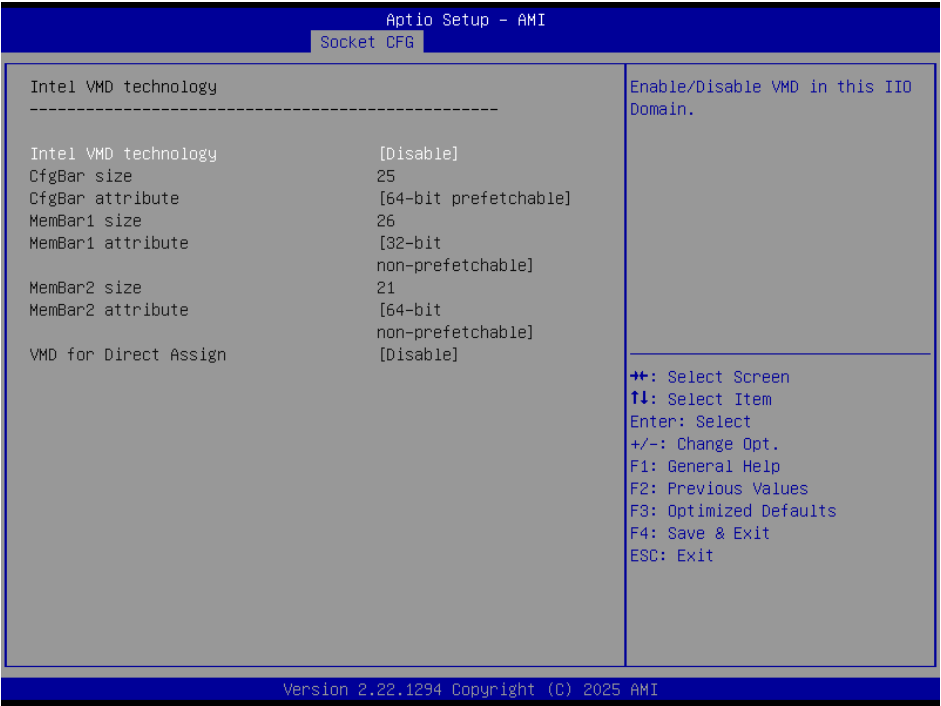


Item	Option	Description
Intel VMD technology	Disabled[Default] Enabled	Intel VMD technology

4.6.4.3.1.6.2 Port A ~ Port H


Please refer to 4.6.4.3.1.1.2 for more information.

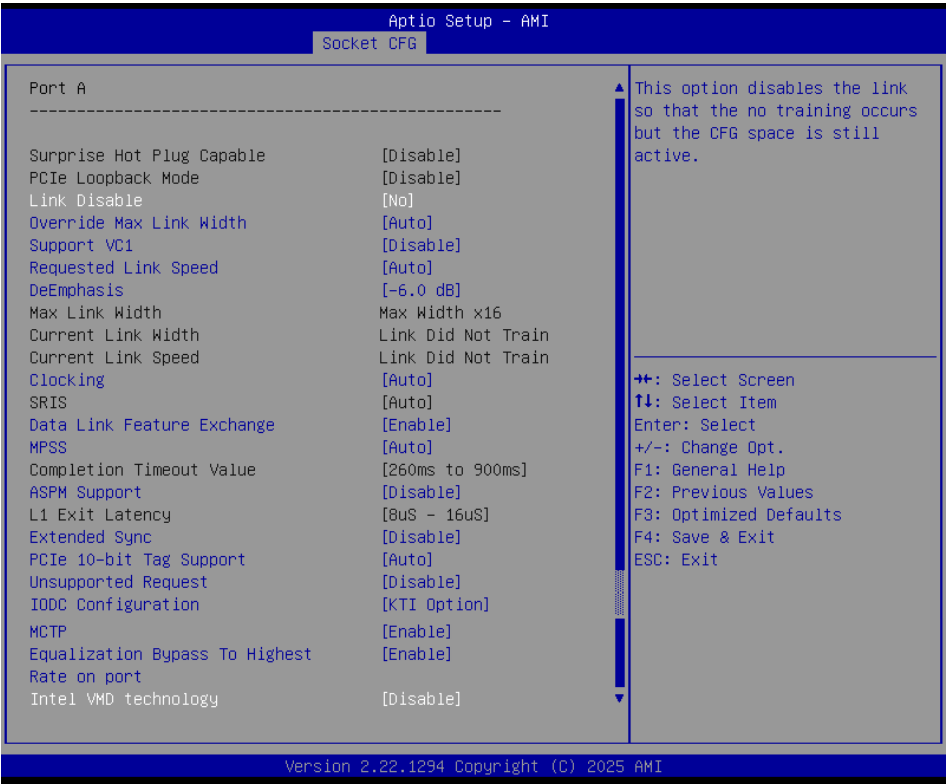

4.6.4.3.2 Socket1 Configuration

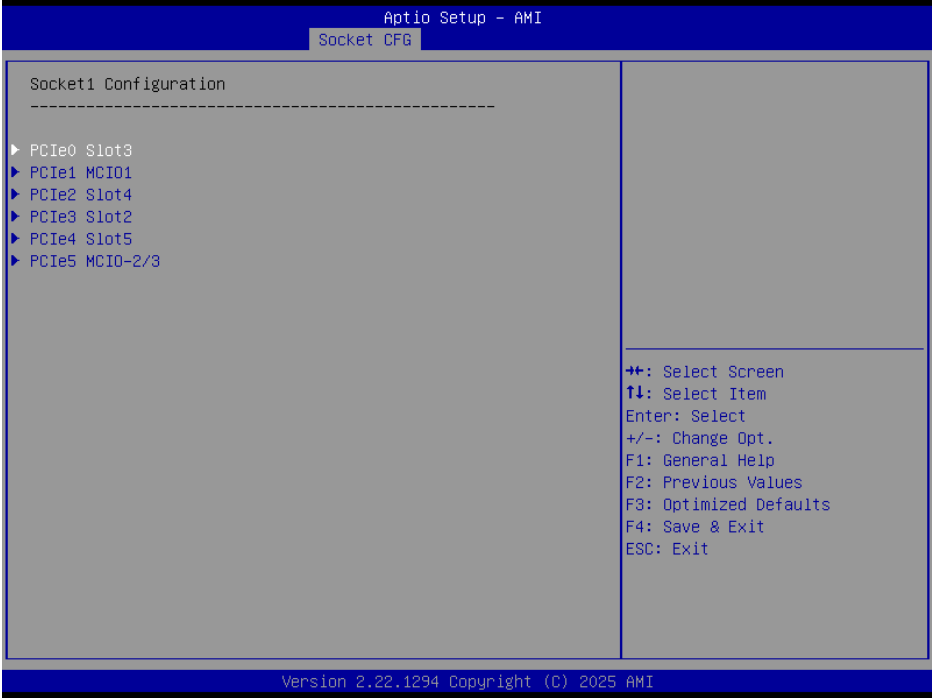


4.6.4.3.2.1 PCI Express 0

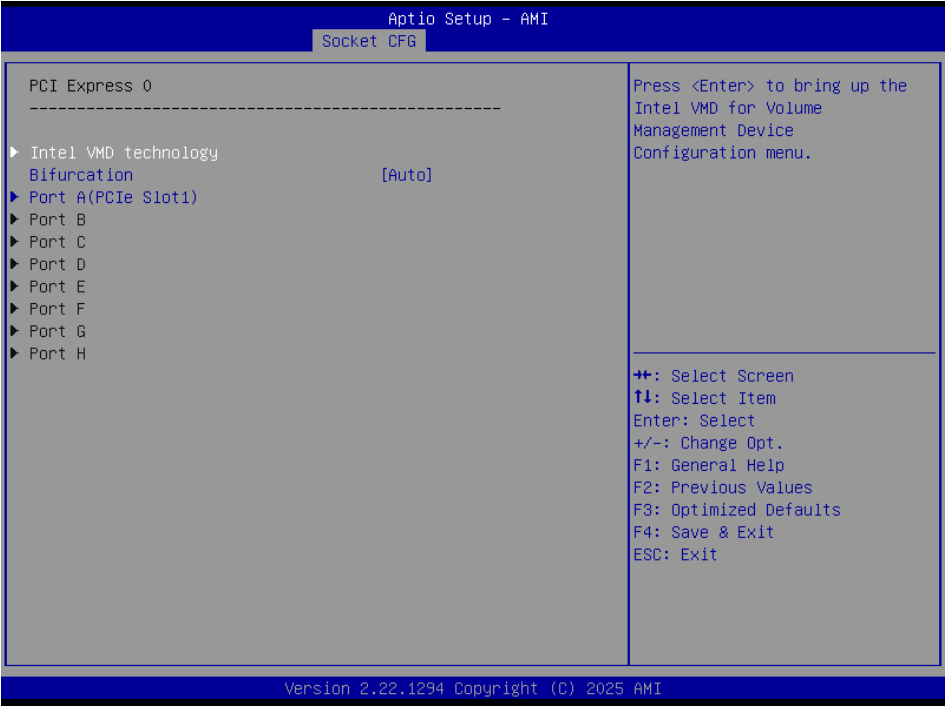

Item	Option	Description
Bifurcation	Auto[Default]	Select PCIe port Bifurcation for selected slot(s) Port Format: xGxExCxA The port can further be x2x2 Disable-disable all PCIe Lanes and the controller.
	x4x4x4x4	
	x4x4x_x8	
	x_x8x4x4	
	x_x8x_x8	
	x_x_x_x16	
	x2x2x4x_x8	
	x4x2x2x_x8	
	x_x8x2x2x4	
	x2x2x4x4x4	
	x4x2x2x4x4	
	x4x4x2x2x4	
	x2x2x2x2x_x8	
	x2x2x2x2x4x4	
	x2x2x4x2x2x4	
	x4x2x2x2x2x4	
	x2x2x2x2x2x2x4	
	x_x8x4x2x2	
	x4x4x4x2x2	
	x_x8x2x2x2x2	
	x2x2x4x4x2x2	
	x4x2x2x4x2x2	
	x4x4x2x2x2x2	
	x2x2x2x2x4x2x2	
	x2x2x4x2x2x2x2	
	x4x2x2x2x2x2x2	
	x2x2x2x2x2x2x2x2	

4.6.4.3.2.1.1 Intel VMD technology


Please refer to 4.6.4.3.1.1.1 for more information.

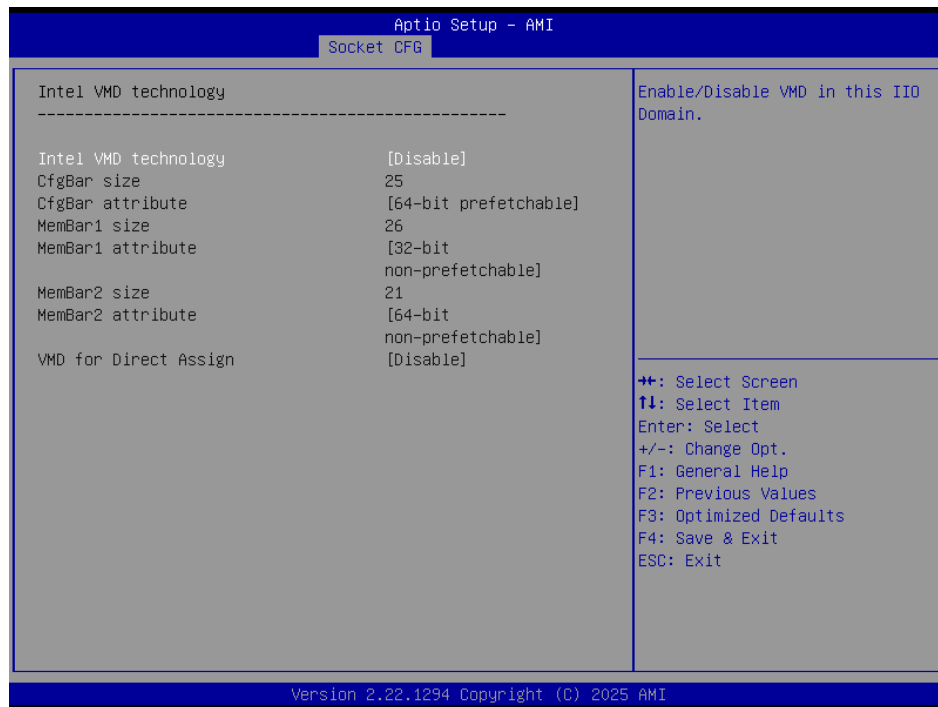


Item	Option	Description
Intel VMD technology	Disabled[Default] Enabled	Intel VMD technology

4.6.4.3.2.1.2 Port A ~ Port H

Please refer to 4.6.4.3.1.1.2 for more information.

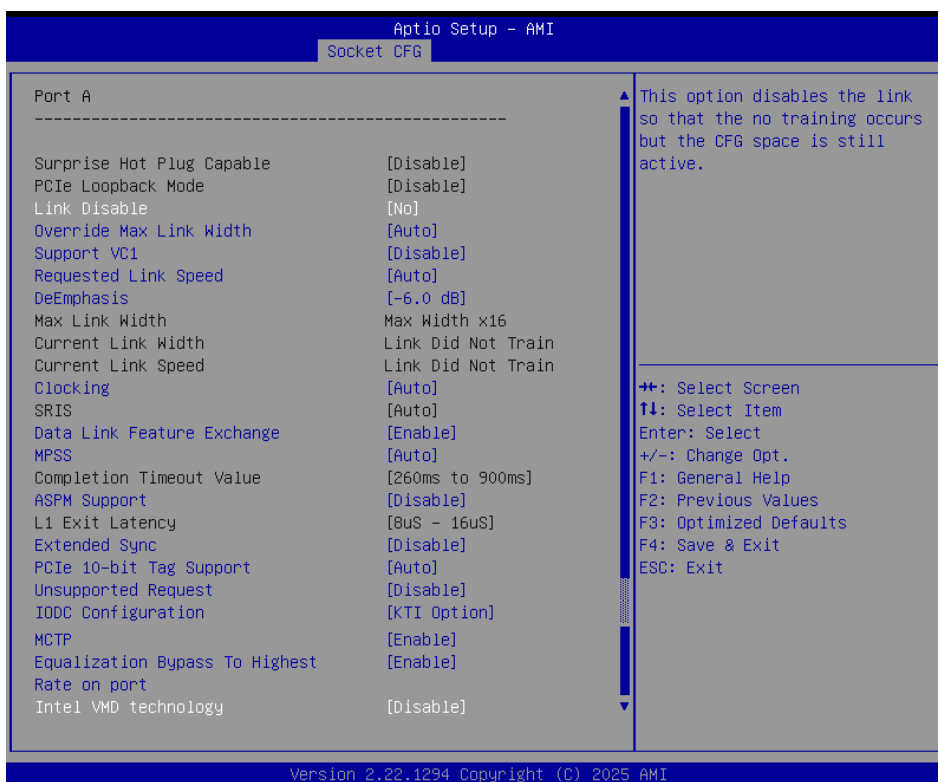


4.6.4.3.2.2 PCI Express 1

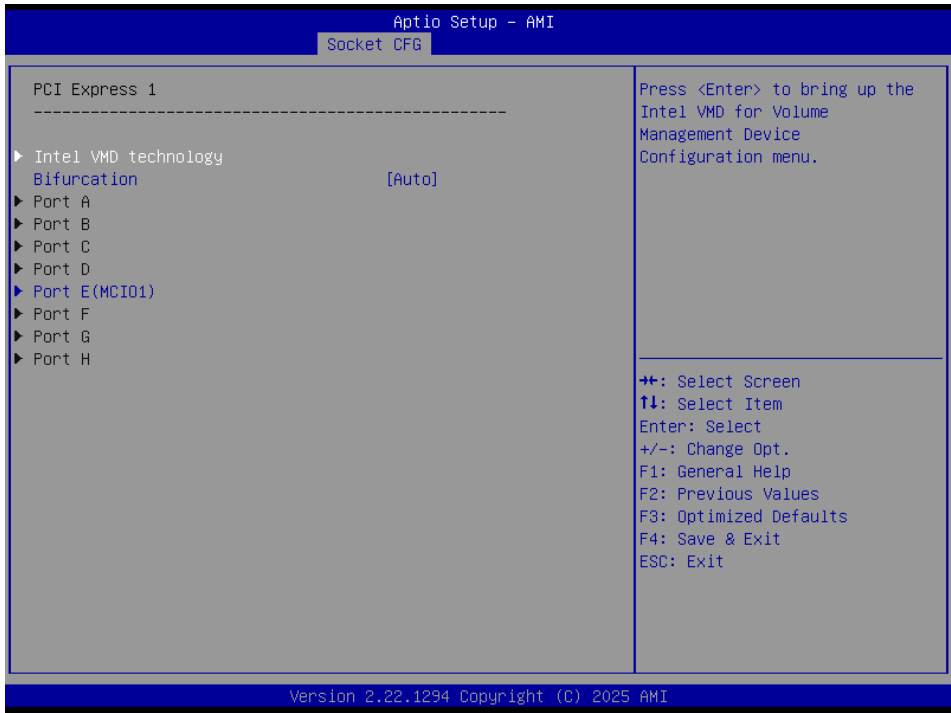

Item	Option	Description
Bifurcation	Auto[Default]	Select PCIe port Bifurcation for selected slot(s) Port Format: xGxExCxA The port can further be x2x2 Disable-disable all PCIe Lanes and the controller.
	x4x4x4x4	
	x4x4x_x8	
	x_x8x4x4	
	x_x8x_x8	
	x_x_x_x16	
	x2x2x4x_x8	
	x4x2x2x_x8	
	x_x8x2x2x4	
	x2x2x4x4x4	
	x4x2x2x4x4	
	x4x4x2x2x4	
	x2x2x2x2x_x8	
	x2x2x2x2x4x4	
	x2x2x4x2x2x4	
	x4x2x2x2x2x4	
	x2x2x2x2x2x2x4	
	x_x8x4x2x2	
	x4x4x4x2x2	
	x_x8x2x2x2x2	
	x2x2x4x4x2x2	
	x4x2x2x4x2x2	
	x4x4x2x2x2x2	
	x2x2x2x2x4x2x2	
	x2x2x4x2x2x2x2	
	x4x2x2x2x2x2x2	
	x2x2x2x2x2x2x2x2	

4.6.4.3.2.2.1 Intel VMD technology


Please refer to 4.6.4.3.1.1.1 for more information.

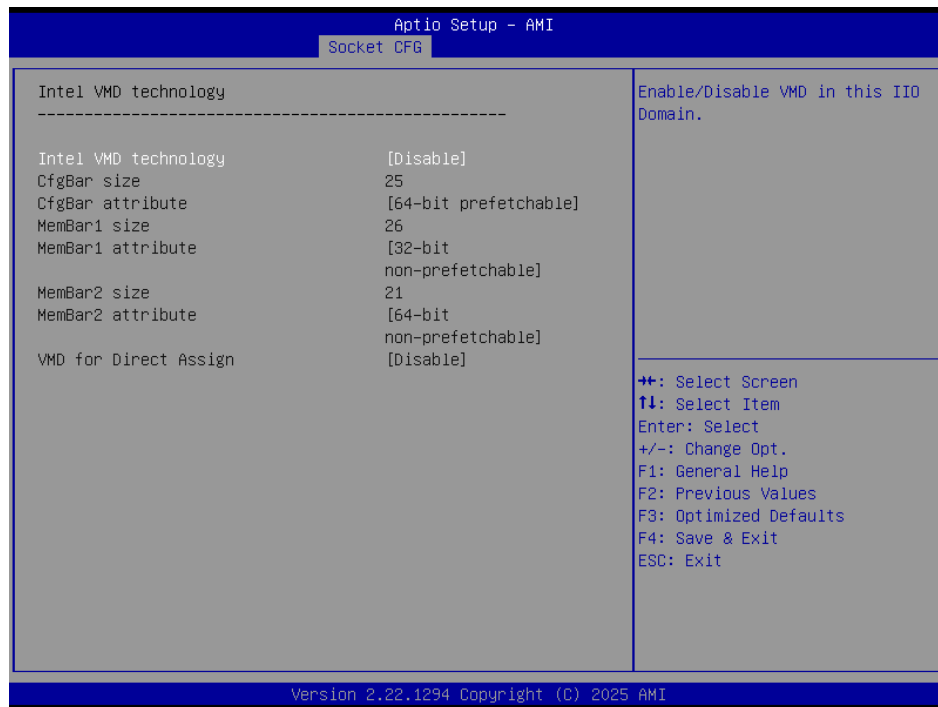


Item	Option	Description
Intel VMD technology	Disabled[Default] Enabled	Intel VMD technology

4.6.4.3.2.2.2 Port A ~ Port H

Please refer to 4.6.4.3.1.1.2 for more information.

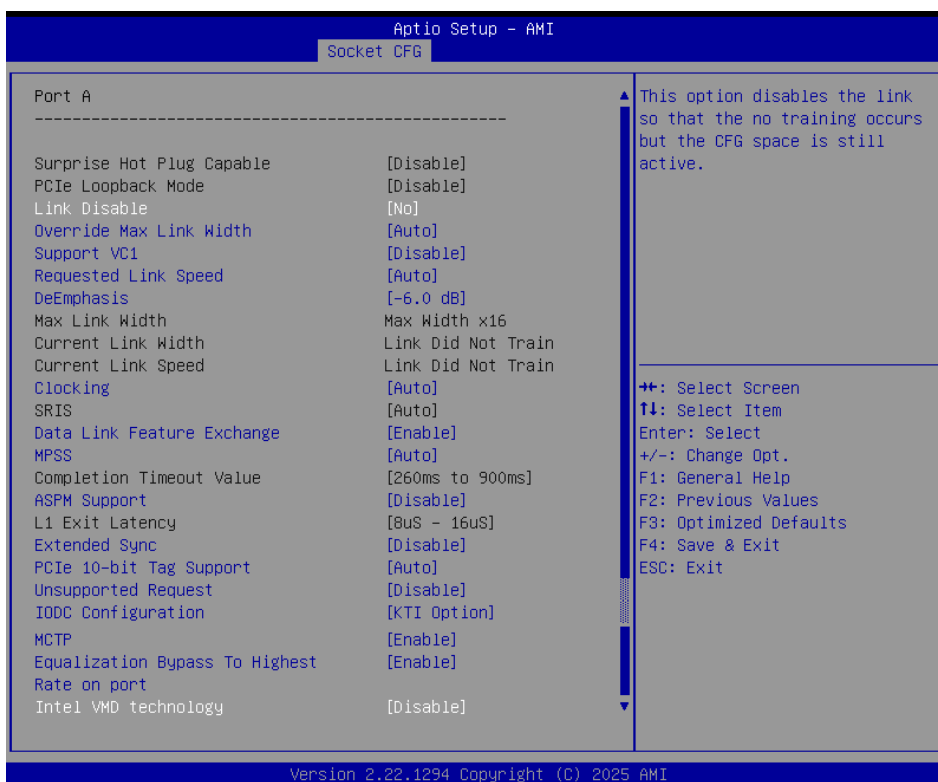


4.6.4.3.2.3 PCI Express 2

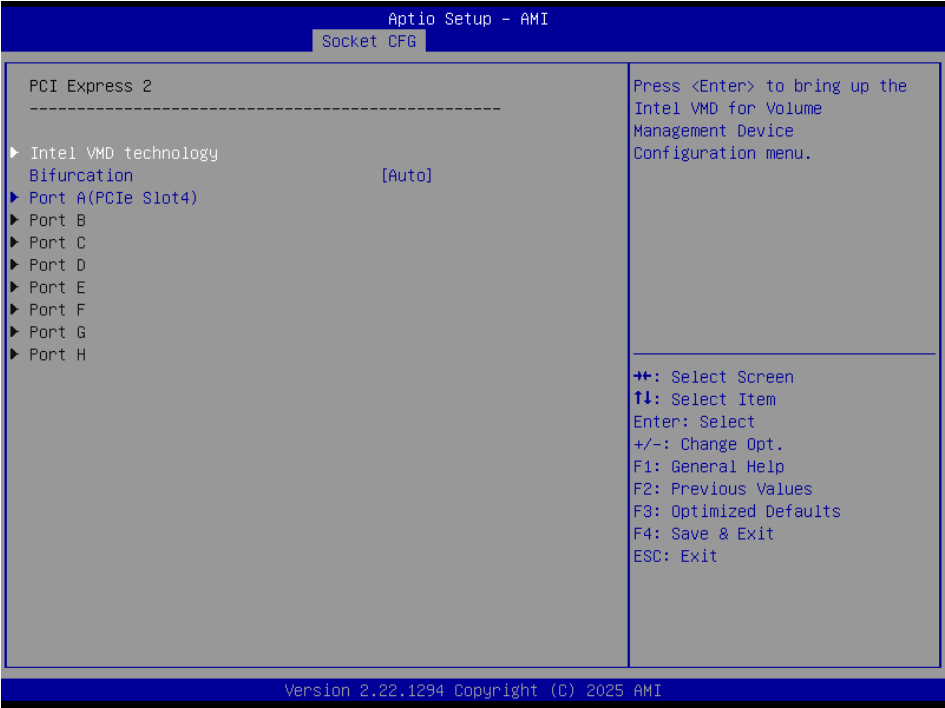

Item	Option	Description
Bifurcation	Auto[Default]	Select PCIe port Bifurcation for selected slot(s) Port Format: xGxExCxA The port can further be x2x2 Disable-disable all PCIe Lanes and the controller.
	x4x4x4x4	
	x4x4x_x8	
	x_x8x4x4	
	x_x8x_x8	
	x_x_x_x16	
	x2x2x4x_x8	
	x4x2x2x_x8	
	x_x8x2x2x4	
	x2x2x4x4x4	
	x4x2x2x4x4	
	x4x4x2x2x4	
	x2x2x2x2x_x8	
	x2x2x2x2x4x4	
	x2x2x4x2x2x4	
	x4x2x2x2x2x4	
	x2x2x2x2x2x2x4	
	x_x8x4x2x2	
	x4x4x4x2x2	
	x_x8x2x2x2x2	
	x2x2x4x4x2x2	
	x4x2x2x4x2x2	
	x4x4x2x2x2x2	
	x2x2x2x2x4x2x2	
	x2x2x4x2x2x2x2	
	x4x2x2x2x2x2x2	
	x2x2x2x2x2x2x2x2	

4.6.4.3.2.3.1 Intel VMD technology


Please refer to 4.6.4.3.1.1.1 for more information.

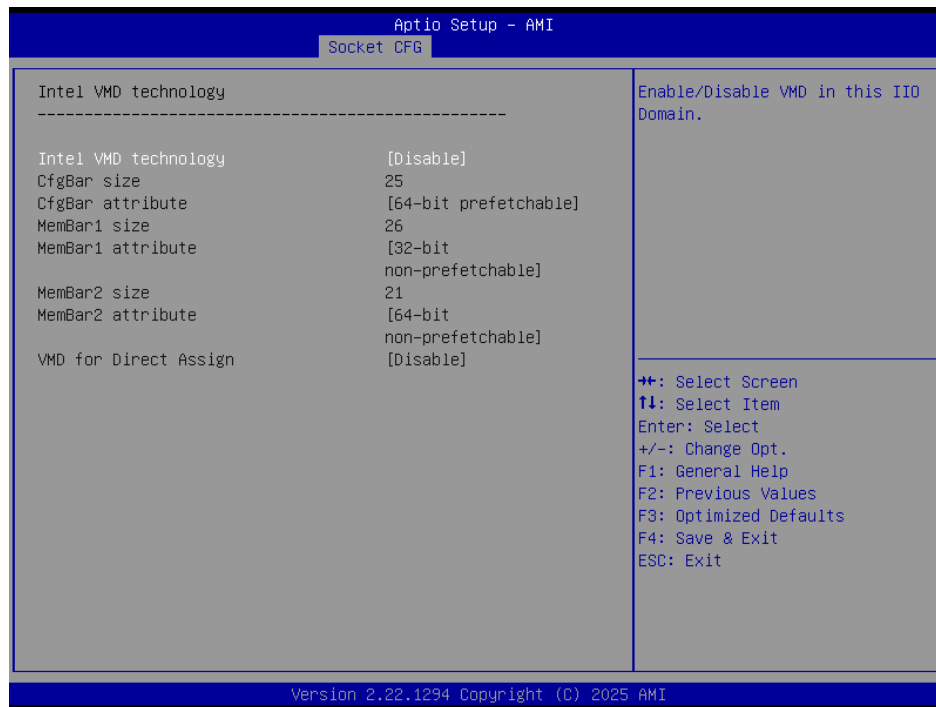


Item	Option	Description
Intel VMD technology	Disabled[Default] Enabled	Intel VMD technology

4.6.4.3.2.3.2 Port A ~ Port H

Please refer to 4.6.4.3.1.1.2 for more information.

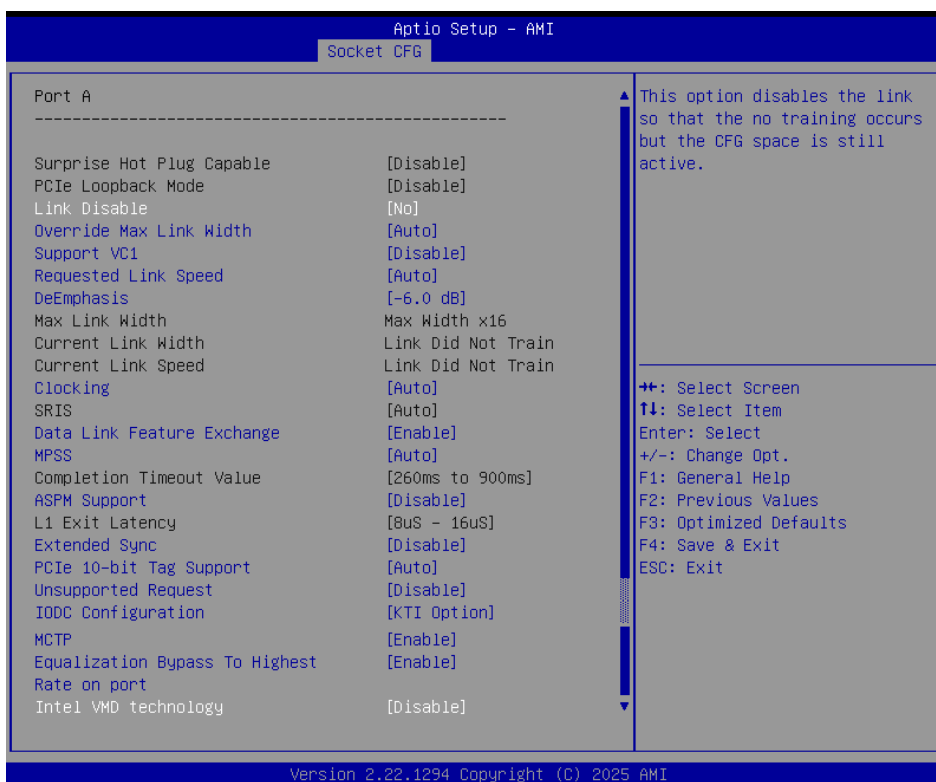


4.6.4.3.2.4 PCI Express 3

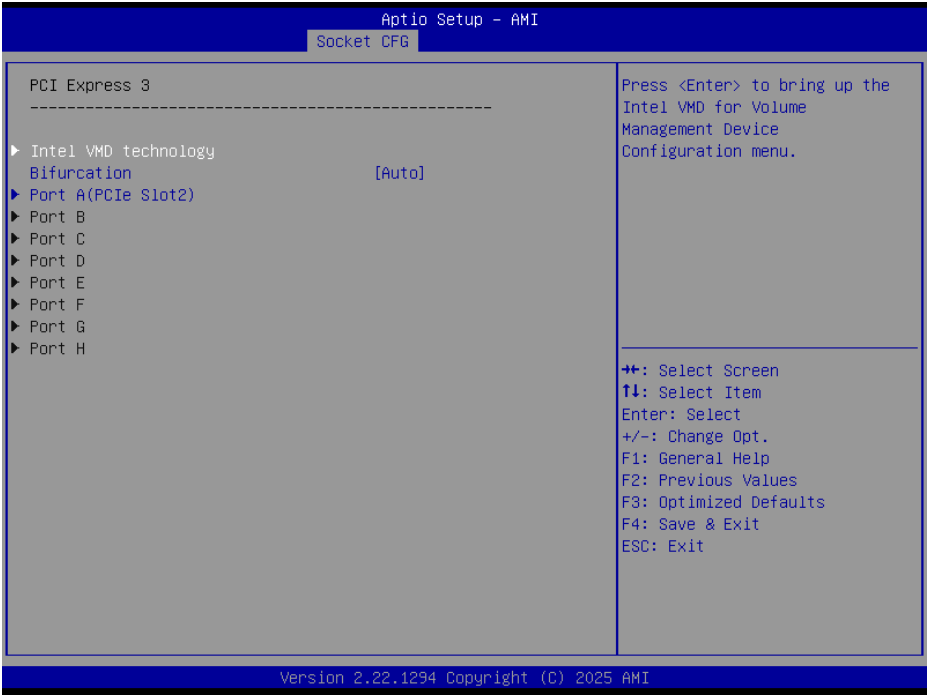

Item	Option	Description
Bifurcation	Auto[Default]	Select PCIe port Bifurcation for selected slot(s) Port Format: xGxExCxA The port can further be x2x2 Disable-disable all PCIe Lanes and the controller.
	x4x4x4x4	
	x4x4x_x8	
	x_x8x4x4	
	x_x8x_x8	
	x_x_x_x16	
	x2x2x4x_x8	
	x4x2x2x_x8	
	x_x8x2x2x4	
	x2x2x4x4x4	
	x4x2x2x4x4	
	x4x4x2x2x4	
	x2x2x2x2x_x8	
	x2x2x2x2x4x4	
	x2x2x4x2x2x4	
	x4x2x2x2x2x4	
	x2x2x2x2x2x2x4	
	x_x8x4x2x2	
	x4x4x4x2x2	
	x_x8x2x2x2x2	
	x2x2x4x4x2x2	
	x4x2x2x4x2x2	
	x4x4x2x2x2x2	
	x2x2x2x2x4x2x2	
	x2x2x4x2x2x2x2	
	x4x2x2x2x2x2x2	
	x2x2x2x2x2x2x2x2	

4.6.4.3.2.4.1 Intel VMD technology


Please refer to 4.6.4.3.1.1.1 for more information.

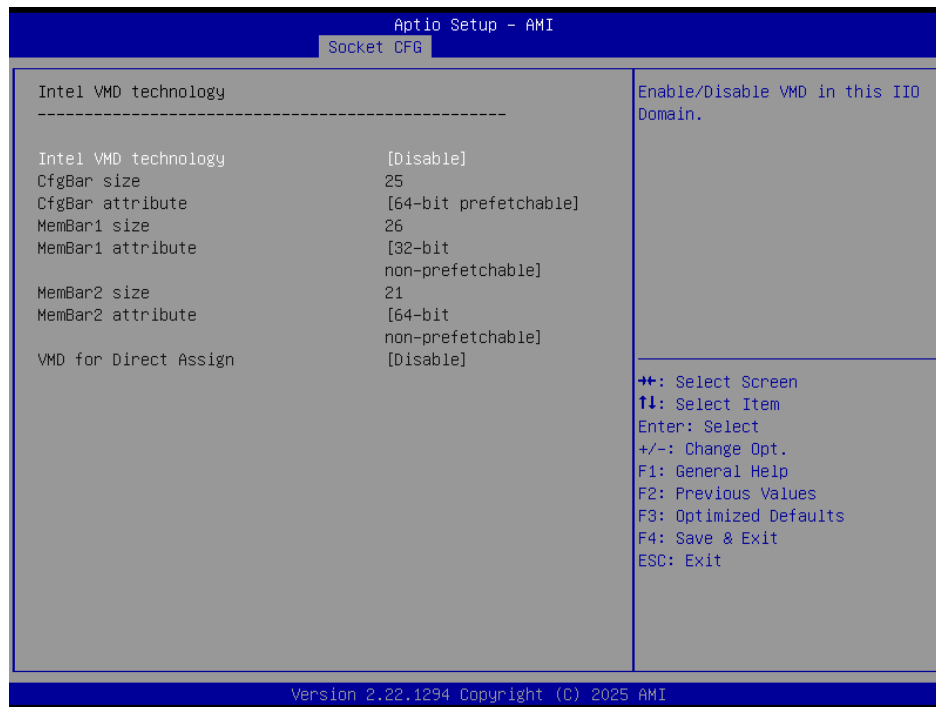


Item	Option	Description
Intel VMD technology	Disabled[Default] Enabled	Intel VMD technology

4.6.4.3.2.4.2 Port A ~ Port H

Please refer to 4.6.4.3.1.1.2 for more information.

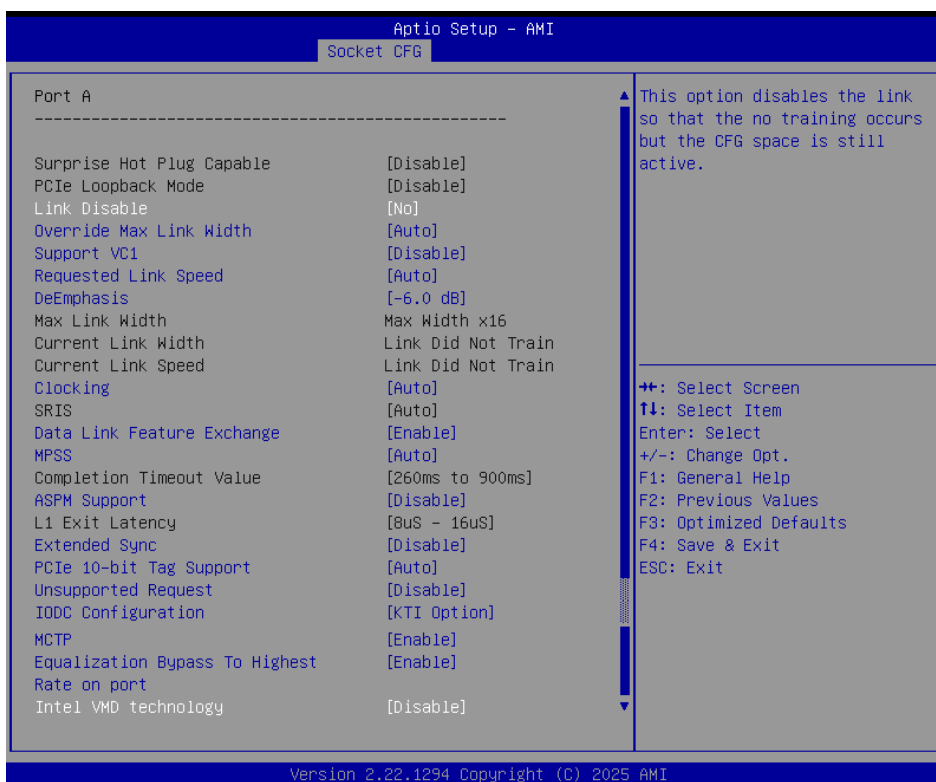


4.6.4.3.2.5 PCI Express 4

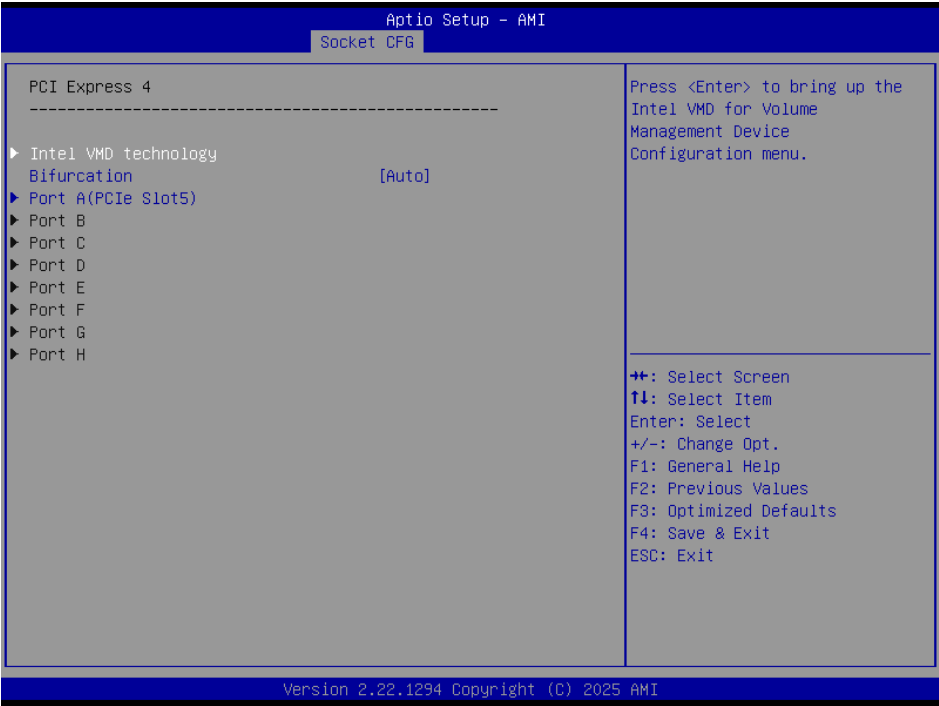

Item	Option	Description
Bifurcation	Auto[Default]	Select PCIe port Bifurcation for selected slot(s) Port Format: xGxExCxA The port can further be x2x2 Disable-disable all PCIe Lanes and the controller.
	x4x4x4x4	
	x4x4x_x8	
	x_x8x4x4	
	x_x8x_x8	
	x_x_x_x16	
	x2x2x4x_x8	
	x4x2x2x_x8	
	x_x8x2x2x4	
	x2x2x4x4x4	
	x4x2x2x4x4	
	x4x4x2x2x4	
	x2x2x2x2x_x8	
	x2x2x2x2x4x4	
	x2x2x4x2x2x4	
	x4x2x2x2x2x4	
	x2x2x2x2x2x2x4	
	x_x8x4x2x2	
	x4x4x4x2x2	
	x_x8x2x2x2x2	
	x2x2x4x4x2x2	
	x4x2x2x4x2x2	
	x4x4x2x2x2x2	
	x2x2x2x2x4x2x2	
	x2x2x4x2x2x2x2	
	x4x2x2x2x2x2x2	
	x2x2x2x2x2x2x2x2	

4.6.4.3.2.5.1 Intel VMD technology


Please refer to 4.6.4.3.1.1.1 for more information.

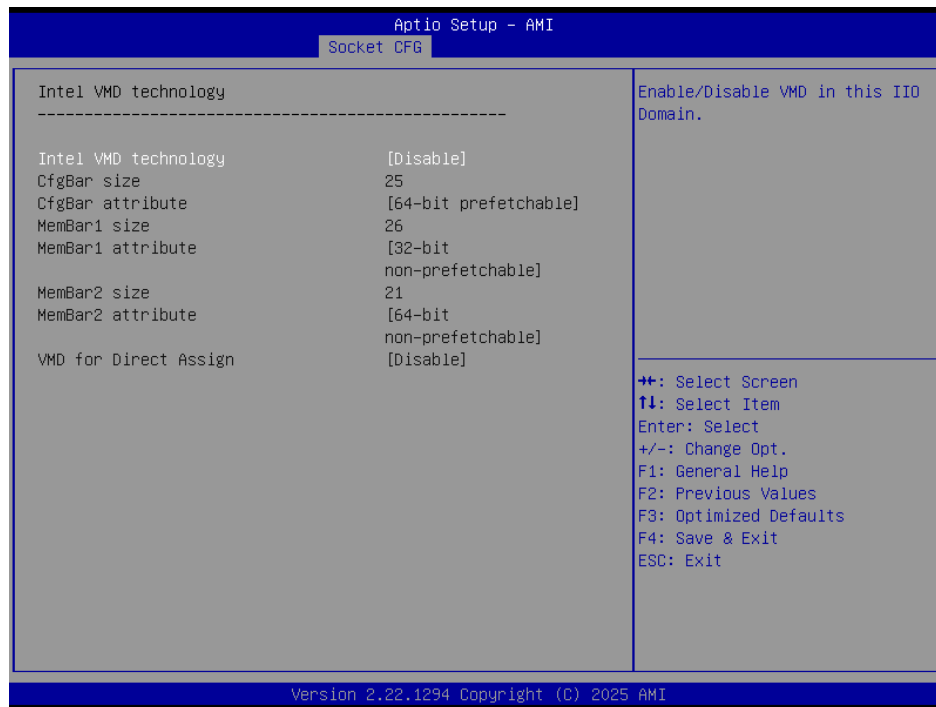


Item	Option	Description
Intel VMD technology	Disabled[Default] Enabled	Intel VMD technology

4.6.4.3.2.5.2 Port A ~ Port H

Please refer to 4.6.4.3.1.1.2 for more information.

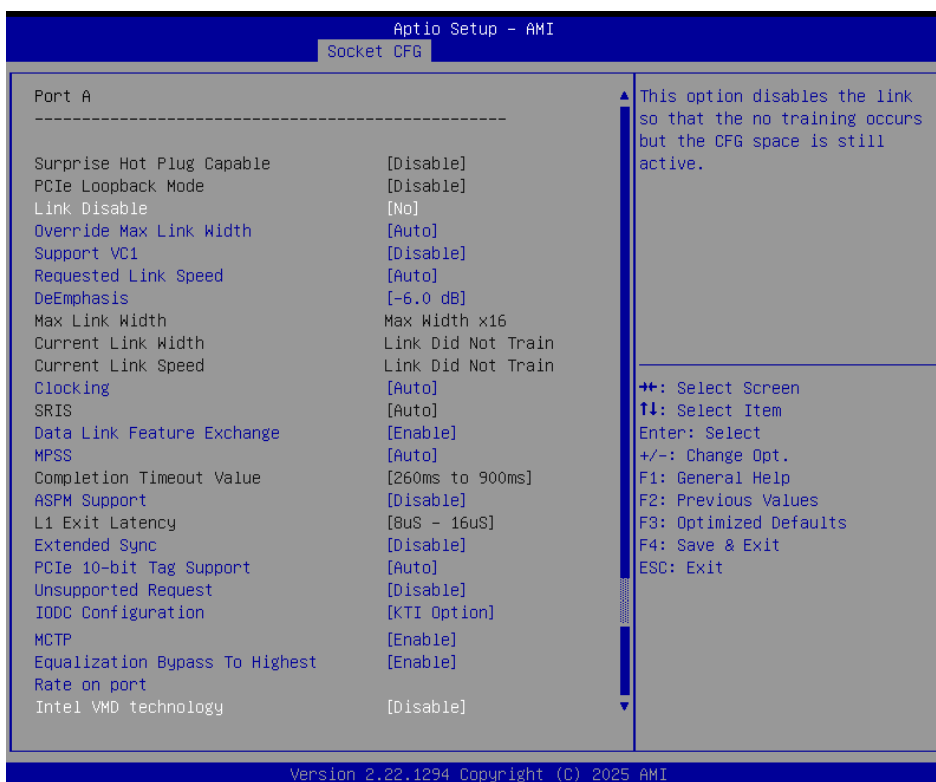


4.6.4.3.2.6 PCI Express 5

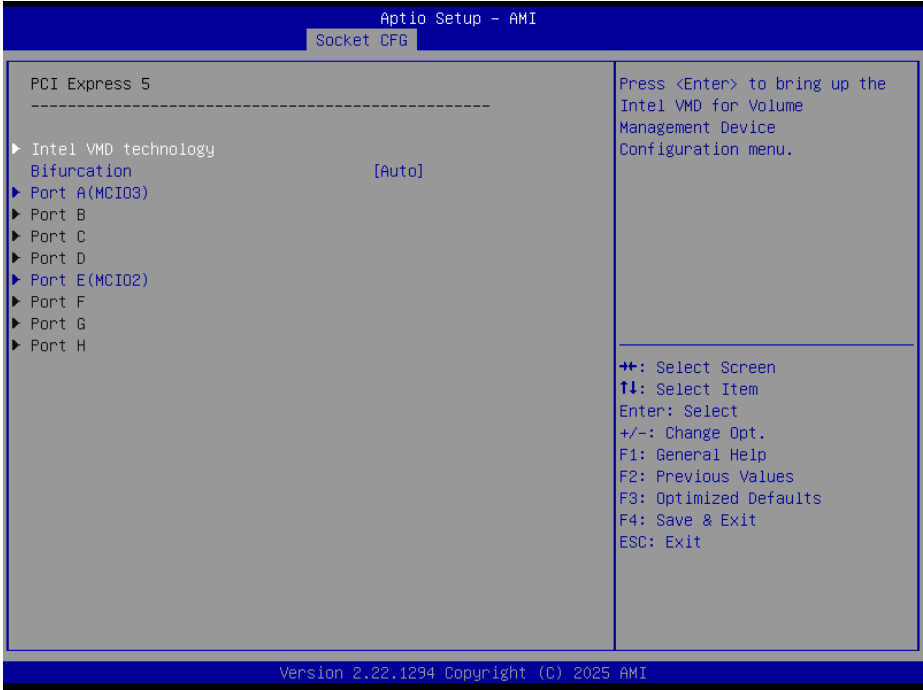

Item	Option	Description
Bifurcation	Auto[Default]	Select PCIe port Bifurcation for selected slot(s) Port Format: xGxExCxA The port can further be x2x2 Disable-disable all PCIe Lanes and the controller.
	x4x4x4x4	
	x4x4x_x8	
	x_x8x4x4	
	x_x8x_x8	
	x_x_x_x16	
	x2x2x4x_x8	
	x4x2x2x_x8	
	x_x8x2x2x4	
	x2x2x4x4x4	
	x4x2x2x4x4	
	x4x4x2x2x4	
	x2x2x2x2x_x8	
	x2x2x2x2x4x4	
	x2x2x4x2x2x4	
	x4x2x2x2x2x4	
	x2x2x2x2x2x2x4	
	x_x8x4x2x2	
	x4x4x4x2x2	
	x_x8x2x2x2x2	
	x2x2x4x4x2x2	
	x4x2x2x4x2x2	
	x4x4x2x2x2x2	
	x2x2x2x2x4x2x2	
	x2x2x4x2x2x2x2	
	x4x2x2x2x2x2x2	
	x2x2x2x2x2x2x2x2	

4.6.4.3.2.6.1 Intel VMD technology


Please refer to 4.6.4.3.1.1.1 for more information.

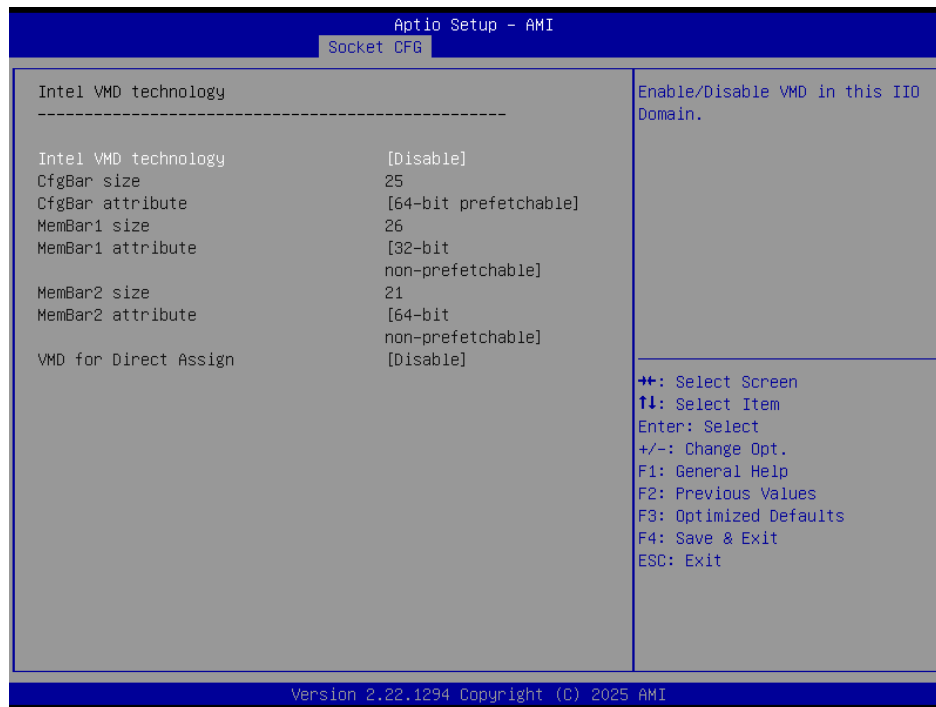


Item	Option	Description
Intel VMD technology	Disabled[Default] Enabled	Intel VMD technology

4.6.4.3.2.6.2 Port A ~ Port H

Please refer to 4.6.4.3.1.1.2 for more information.

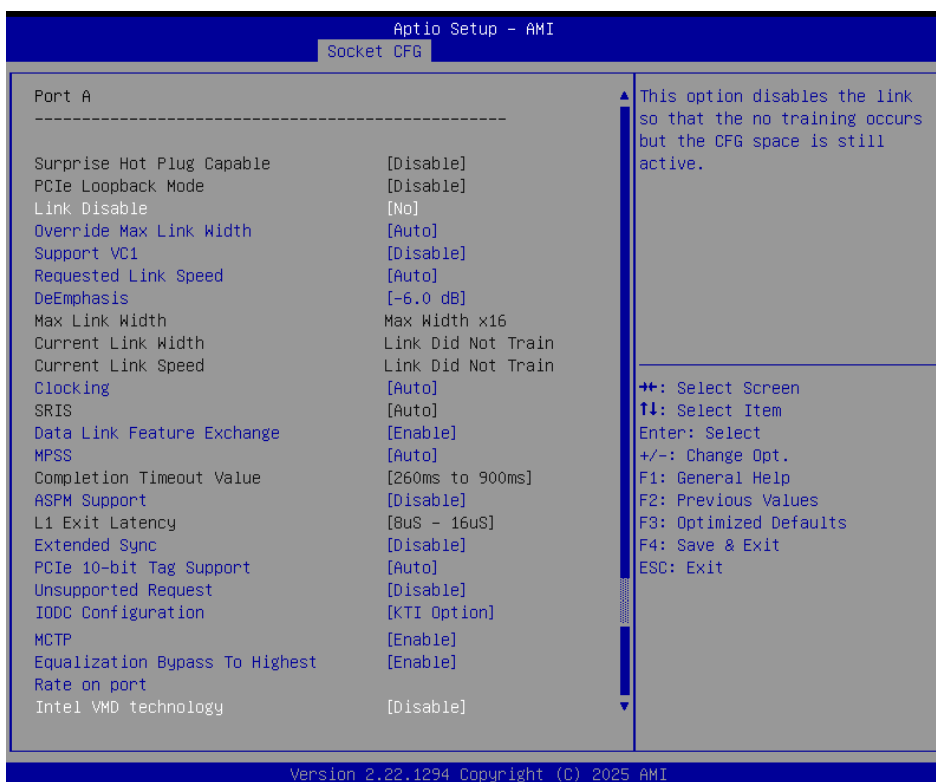


4.6.4.3.3 Global Configuration

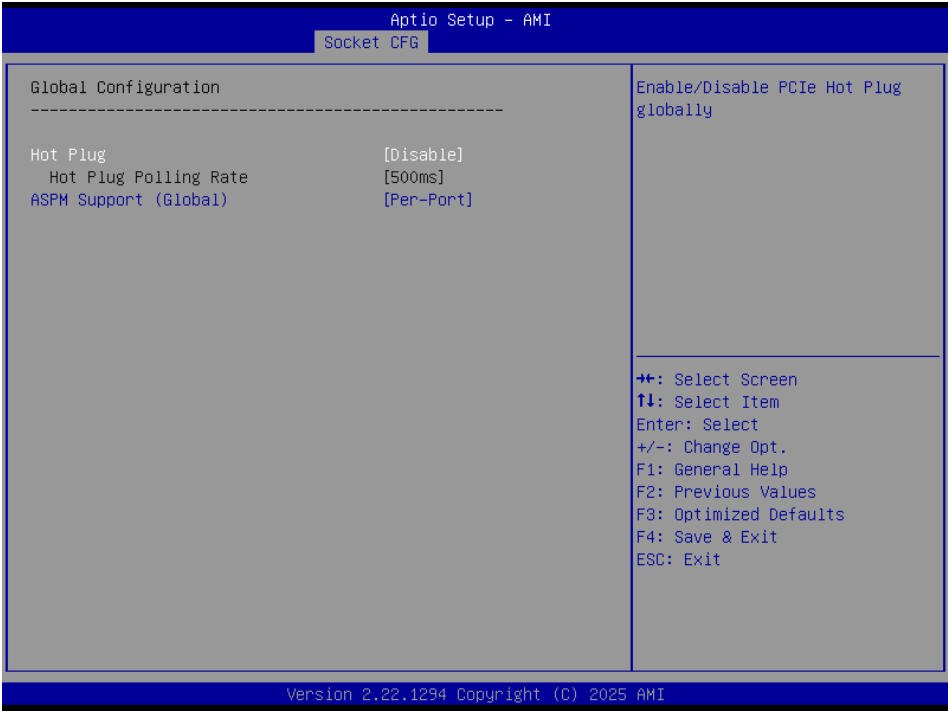


Item	Options	Description
Hot Plug	Enable Disable[Default]	Hot Plug.
ASPM Support (Global)	Disable Per-Port[Default]	This option can disable ASPM support for all PCIe root ports.

4.6.4.3.4 Intel VMD technology

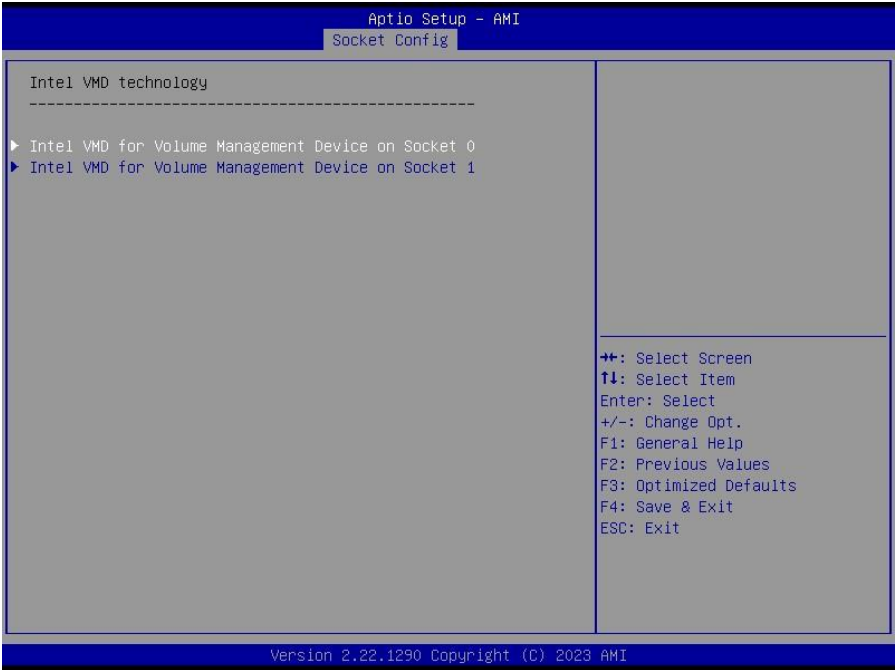


4.6.4.3.4.1 Intel VMD for Volume Management Device on Socket 0

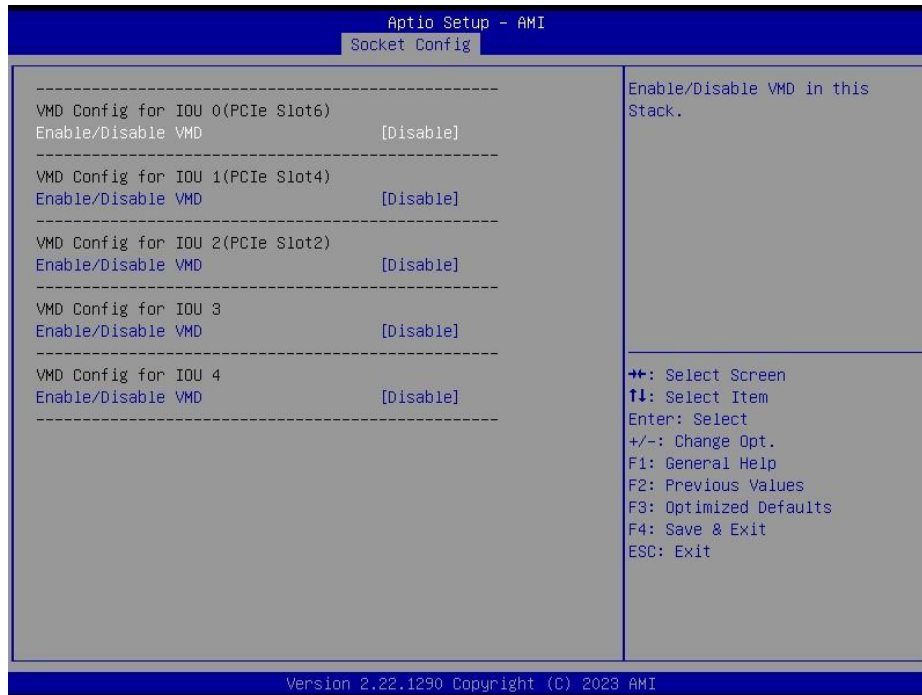


Item	Option	Description
Enable/Disable VMD	Disable[Default] Enable	Enable/Disable VMD in this Stack.

4.6.4.3.4.2 Intel VMD for Volume Management Device on Socket 1

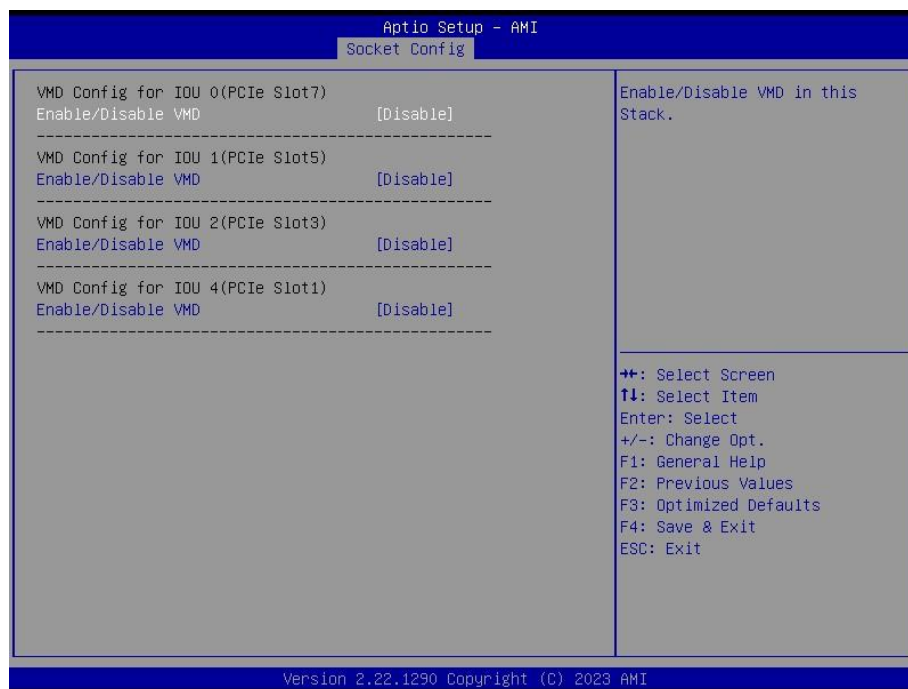


Item	Option	Description
Enable/Disable VMD	Disable[Default] Enable	Enable/Disable VMD in this Stack.

4.6.4.4 Advanced Power Management Configuration

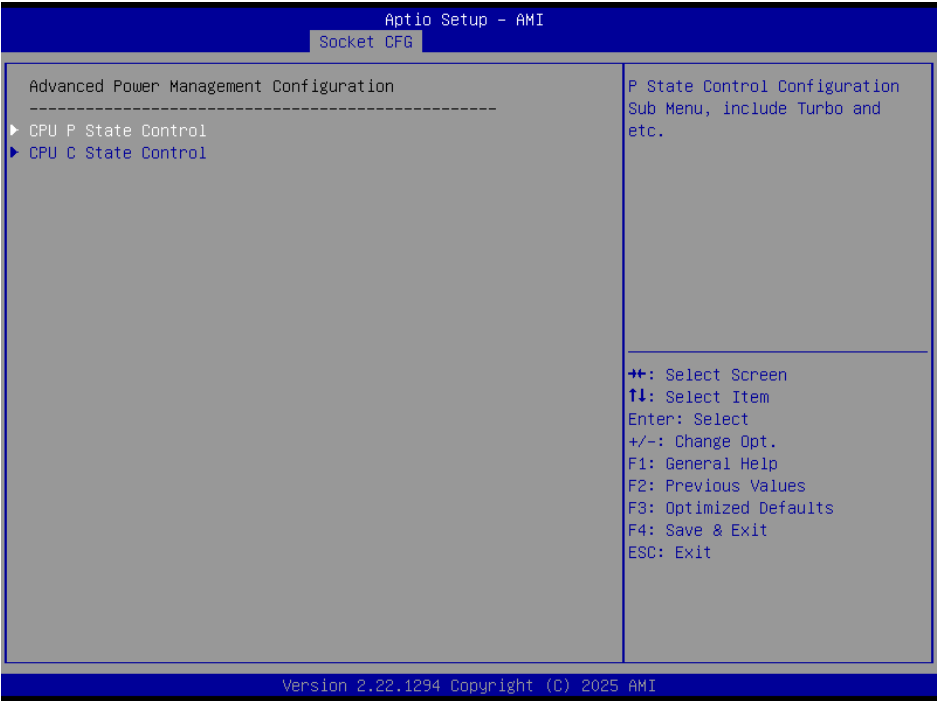


4.6.4.4.1 CPU P State Control

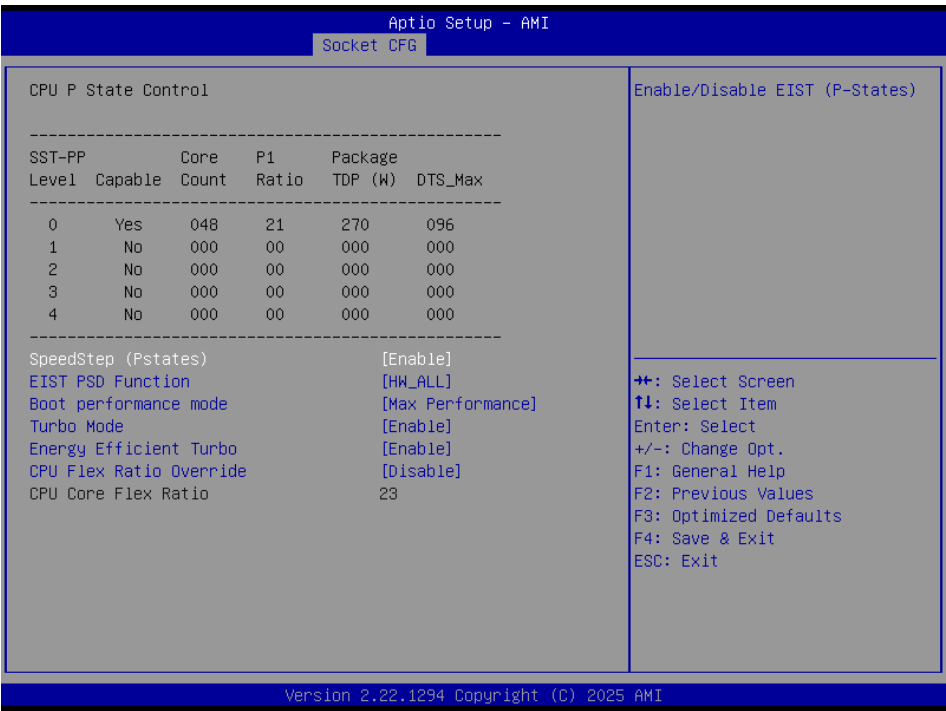

Item	Option	Description
SpeedStep (Pstates)	Disable Enable[Default]	Enable/Disable EIST (P-States).
EIST PSD Function	HW_ALL[Default] SW_ALL	Choose HW_ALL/SW_ALL in _PSD return.
Boot performance mode	Max Performance[Default] Max Efficient	Select the performance state that the BIOS will set before OS hand off.



	Set by Intel Node Manager	
Turbo Mode	Disable Enable[Default]	Enable/Disable processor Turbo Mode (requires EMTTM enabled too).
Energy Efficient Turbo	Enable[Default] Disable	Energy Efficient Turbo Disable, MSR 0x1FC[19].
CPU Flex Ratio Override	Disable[Default] Enable	Enable/Disable CPU Flex Ratio Programming.


4.6.4.4.2 CPU C State Control

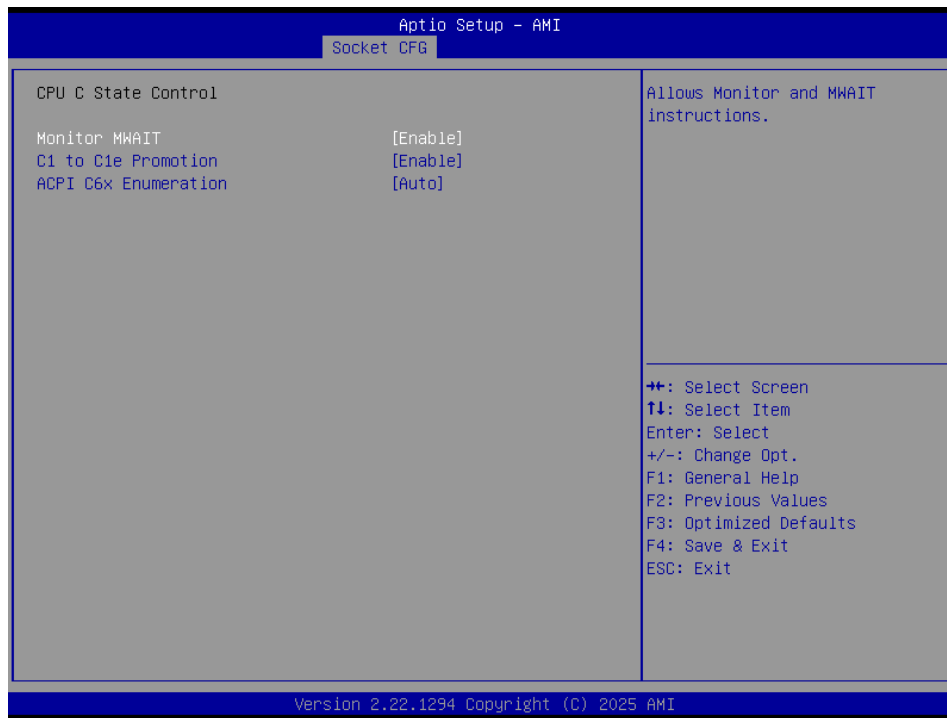

Item	Option	Description
Monitor MWAIT	Disable Enable[Default]	Allows Monitor and MWAIT instructions.
C1 to C1e Promotion	Disable Enable[Default]	Allows CPU to automatically demote to C1. Takes effect after reboot.
ACPI C6x Enumeration	Disable Auto[Default]	ACPI C6x Enumeration.


4.6.5 Server Mgmt

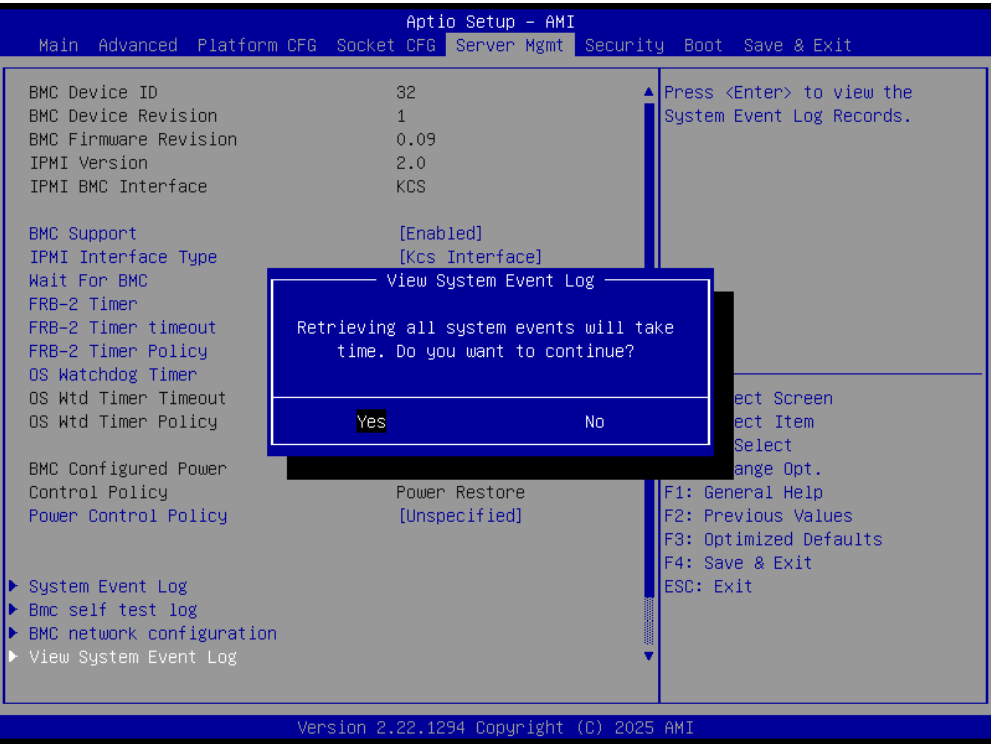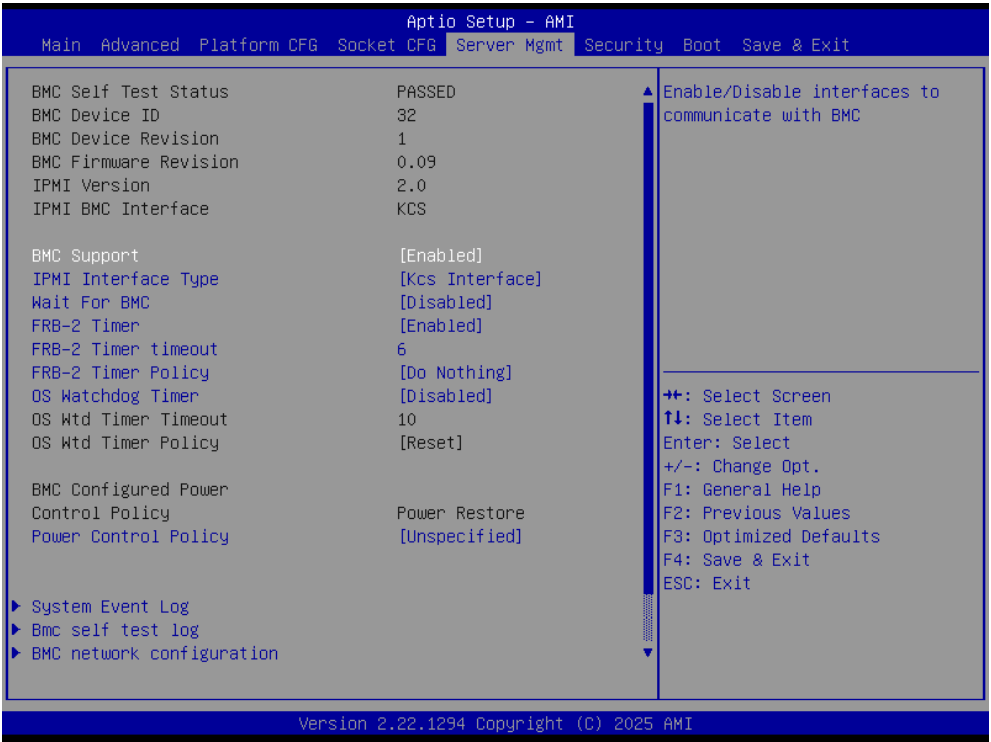

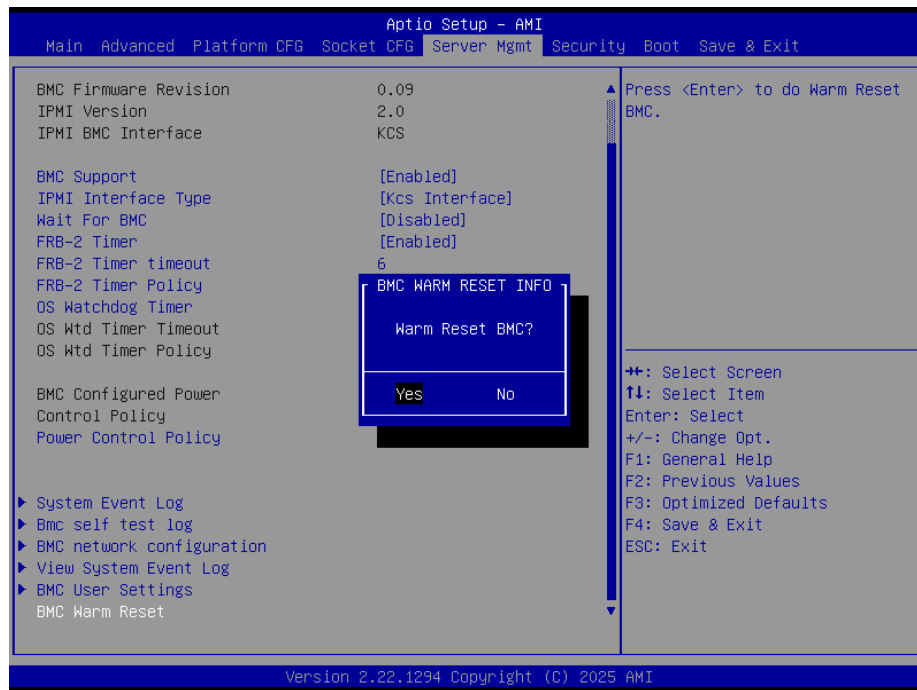

Item	Options	Description
BMC Support	Enabled[Default] Disabled	Enable/Disable interfaces to communicate with BMC.
IPMI Interface Type	Kcs Interface[Default] Ssif Interface Ipmb Interface Usb Interface Oem1 Interface Oem2 Interface	Type of Interface to communicate BMC from HOST.
Wait For BMC	Enabled Disabled[Default]	Wait For BMC response for specified time out. BMC starts at the same time when BIOS starts during AC power ON. It takes around 30 seconds to initialize Host to BMC interfaces.
FRB-2 Timer	Enabled[Default] Disabled	Enable or Disable FRB-2 time (POST timer).
FRB-2 Timer timeout	6	Enter value Between 3 to 6 min for FRB-2 Timer Expiration value.
FRB-2 Timer Policy	Do Nothing[Default] Reset Power Down Power Cycle	Configure how the system should respond if the FRB-2 Timer expires. Not available if FRB-2 Timer is disabled.
OS Watchdog Timer	Enabled Disabled[Default]	If enabled, starts a BIOS timer which can only be shut off by Management Software after the OS loads. Helps determine that the OS successfully loaded or follows the OS Boot Watchdog Timer policy.
Power Control Policy	Do Not PowerUp Last Power State Power Restore Unspecified[Default]	Configure how the system should respond if AC Power is lost, Reset not required as selected Power policy will be set in BMC when policy is saved.

4.6.5.1 System Event Log

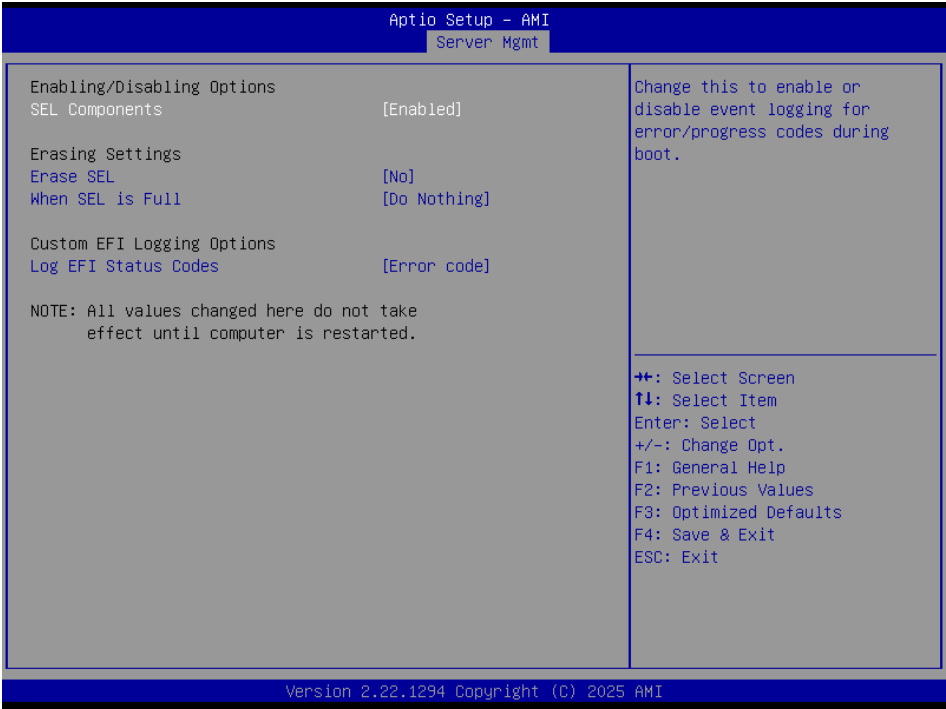


Item	Option	Description
SEL Components	Enabled [Default] Disabled	Change this to enable or disable event logging for error/progress codes during boot.
Erase SEL	No [Default] Yes, On next reset Yes, On every reset	Choose options for erasing SEL.
When SEL is Full	Do Nothing [Default] Erase Immediately Delete Oldest Record	Choose options for reactions to a full SEL.
Log EFI Status Codes	Disabled Both Error code [Default] Progress code	Disable the logging of EFI Status Codes or log only error code or only progress code or both.

4.6.5.2 Bmc self test log




Item	Option	Description
Erase Log	Yes, On every reset[Default] No	Erase Log Options.
When log is full	Clear Log[Default] Do not log any more	Select the action to be taken when log is full.

4.6.5.3 BMC network configuration

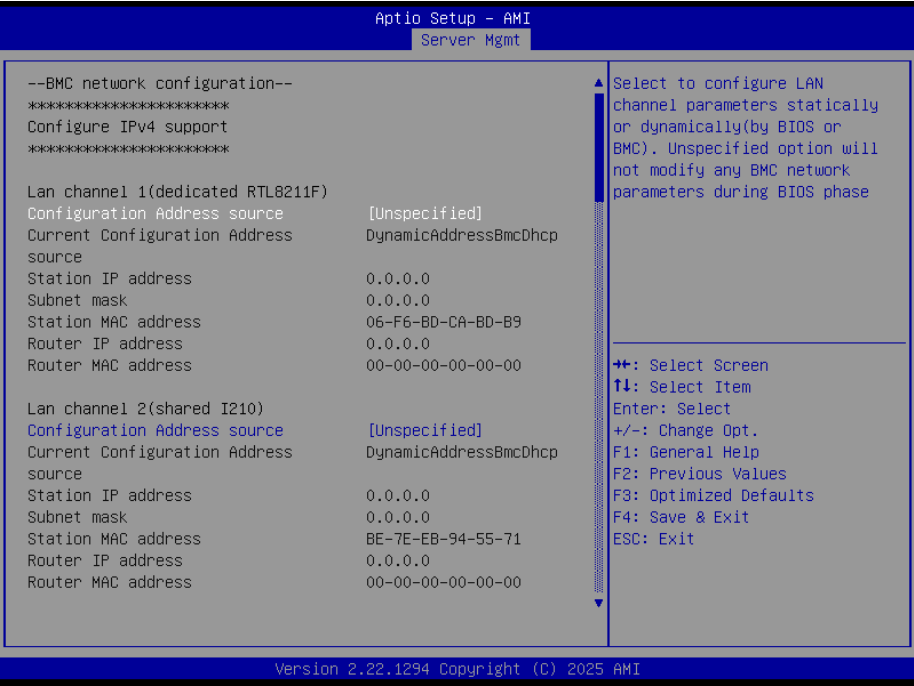

Item	Option	Description
Configuration Address source	Unspecified[Default]	Select configure LAN channel parameters statically or dynamically(by BIOS or BMC). Unspecified option will not modify any BMC network parameters during BIOS phase.
	Static	
	DynamicBmcDhcp	
Configuration Address source	DynamicBmcNonDhcp	Select to configure LAN channel parameters statically or dynamically(by BIOS or BMC). Unspecified option will not modify any BMC network parameters during BIOS phase.
	Unspecified[Default]	
	Static	
Configuration Address source	DynamicBmcDhcp	

4.6.5.4 BMC User Settings

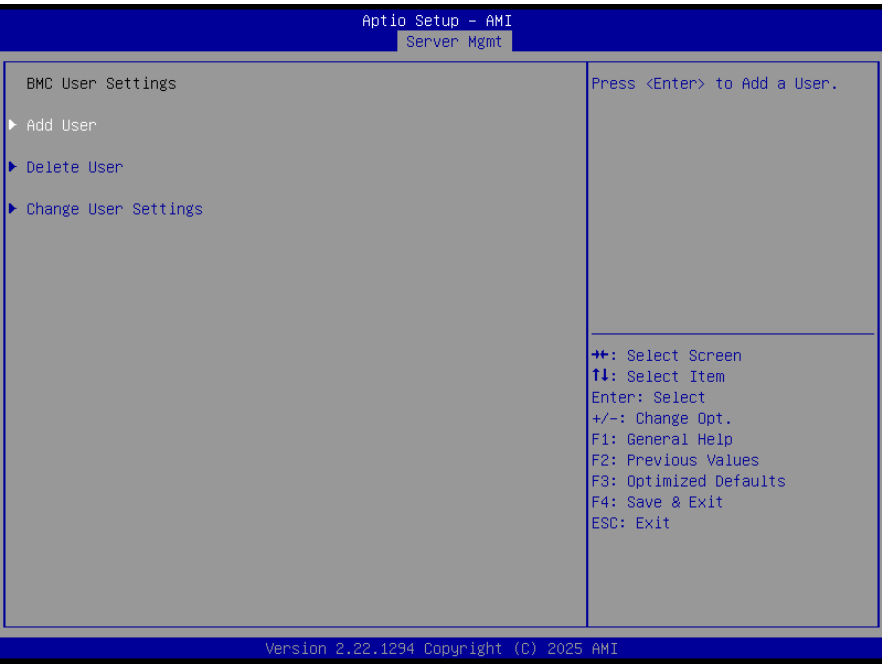

4.6.5.4.1 BMC Add User Details

Aptio Setup - AMI

Server Mgmt

BMC Add User Details

User Name
User Password
User Access [Disabled]
Channel No 0
User Privilege Limit [No Access]

Enter BMC User Name

↔: Select Screen
↑↓: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save & Exit
ESC: Exit

Version 2.22.1294 Copyright (C) 2025 AMI

Item	Description
User Name	Enter BMC User Name.

4.6.5.4.2 BMC Delete User Details

Aptio Setup - AMI

Server Mgmt

BMC Delete User Details

User Name
User Password


Enter BMC User Name

↔: Select Screen
↑↓: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save & Exit
ESC: Exit

Version 2.22.1294 Copyright (C) 2025 AMI


Item	Description
User Name	Enter BMC User Name.


4.6.5.4.3 BMC Change User Settings

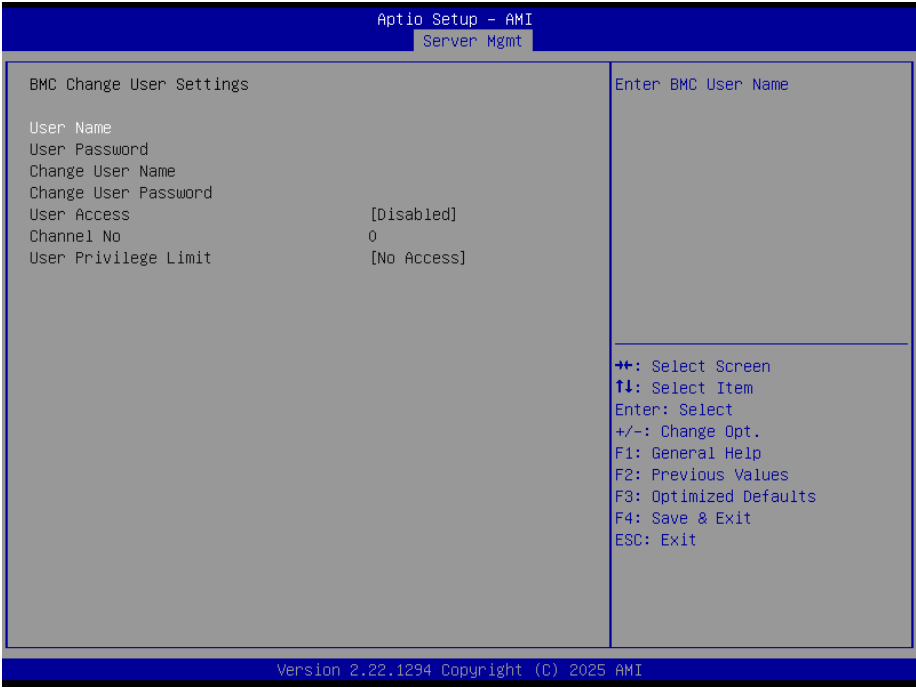

Item	Description
User Name	Enter BMC User Name.

4.6.6 Security

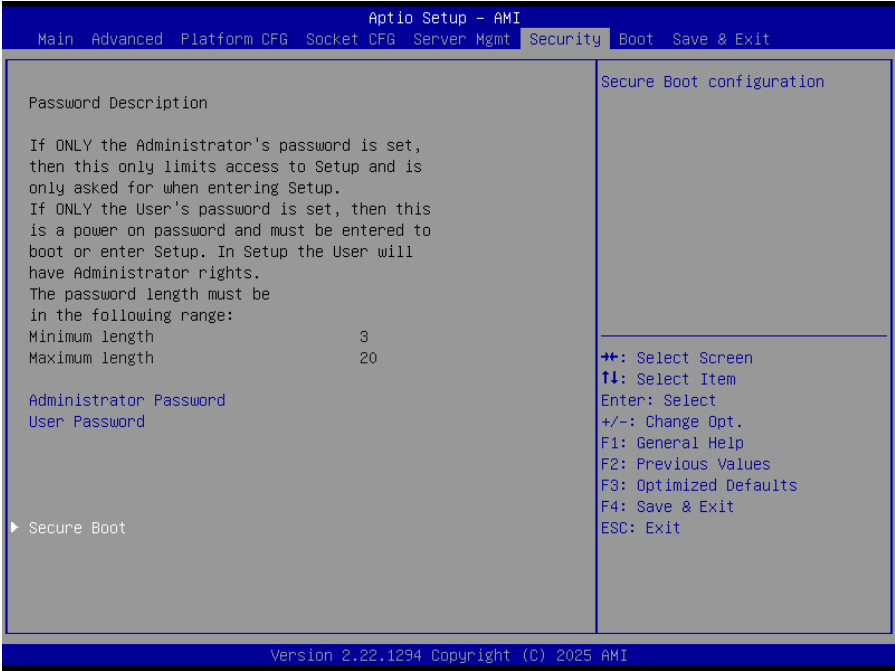

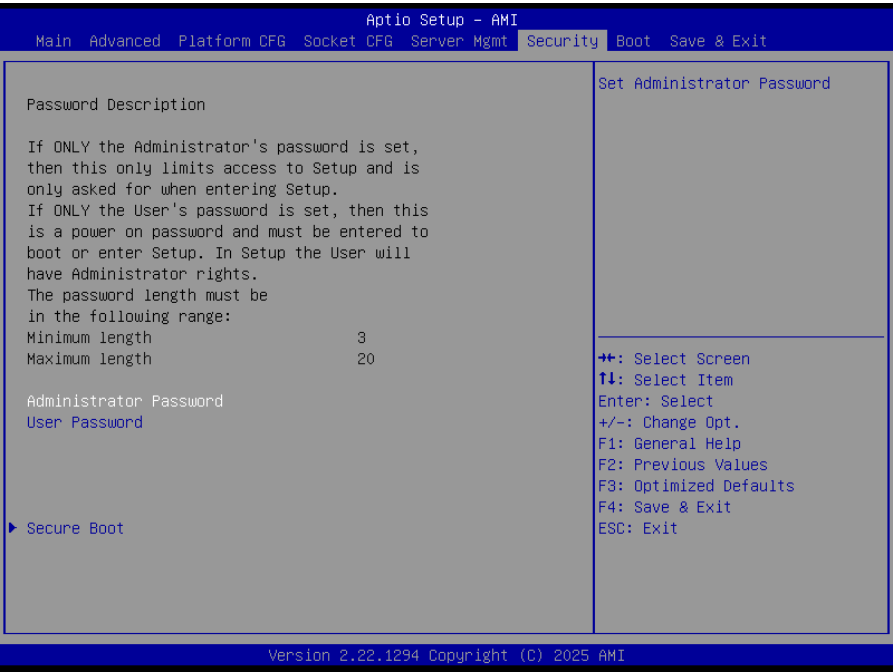

● **Administrator Password**


Set setup Administrator Password

● **User Password**

Set User Password


4.6.6.1 Secure Boot





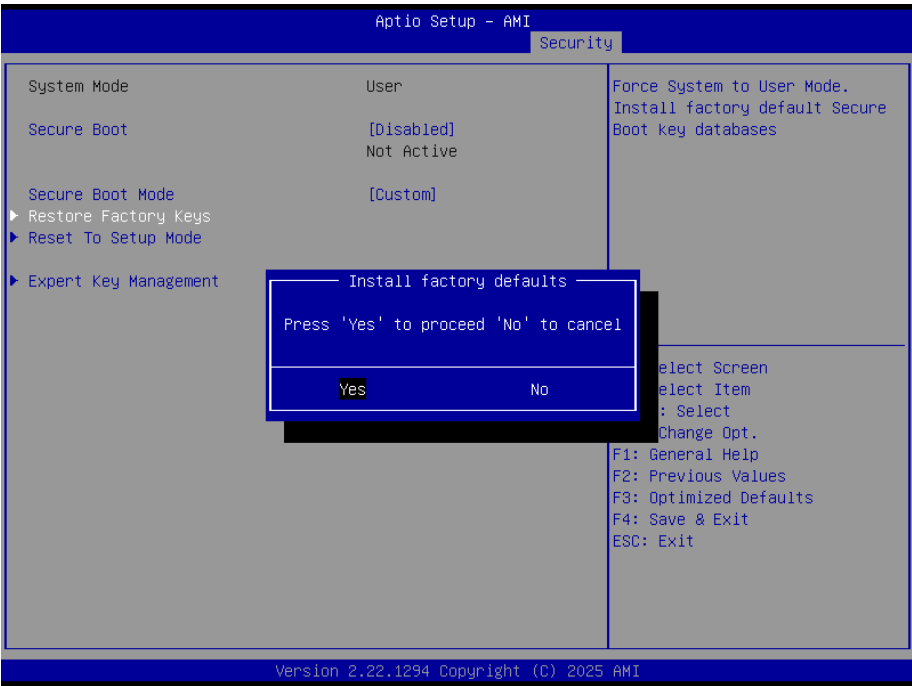


Item	Option	Description
Secure Boot	Disabled[Default] Enabled	Secure Boot feature is Active if Secure Boot is Enabled, Platform Key(PK) is enrolled and the System is in User mode. The mode change requires platform reset.
Secure Boot Mode	Standard[Default] Custom	Secure Boot mode options: Standard or Custom. In Custom mode, Secure Boot Policy variables can be configured by a physically present user without full authentication.

4.6.6.1.1 Expert Key Management

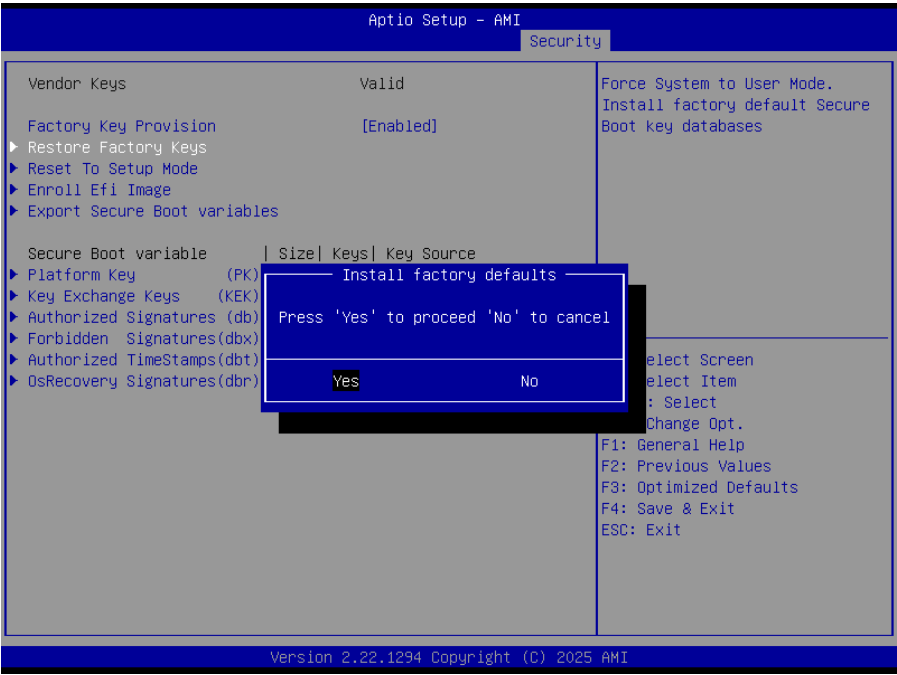


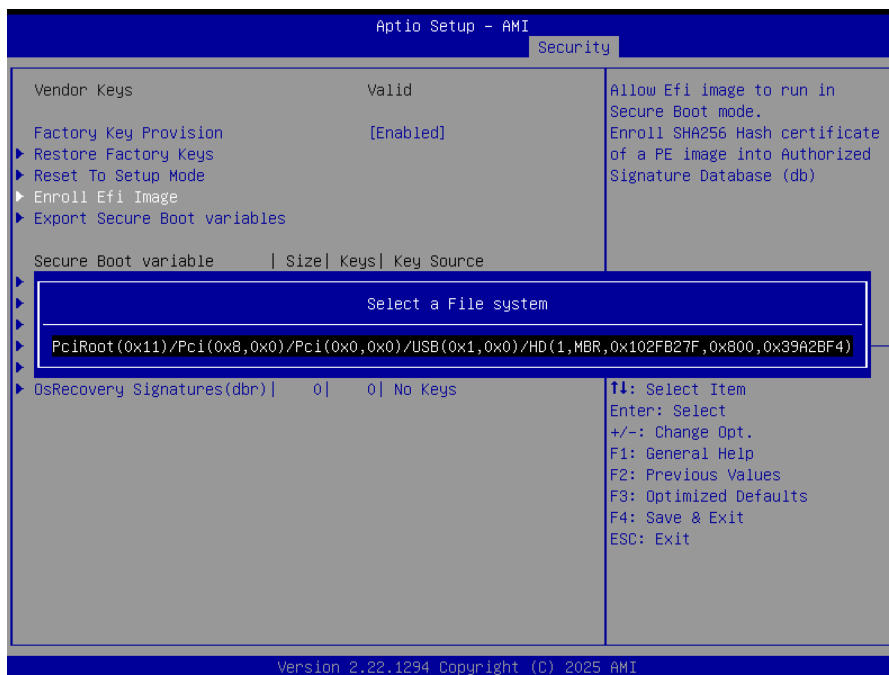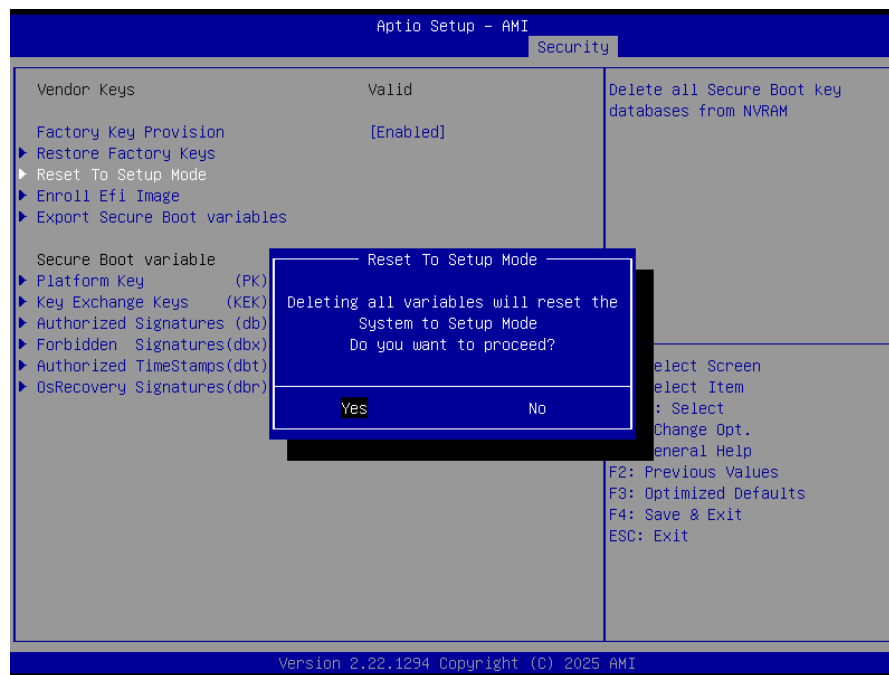


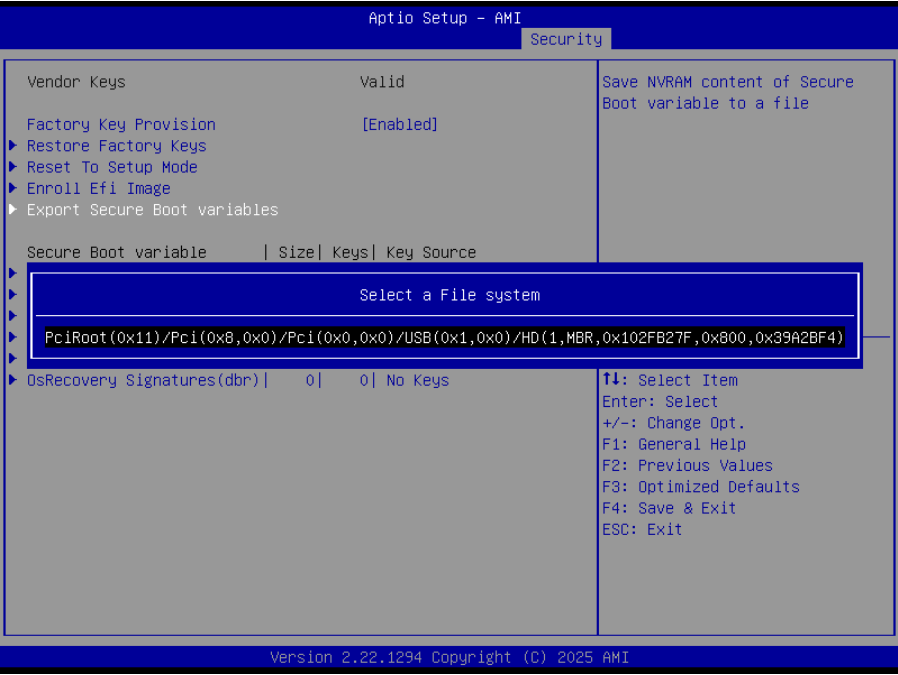

Item	Option	Description
Factory Key Provision	Disabled[Default] Enabled	Install factory default Secure Boot keys after the platform reset and while the Sysstem is in Setup mode.

4.6.7 Boot

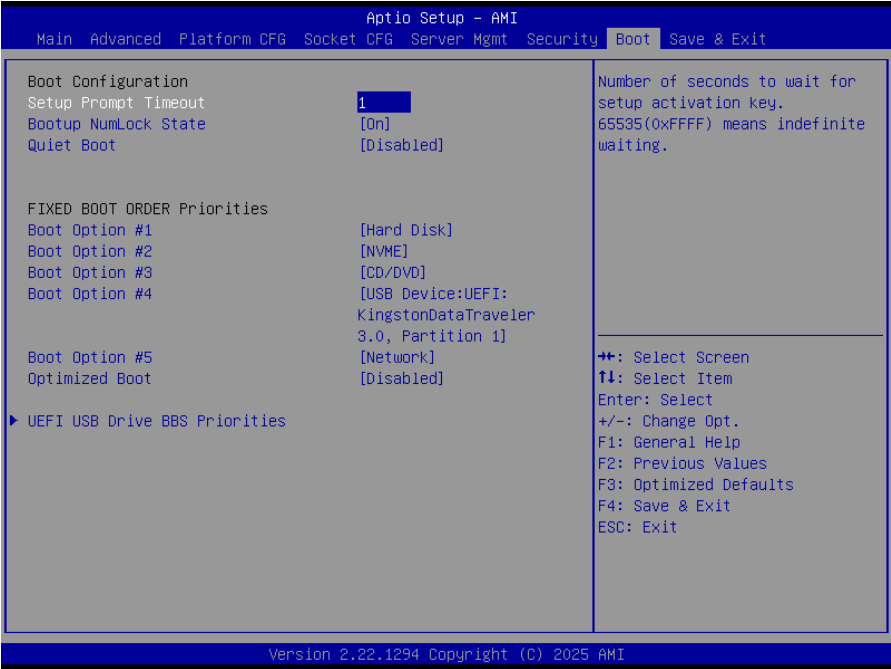


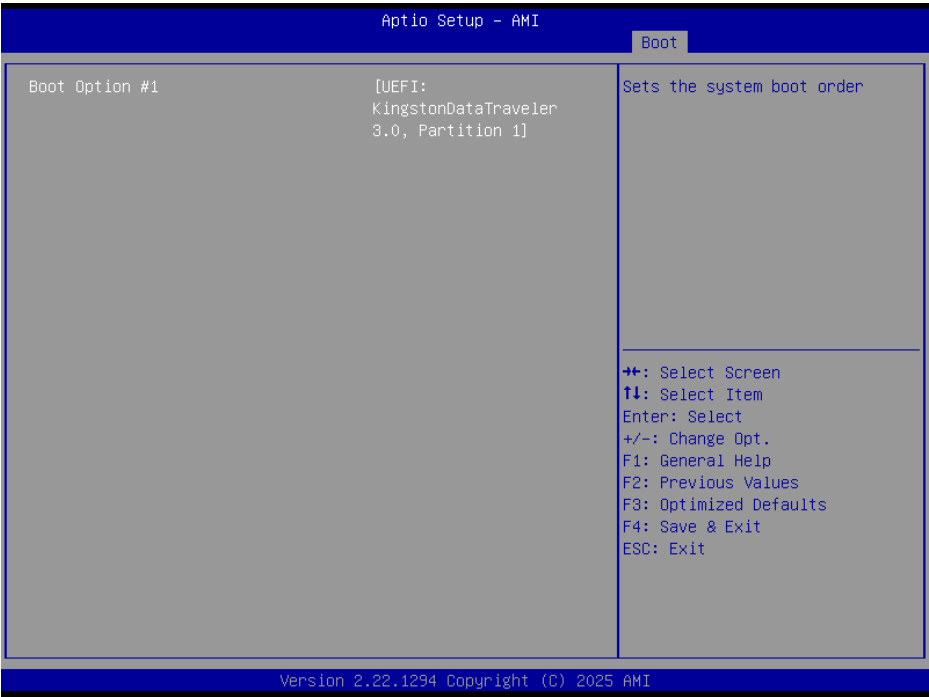

Item	Option	Description
Setup Prompt Timeout	1~ 65535	Set the default timeout before system boot. A value of 65535 will disable the timeout completely.
Bootup NumLock State	On[Default] Off	Select the keyboard NumLock state
Quiet Boot	Disabled[Default] Enabled	Enables or disables Quiet Boot option
Boot Option #1	Hard Disk[Default] NVME CD/DVD SD USB Device Network	Set the system boot order.
Boot Option #2	Hard Disk NVME[Default] CD/DVD SD USB Device Network	Set the system boot order.
Boot Option #3	Hard Disk NVME CD/DVD[Default] SD USB Device Network	Set the system boot order.
Boot Option #4	Hard Disk NVME CD/DVD SD[Default] USB Device	Set the system boot order.

	Network	
Boot Option #5	Hard Disk NVME CD/DVD SD USB Device Network[Default]	Set the system boot order.
Optimized Boot	Disabled[Default] Enabled	Enables or disables Optimized Boot. Enabling Optimized Boot will disable Csm support and disable connecting Network devices to decrease boot time. While disabling Optimized Boot, make sure to restore Csm Support option to previous value before enabling Optimized Boot.

4.6.8 Save and exit

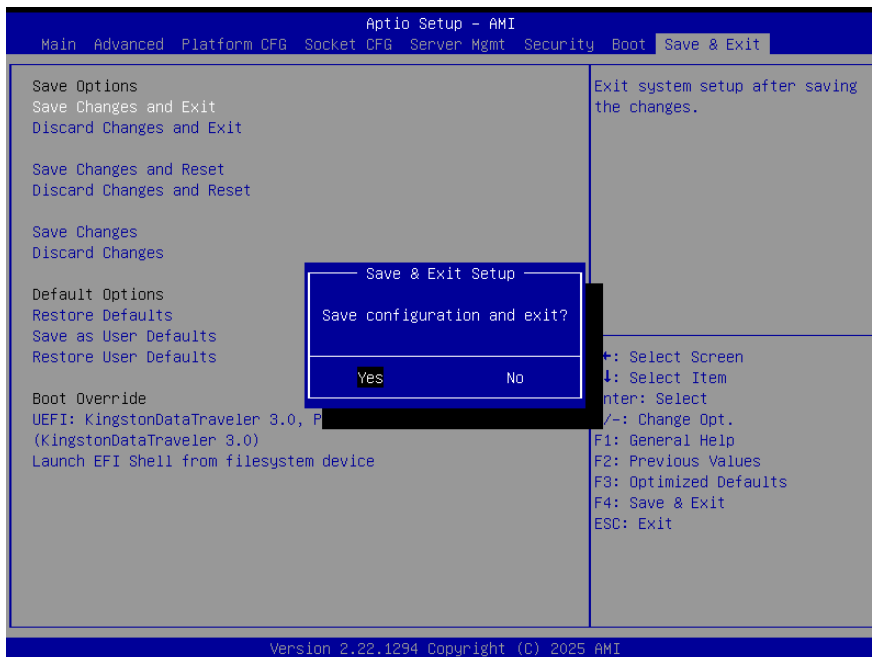

4.6.8.1 Save Changes and Exit

Use the save changes and reset option to save the changes made to the BIOS options and to exit the BIOS configuration setup program.

4.6.8.2 Discard Changes and Exit

Use the Discard changes and Exit option to exit the system without saving the changes made to the BIOS configuration setup program.

4.6.8.3 Save Changes and Reset

Reset the system after saving the changes.

4.6.8.4 Discard Changes and Reset

Any changes made to BIOS settings during this session of the BIOS setup program are discarded. The setup program then exits and reboots the controller.

4.6.8.5 Save Changes

Changes made to BIOS settings during this session are committed to NVRAM. The setup program remains active, allowing further changes.

4.6.8.6 Discard Changes

Any changes made to BIOS settings during this session of the BIOS setup program are discarded. The BIOS setup continues to be active.

4.6.8.7 Restore Defaults

This option restores all BIOS settings to the factory default. This option is useful if the controller exhibits unpredictable behavior due to an incorrect or inappropriate BIOS setting.

4.6.8.8 Save as User Defaults

This option saves a copy of the current BIOS settings as the User Defaults. This option is useful for preserving custom BIOS setup configurations.

4.6.8.9 Restore User Defaults

This option restores all BIOS settings to the user defaults. This option is useful for restoring previously preserved custom BIOS setup configurations.