

R10IAN3S-GST2

10.4" G-WIN GS-Series Full IP65 PCAP Panel PC with Intel® Processor N150



KEY FEATURES

- 10.4-inch 1024 x 768 Resolution with Projected Capacitive Multi-Touch (P-CAP)
- Low power consumption with Intel® Processor N150
- Fanless cooling system design
- Edge-to-edge design
- Full IP65 design with Special M12 Waterproof connectors
- 1 x GbE LAN, 1 x RS232, 1 x USB 2.0

INTRODUCTION

The 10.4" R10IAN3S-GST2 is a Full IP65 industrial panel PC engineered for harsh environments, powered by the Intel® Processor N150 to deliver a perfect balance of low power consumption and reliable, fanless performance. Featuring an edge-to-edge P-CAP multi-touch screen and specialized M12 waterproof connectors, it ensures ultimate protection and seamless connectivity for diverse industrial automation applications.

SPECIFICATIONS

Display

Touch / Glass	Projected Capacitive Multi Touch Screen	Resolution	1024x768
Size	10.4 inches	Contrast Ratio	1000:1
Panel Brightness	1000.0 nits	View Angles	88,88,88,88
Active Area	210.4x157.8 mm		

System Specification

Processor	Intel® Processor N150 6M Cache, up to 3.6 GHz	Memory	8GB(Default) (Default) 16GB (Optional)
Storage	128GB SSD(Default) (Default) 256GB SSD (Optional) 512GB SSD (Optional) 1TB (Optional) 2TB (Optional) 4TB (Optional)	Ethernet controller	1 x Intel® Gigabit Ethernet Controller
Security	TPM 2.0	Operating System	Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 24.04 (Optional)
WLAN	(Optional)	BT	(Optional)

Environment

Operating Humidity	10% to 95% RH	Operating Temperature	-15~55°C
Storage Temperature	-30°C to 60°C	Shock	40g for 11ms
Vibration	1.48/1.90/2.24 g rms for XYZ/ 5-500Hz	IP rating	IP65, Dustproof and Waterproof

Certification

Certification CE, FCC
Compliant with MIL-STD-810F/G for vibration / shock

IO Ports

USB Port	1 x USB 2.0 (M12 type)	Serial Port	1 x RS232/422/485 (Default RS232)(M12 type)
LAN	1 x LAN-10/100/1000 (M12 type)	Indicator	1 x LED Indicator for power 1 x LED Indicator for storage

Mechanical

Dimension	252.41 x 197.8 x 43 mm	Mounting	VESA mount (Default) Front IP65 Panel mount (Optional)
Enclosure	Metal	Cooling System	Fanless Design

Power

Power Rating 9-36V DC (M12 type)


Accessory

Accessory Quick Start Guide (Hardcopy)
M12 Power Cable
M12 Serial Interface Cable
M12 USB/ LAN Cable
I/O Protective Cap x 3

Control

Button 1 x Power Button
1 x Reset Button

DIMENSIONS UNIT:MM

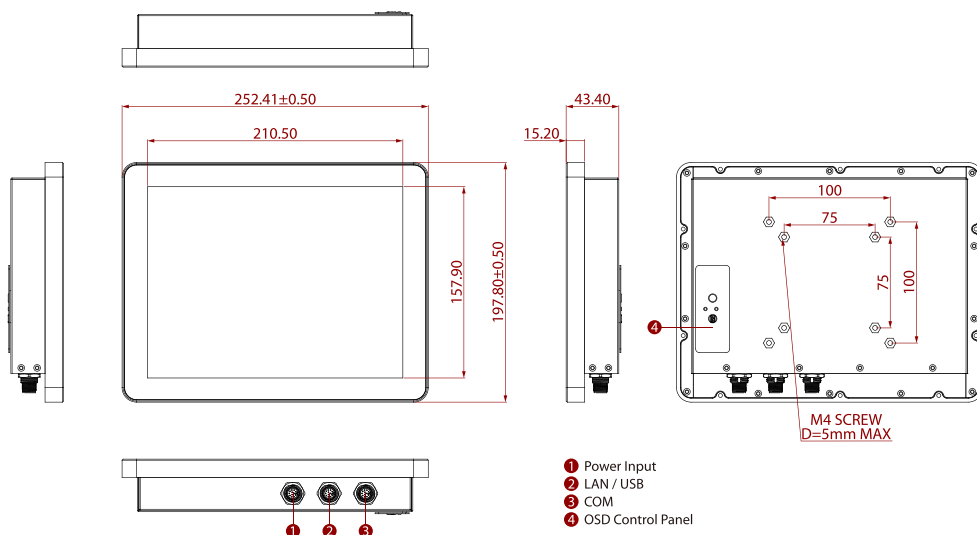

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.